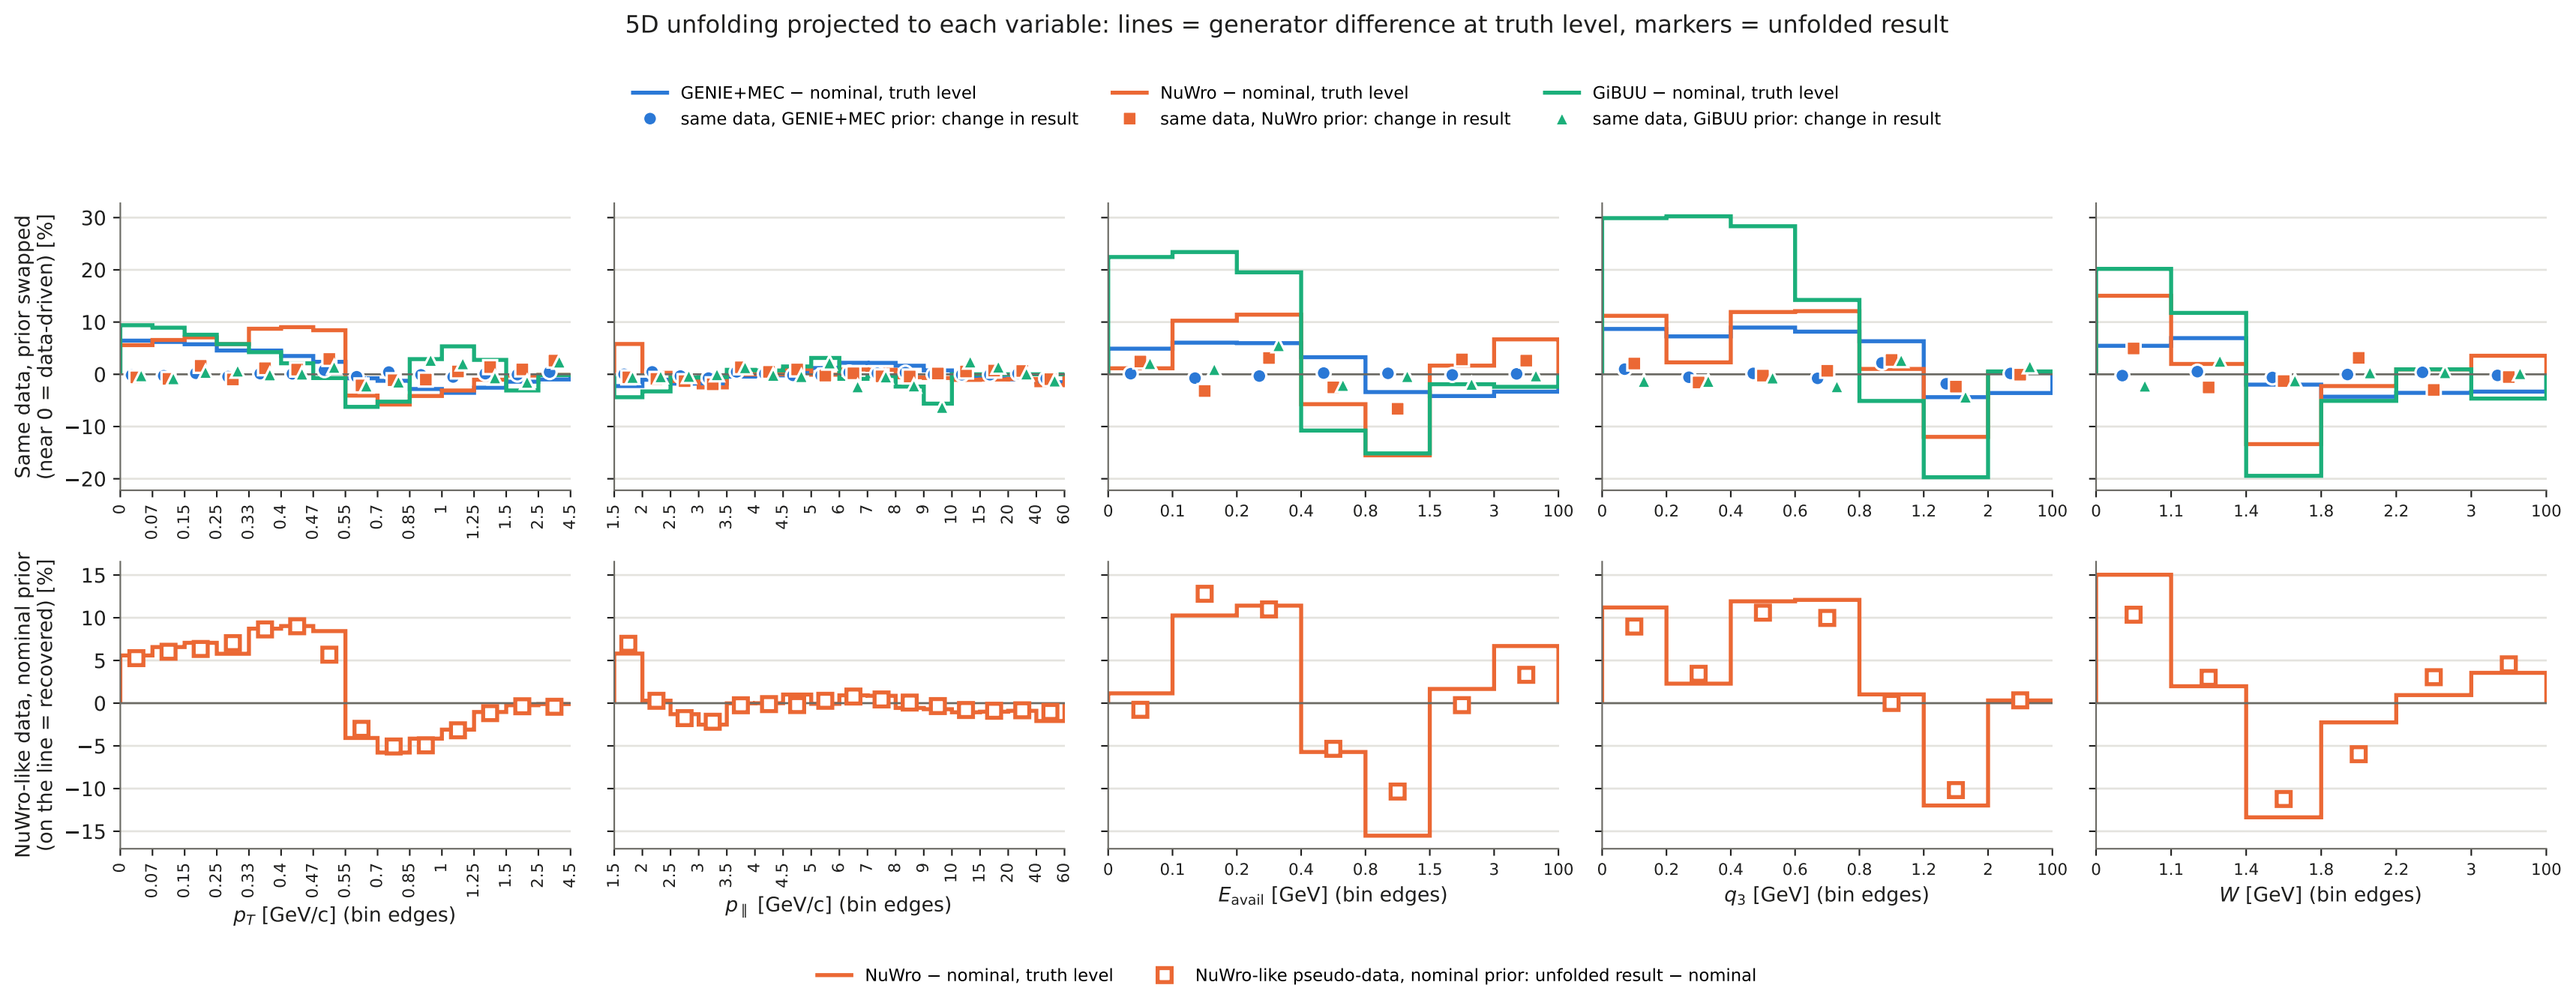
5D unfolding projected to each variable: lines = generator difference at truth level, markers = unfolded result
GENIE+MEC − nominal, truth level
same data, GENIE+MEC prior: change in result
NuWro − nominal, truth level
same data, NuWro prior: change in result
GiBUU − nominal, truth level
same data, GiBUU prior: change in result
Same data, prior swapped
(near 0 = data-driven) [%]
NuWro-like data, nominal prior
(on the line = recovered) [%]
p_T [GeV/c] (bin edges)
$p_\parallel$ [GeV/c] (bin edges)
E_{avail} [GeV] (bin edges)
q_3 [GeV] (bin edges)
W [GeV] (bin edges)
NuWro − nominal, truth level
NuWro-like pseudo-data, nominal prior: unfolded result − nominal