


Postman Requests


1. Getting all users

api:- <http://127.0.0.1:3000/api/users>

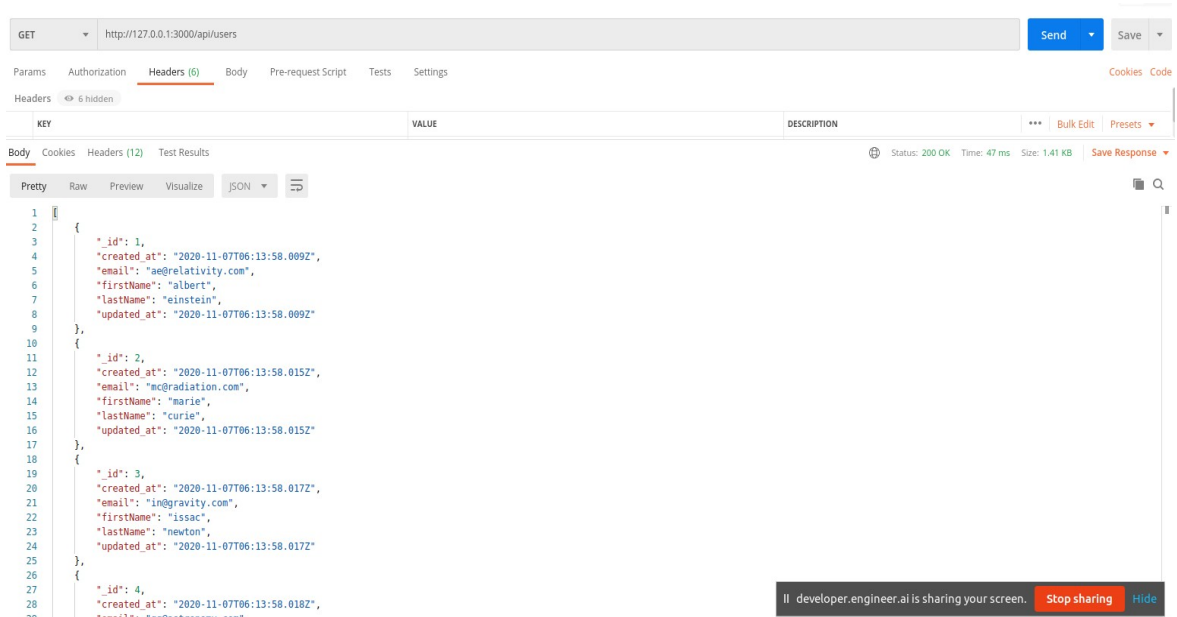

2. Getting a particular user

api:- <http://127.0.0.1:3000/api/users/1>

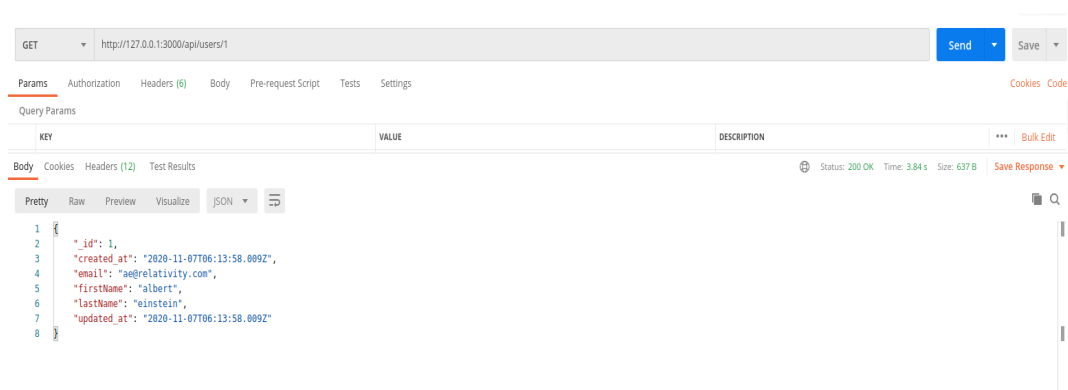

3. Adding a new user

api:- <http://127.0.0.1:3000/api/users/>

POST http://127.0.0.1:3000/api/users/

Params Authorization Headers (8) Body Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "users":
3   {
4     "id": 10,
5     "firstName": "John",
6     "lastName": "Joseph",
7     "email": "josephelias0002@gmail.com"
8   }
9 }
```

Body Cookies Headers (12) Test Results

Pretty Raw Preview Visualize JSON

```
1 {
2   "id": 10,
3   "created_at": "2020-11-07T07:57:59.109Z",
4   "email": "josephelias0002@gmail.com",
5   "firstName": "John",
6   "lastName": "Joseph",
7   "updated_at": "2020-11-07T07:57:59.109Z"
8 }
```

Status: 200 OK Time: 7 ms Size: 642 B Save Response

- Updating a particular user
api:- <http://127.0.0.1:3000/api/users/6> (PATCH)

PATCH http://127.0.0.1:3000/api/users/6

Params Authorization Headers (8) Body Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "users":
3   {
4     "id": 7,
5     "firstName": "John",
6     "lastName": "john",
7     "email": "josephelias0002@gmail.com"
8   }
9 }
```

Body Cookies Headers (12) Test Results

Pretty Raw Preview Visualize JSON

```
1 {
2   "id": 7,
3   "created_at": "2020-11-07T07:00:35.180Z",
4   "email": "josephelias0002@gmail.com",
5   "firstName": "John",
6   "lastName": "john",
7   "updated_at": "2020-11-07T07:09:47.369Z"
8 }
```

Status: 200 OK Time: 9 ms Size: 639 B Save Response

- Destroy a particular user
api:- <http://127.0.0.1:3000/api/users/7> (Delete)

DELETE http://127.0.0.1:3000/api/users/7

Params Authorization Headers (6) Body Pre-request Script Tests Settings

Headers 6 hidden

KEY	VALUE	DESCRIPTION
Deleted user John		

Body Cookies Headers (12) Test Results

Pretty Raw Preview Visualize JSON

Status: 200 OK Time: 52 ms Size: 494 B Save Response

- Typehead
api:- <http://127.0.0.1:3000/api/typeahead/a>

The screenshot shows the REST Client interface. At the top, a GET request is defined with the URL 'http://127.0.0.1:3000/api/typeahead/a'. Below the request bar, the 'Params' tab is selected, showing an empty table with columns 'KEY', 'VALUE', and 'DESCRIPTION'. The 'Body' tab is also visible. The response section shows a status of '200 OK', a time of '1405 ms', and a size of '513 B'. The response body is displayed in JSON format: {"albert", "marie", "issac", "galileo"}. The interface includes tabs for 'Params', 'Authorization', 'Headers', 'Body', 'Pre-request Script', 'Tests', and 'Settings'. There are also buttons for 'Send', 'Save', and 'Bulk Edit'.