


Groups

Description

The Groups application is used to define roles or user categories within SaltOS4. Each group aggregates permissions that determine what its members can see or do in the system. Groups simplify the administration of access control by allowing permission management at the group level instead of per user.

List view

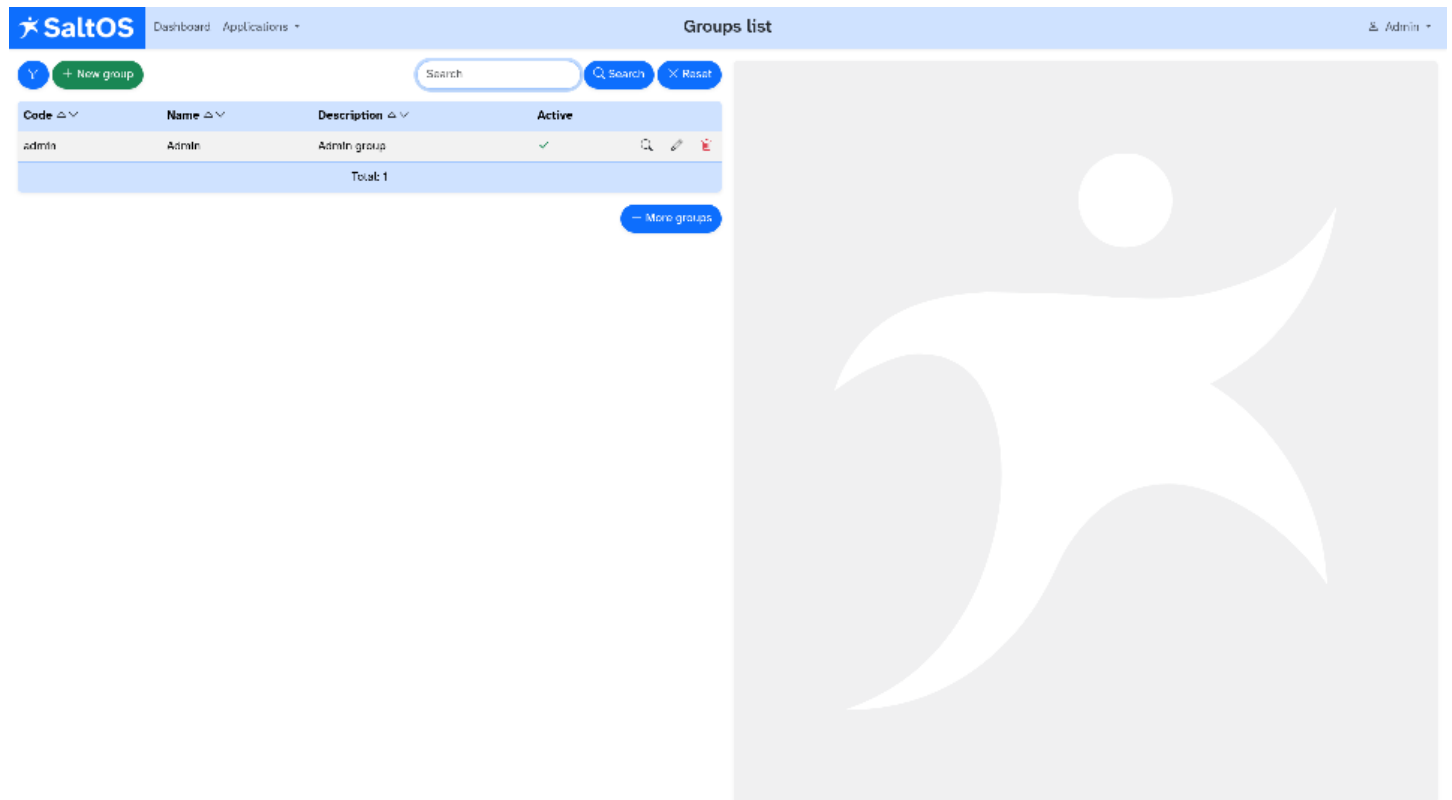

The following fields are displayed in the list view:

- Code: Internal identifier or reference code of the group.
- Name: Name or title used to identify the group.
- Description: Explanation of the purpose or scope of the group.
- Active: Indicates whether this group is enabled for use.

Form view

This view is used to create, view or edit user groups.

In **create** mode, a new group is defined.

SaltOS

Dashboard Applications +

New group

Admin

+ New group

Search

Search

Reset

Active

Code	Name	Description	Active
admin	Admin	Admin group	✓
Total: 1			

More groups

Code *

Name *

Description *

Users

Admin (admin)

Applications and permissions

	main	menu	create	widget	action	config	help
login	Allow						
dashboard	Allow					Allow	Allow
tester	Allow	Allow					
users							
groups							
widgets				Allow			
emails							
emails.accounts							
pushlog							
cronlog							
uploading							
configlog							
trashlog							
tokenslog							
certs							
fileslog							
customers							
leads							
quotes							

In **view** mode, the group details and assigned permissions are shown.

SaltOS

Dashboard Applications +

Detail of the group

Admin

+ New group

Search

Search

Reset

Active

Code	Name	Description	Active
admin	Admin	Admin group	✓
Total: 1			

More groups

Code *

admin

Name *

Admin

Description *

Admin group

Users

Admin (admin)

Applications and permissions

	main	menu	create	widget	action	config	help
login	Allow						
dashboard	Allow					Allow	Allow
tester	Allow	Allow					
users	Allow	Allow	Allow	Allow	Allow	Allow	Allow
groups	Allow	Allow	Allow	Allow	Allow	Allow	Allow
widgets				Allow			
emails	Allow	Allow	Allow	Allow	Allow	Allow	Allow
emails.accounts	Allow		Allow		Allow	Allow	Allow
pushlog	Allow	Allow					Allow
cronlog	Allow	Allow					Allow
uploading	Allow	Allow					Allow
configlog	Allow	Allow	Allow				Allow
trashlog	Allow	Allow					Allow
tokenslog	Allow	Allow					Allow
certs	Allow	Allow	Allow				Allow
fileslog	Allow	Allow					Allow
customers	Allow	Allow	Allow	Allow	Allow	Allow	Allow
leads	Allow	Allow	Allow	Allow	Allow	Allow	Allow
quotes	Allow	Allow	Allow	Allow	Allow	Allow	Allow

In **edit** mode, you can update the group's name, description, and permission set.

Dashboard Applications

Modify this group

Admin

Y

+ New group

Search

Q Search

X Reset

Active

Code	Name	Description	Active
admin	Admin	Admin group	✓
Total: 1			

More groups

Code

Name

Description

Users

Admin (admin)

➔

➔

Applications and permissions

	main	menu	create	widget	action	config	help
login	Allow						
dashboard	Allow					Allow	Allow
tester	Allow	Allow					
users	Allow	Allow	Allow	Allow	Allow	Allow	Allow
groups	Allow	Allow	Allow	Allow	Allow	Allow	Allow
widgets				Allow			
emails	Allow	Allow	Allow	Allow	Allow	Allow	Allow
emails.accounts	Allow		Allow		Allow	Allow	Allow
pushlog	Allow	Allow					Allow
cronlog	Allow	Allow					Allow
uploadlog	Allow	Allow					Allow
configlog	Allow	Allow	Allow				Allow
trashlog	Allow	Allow					Allow
tokenslog	Allow	Allow					Allow
certs	Allow	Allow	Allow				Allow
fileslog	Allow	Allow					Allow
customers	Allow	Allow	Allow	Allow	Allow	Allow	Allow
leads	Allow	Allow	Allow	Allow	Allow	Allow	Allow
quotes	Allow	Allow	Allow	Allow	Allow	Allow	Allow

The form includes the following fields:

- **Active:** Indicates whether this group is enabled for use.
- **Code:** Internal identifier or reference code of the group.
- **Name:** Name or title used to identify the group.
- **Description:** Explanation of the purpose or scope of the group.
- **Users:** List of users assigned to this group.
- **Applications and permissions:** Matrix of allowed apps and operations granted to this group.

Delete

Groups can be deleted only if no users are assigned to them.

If the group is in use, it is recommended to disable it to preserve historical access information.