


Mixed semantic-structural task

Each node receives a unique key k_i and a random value $v_i \in \{0, \dots, 7\}$; q and s are marked on every C_{16} .

Semantic mode

retrieve the marked source value

50% of examples

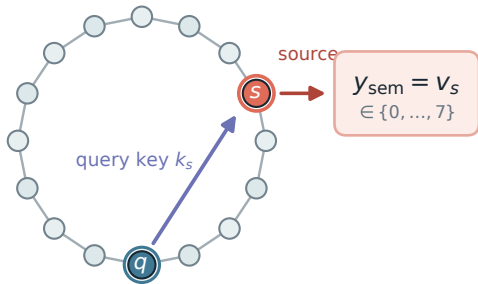


graph distance does not predict v_s

Structural mode

recover the query-source distance

50% of examples

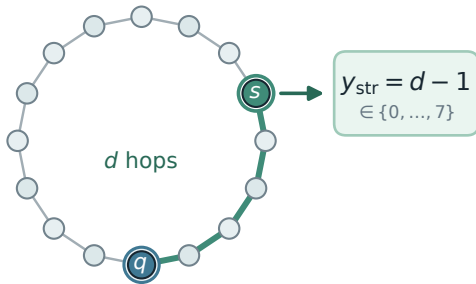

node keys and values do not predict d