Machine-Level Programming IV: Data

CS-392-A Systems Programming

Instructors:

Georgios Portokalidis – Stevens Institute of Technology

Today

Arrays

- One-dimensional
- Multi-dimensional (nested)
- Multi-level

Structures


- Allocation
- Access
- Alignment

Array Allocation

Basic Principle

```
T A[L];
```

- Array of data type T and length L
- Contiguously allocated region of L * sizeof (T) bytes in memory

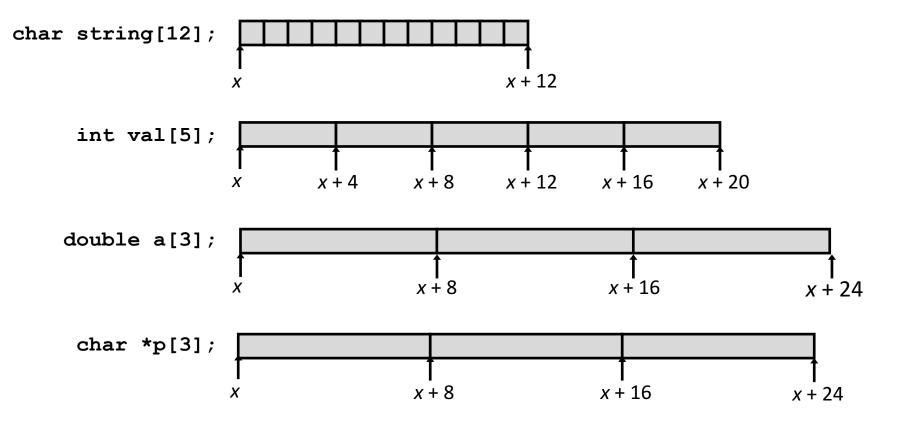


Array Access

■ Basic Principle

```
T \mathbf{A}[L];
```

- Array of data type T and length L
- Identifier A can be used as a pointer to array element 0: Type T*




Reference	Type	Value
val[4]	int	3
val	int *	X
val+1	int *	<i>x</i> + 4
&val[2]	int *	<i>x</i> + 8
val [5]	int	? ?
*(val+1)	int	5
val + <i>i</i>	int *	x + 4i

Array Example


```
#define ZLEN 5
typedef int zip_dig[ZLEN];

zip_dig cmu = { 1, 5, 2, 1, 3 };
zip_dig sit = { 0, 7, 0, 3, 0 };
zip_dig ucb = { 9, 4, 7, 2, 0 };
```

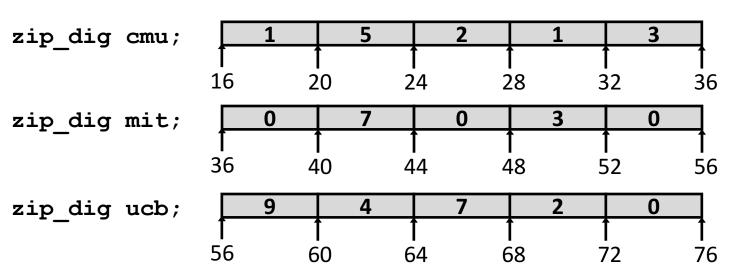

- Declaration "zip_dig cmu" equivalent to "int cmu[5]"
- Example arrays were allocated in successive 20 byte blocks
 - Not guaranteed to happen in general

Array Accessing Example



```
int get_digit
  (zip_dig z, int digit)
{
  return z[digit];
}
```

IA32

```
# %rdi = z
# %rsi = digit
movl (%rdi, %rsi, 4), %eax # z[digit]
```

- Register %rdi contains starting address of array
- Register %rsi contains array index
- Desired digit at %rdi + 4*%rsi
- Use memory reference (%rdi,%rsi,4)

Array Loop Example

```
void zincr(zip_dig z) {
   size_t i;
   for (i = 0; i < ZLEN; i++)
      z[i]++;
}</pre>
```

```
# %rdi = z
                         \# i = 0
 movl $0, %eax
                         # goto middle
 jmp .L3
.L4:
                         # loop:
 addl $1, (%rdi,%rax,4) # z[i]++
 addq $1, %rax
                         # 1++
.L3:
                         # middle
 cmpq $4, %rax
                         # i:4
                         # if <=, goto loop</pre>
 jbe .L4
 rep; ret
```

Multidimensional (Nested) Arrays

Declaration

 $T \mathbf{A}[R][C];$

- 2D array of data type T
- R rows, C columns
- Type T element requires K bytes


Array Size

R * C * K bytes


Arrangement

Row-Major Ordering

int A[R][C];




4*R*C Bytes

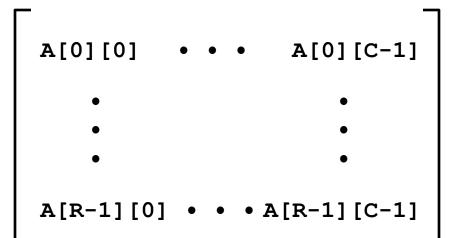

Nested Array Example

```
#define PCOUNT 4
zip_dig pgh[PCOUNT] =
   {{1, 5, 2, 0, 6},
    {1, 5, 2, 1, 3},
    {1, 5, 2, 1, 7},
    {1, 5, 2, 2, 1 }};
```




- "zip dig pgh[4]" equivalent to "int pgh[4][5]"
 - Variable pgh: array of 4 elements, allocated contiguously
 - Each element is an array of 5 int's, allocated contiguously
- "Row-Major" ordering of all elements in memory

Nested Array Row Access


Row Vectors

- A[i] is array of C elements
- Each element of type T requires K bytes
- Starting address A + i * (C * K)

int A[R][C];

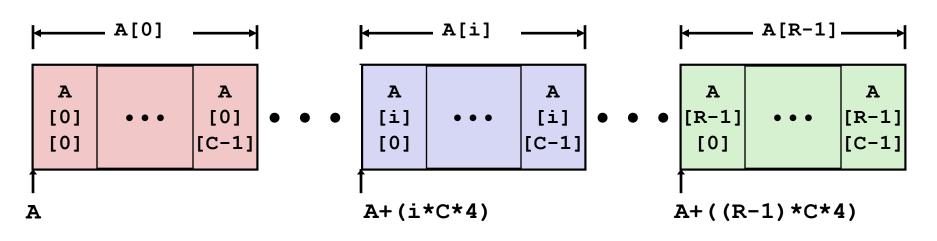

Nested Array Row Access Code

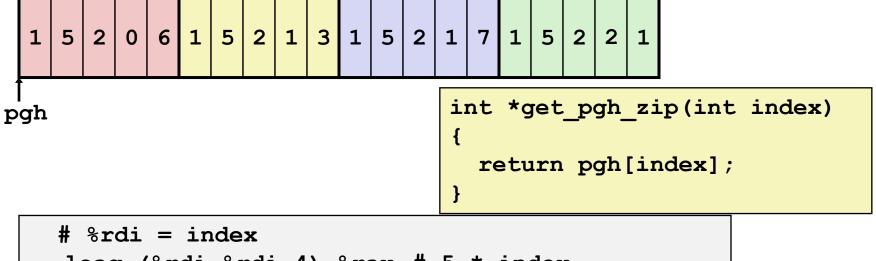

```
# %rdi = index
leaq (%rdi,%rdi,4),%rax # 5 * index
leaq pgh(,%rax,4),%rax # pgh + (20 * index)
```

Row Vector

- pgh[index] is array of 5 int's
- Starting address pgh+20*index

Machine Code


- Computes and returns address
- Compute as pgh + 4* (index+4*index)

Nested Array Element Access

Array Elements

- **A[i][j]** is element of type *T*, which requires *K* bytes
- Address **A** + i * (C * K) + j * K = A + (i * C + j) * K

int A[R][C];

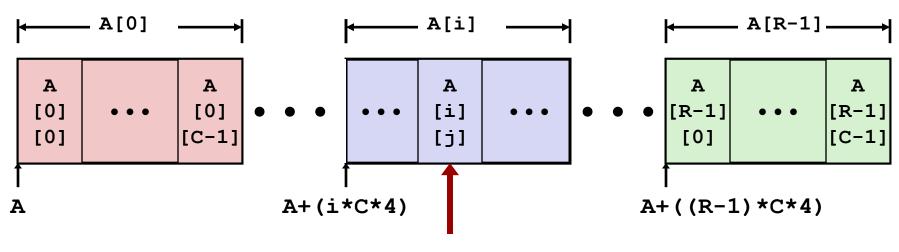

$$A+(i*C*4)+(j*4)$$

Nested Array Element Access Code

```
1 5 2 0 6 1 5 2 1 3 1 5 2 1 7 1 5 2 2 1

pgh

int get_pgh_digit
    (int index, int dig)
{
    return pgh[index][dig];
}
```

```
leaq (%rdi,%rdi,4), %rax  # 5*index
addl %rax, %rsi  # 5*index+dig
movl pgh(,%rsi,4), %eax  # M[pgh + 4*(5*index+dig)]
```

Array Elements


- pgh[index][dig] is int
- Address: pgh + 20*index + 4*dig
 - = pgh + 4*(5*index + dig)

Multi-Level Array Example

```
zip_dig cmu = { 1, 5, 2, 1, 3 };
zip_dig sit = { 0, 7, 0, 3, 0 };
zip_dig ucb = { 9, 4, 7, 2, 0 };
```

```
#define UCOUNT 3
int *univ[UCOUNT] = {sit, cmu, ucb};
```

- Variable univ denotes array of 3 elements
- **■** Each element is a pointer
 - 8 bytes
- Each pointer points to array of int's

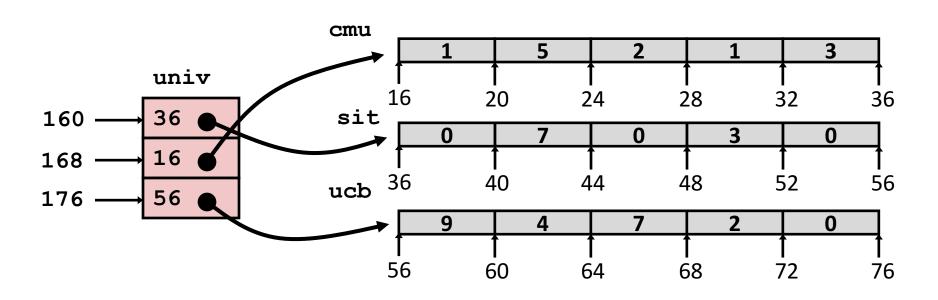

Element Access in Multi-Level Array

```
int get_univ_digit
  (size_t index, size_t digit)
{
  return univ[index][digit];
}
```

```
salq $2, %rsi # 4*digit
addq univ(,%rdi,8), %rsi # p = univ[index] + 4*digit
movl (%rsi), %eax # return *p
ret
```

Computation

- Element access Mem [Mem [univ+8*index]+4*digit]
- Must do two memory reads
 - First get pointer to row array
 - Then access element within array


Array Element Accesses


Nested array

```
int get_pgh_digit
   (size_t index, size_t digit)
{
   return pgh[index][digit];
}
```

Multi-level array

```
int get_univ_digit
  (size_t index, size_t digit)
{
  return univ[index][digit];
}
```



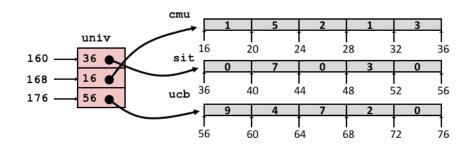

Accesses looks similar in C, but address computations very different:

Mem[pgh+20*index+4*digit] Mem[Mem[univ+8*index]+4*digit]

N X N Matrix Code

- Fixed dimensions
 - Know value of N at compile time
- Variable dimensions, explicit indexing
 - Traditional way to implement dynamic arrays
- Variable dimensions, implicit indexing
 - Now supported by gcc

16 X 16 Matrix Access

Array Elements

- Address **A** + i * (C * K) + j * K
- C = 16, K = 4

```
/* Get element a[i][j] */
int fix_ele(fix_matrix a, size_t i, size_t j) {
  return a[i][j];
}
```

```
# a in %rdi, i in %rsi, j in %rdx
salq $6, %rsi  # 64*i
addq %rsi, %rdi  # a + 64*i
movl (%rdi,%rdx,4), %eax # M[a + 64*i + 4*j]
ret
```

n X n Matrix Access

Array Elements

- Address **A** + i * (C * K) + j * K
- C = n, K = 4
- Must perform integer multiplication

```
/* Get element a[i][j] */
int var_ele(size_t n, int a[n][n], size_t i, size_t j)
{
  return a[i][j];
}
```

```
# n in %rdi, a in %rsi, i in %rdx, j in %rcx
imulq %rdx, %rdi  # n*i
leaq (%rsi,%rdi,4), %rax # a + 4*n*i
movl (%rax,%rcx,4), %eax # a + 4*n*i + 4*j
ret
```

Today

Arrays


- One-dimensional
- Multi-dimensional (nested)
- Multi-level

Structures

- Allocation
- Access
- Alignment

Structure Representation


```
struct rec {
   int a[4];
   size_t i;
   struct rec *next;
};
```

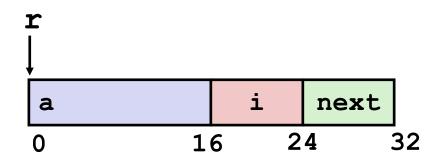

- Structure represented as block of memory
 - Big enough to hold all of the fields
- Fields ordered according to declaration
 - Even if another ordering could yield a more compact representation
- Compiler determines overall size + positions of fields
 - Machine-level program has no understanding of the structures in the source code

Generating Pointer to Structure Member

```
struct rec {
   int a[4];
   size_t i;
   struct rec *next;
};
```

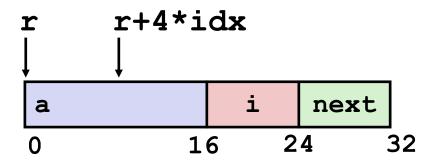

Generating Pointer to Array Element

- Offset of each structure member determined at compile time
- Compute as r + 4*idx


```
int *get_ap
  (struct rec *r, size_t idx)
{
  return &r->a[idx];
}
```

```
# r in %rdi, idx in %rsi
leaq (%rdi,%rsi,4), %rax
ret
```

Following Linked List

C Code


```
void set_val
  (struct rec *r, int val)
{
  while (r) {
    int i = r->i;
    r->a[i] = val;
    r = r->next;
  }
}
```

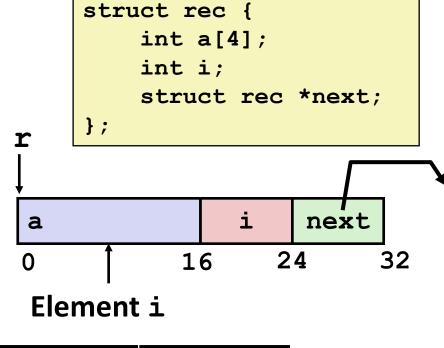

Register	Value
%rdi	r
%rsi	val

Structures & Alignment


Unaligned Data



```
struct S1 {
  char c;
  int i[2];
  double v;
} *p;
```

Aligned Data

- Primitive data type requires K bytes
- Address must be multiple of *K*

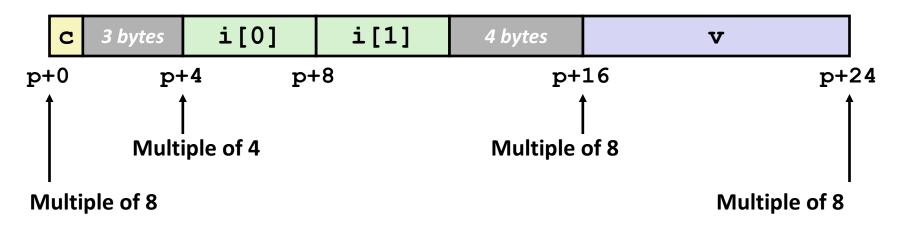

Alignment Principles

Aligned Data

- Primitive data type requires K bytes
- Address must be multiple of *K*
- Required on some machines; advised on x86-64

Motivation for Aligning Data

- Memory accessed by (aligned) chunks of 4 or 8 bytes (system dependent)
 - Inefficient to load or store datum that spans quad word boundaries
 - Virtual memory trickier when datum spans 2 pages

Compiler

Inserts gaps in structure to ensure correct alignment of fields

Specific Cases of Alignment (x86-64)

- 1 byte: char, ...
 - no restrictions on address
- 2 bytes: short, ...
 - lowest 1 bit of address must be 02
- 4 bytes: int, float, ...
 - lowest 2 bits of address must be 002
- 8 bytes: double, long, char *, ...
 - lowest 3 bits of address must be 0002
- 16 bytes: long double (GCC on Linux)
 - lowest 4 bits of address must be 00002

Satisfying Alignment with Structures

Within structure:

Must satisfy each element's alignment requirement

Overall structure placement

- Each structure has alignment requirement K
 - **K** = Largest alignment of any element
- Initial address & structure length must be multiples of K

Example:

K = 8, due to double element

```
        c
        3 bytes
        i[0]
        i[1]
        4 bytes
        v

        p+0
        p+4
        p+8
        p+16
        p+24


        Multiple of 4
        Multiple of 8
        Multiple of 8

Multiple of 8
```

Meeting Overall Alignment Requirement

- For largest alignment requirement K
- Overall structure must be multiple of K


```
struct S2 {
  double v;
  int i[2];
  char c;
} *p;
```

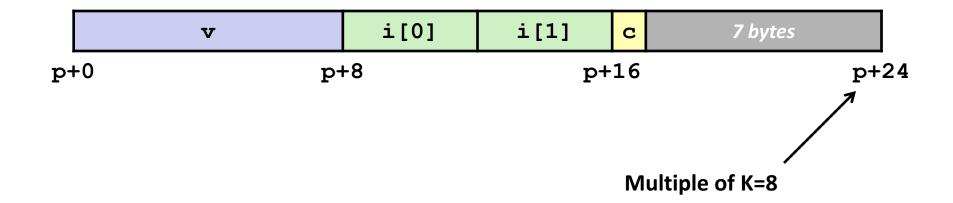


Arrays of Structures

- Overall structure length multiple of K
- Satisfy alignment requirement for every element


```
struct S2 {
  double v;
  int i[2];
  char c;
} a[10];
```





Accessing Array Elements


- Compute array offset 12*idx
 - sizeof (S3), including alignment spacers
- Element j is at offset 8 within structure
- Assembler gives offset a+8
 - Resolved during linking





```
short get_j(int idx)
{
   return a[idx].j;
}
```

```
# %rdi = idx
leaq (%rdi,%rdi,2),%rax # 3*idx
movzwl a+8(,%rax,4),%eax
```




Saving Space

Put large data types first

```
struct S4 {
  char c;
  int i;
  char d;
} *p;
struct S5 {
  int i;
  char c;
  char d;
} *p;
```

■ Effect (K=4)



Summary

Arrays

- Elements packed into contiguous region of memory
- Use index arithmetic to locate individual elements

Structures

- Elements packed into single region of memory
- Access using offsets determined by compiler
- Possible require internal and external padding to ensure alignment

Combinations

Can nest structure and array code arbitrarily

Floating Point

Data held and operated on in XMM registers


Decl	A <i>n</i>			*An			
	Cmp	Bad	Size	Cmp	Bad	Size	
int A1[3]							
int *A2							


Cmp: Compiles (Y/N)

Bad: Possible bad pointer reference (Y/N)

Size: Value returned by sizeof

Decl	A <i>n</i>			*An			
	Cmp	Bad	Size	Cmp	Bad	Size	
int A1[3]	Y	N	12	Y	N	4	
int *A2	Y	N	8	Y	Y	4	



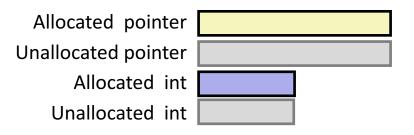

- Cmp: Compiles (Y/N)
- Bad: Possible bad pointer reference (Y/N)
- Size: Value returned by sizeof


Decl		An		*An		*An			**An	
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size	
int A1[3]										
int *A2[3]										
int (*A3)[3]										
int (*A4[3])										

Cmp: Compiles (Y/N)

Bad: Possible bad pointer reference (Y/N)

Size: Value returned by sizeof

Decl		An		*A <i>n</i>		*An **A		**An	An .	
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size	
int A1[3]	Y	N	12	Y	N	4	N	-	_	
int *A2[3]	Y	N	24	Y	N	8	Y	Y	4	
int (*A3)[3]	Y	N	8	Y	Y	12	Y	Y	4	
int (*A4[3])	Y	N	24	Y	N	8	Y	Y	4	

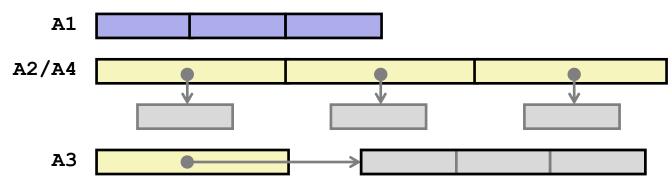


	Allocated pointer
	Unallocated pointer
	Allocated int
36	Unallocated int

Decl	A <i>n</i>			*A <i>n</i>			**An		
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
int A1[3][5]									
int *A2[3][5]									
int (*A3)[3][5]									
int *(A4[3][5])									
int (*A5[3])[5]									

- Cmp: Compiles (Y/N)
- Bad: Possible bad pointer reference (Y/N)
- Size: Value returned by sizeof

Decl	***An			
	Cmp	Bad	Size	
int A1[3][5]				
int *A2[3][5]				
int (*A3)[3][5]				
int *(A4[3][5])				
int (*A5[3])[5]				

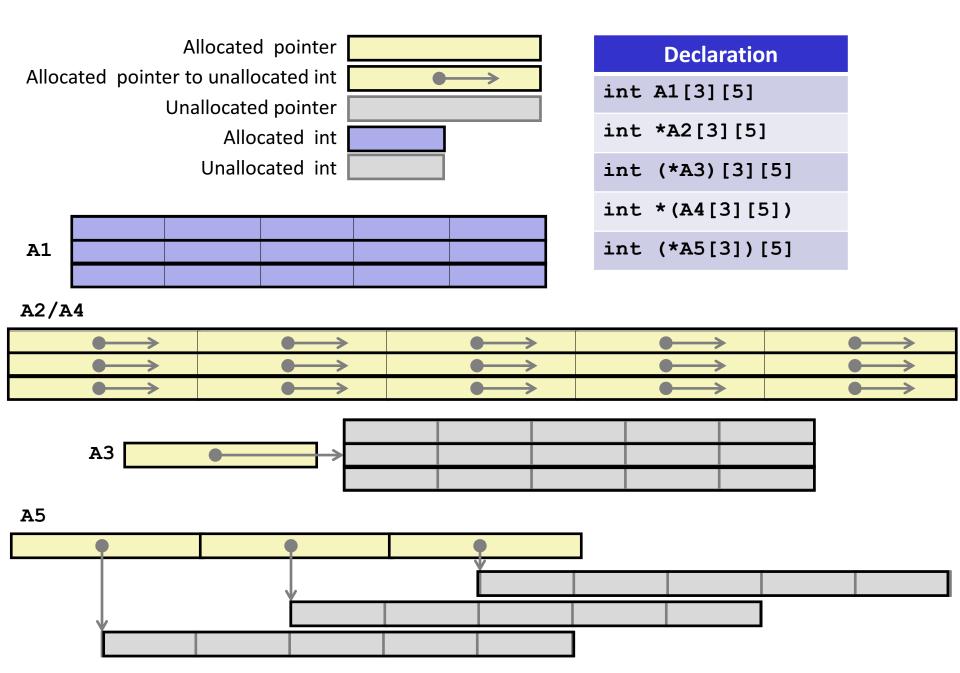

Decl	An			*A <i>n</i>			**An		
	Cmp	Bad	Size	Cmp	Bad	Size	Cmp	Bad	Size
int A1[3][5]	Y	N	60	Y	N	20	Y	N	4
int *A2[3][5]	Y	N	120	Y	N	40	Y	N	8
int (*A3)[3][5]	Y	N	8	Y	Y	60	Y	Y	20
int *(A4[3][5])	Y	N	120	Y	N	40	Y	N	8
int (*A5[3])[5]	Y	N	24	Y	N	8	Y	Y	20

- Cmp: Compiles (Y/N)
- Bad: Possible bad pointer reference (Y/N)
- Size: Value returned by sizeof

Decl	***An			
	Cmp	Bad	Size	
int A1[3][5]	N	_	_	
int *A2[3][5]	Y	Y	4	
int (*A3)[3][5]	Y	Y	4	
int *(A4[3][5])	Y	Y	4	
int (*A5[3])[5]	Y	Y	4	

Reading

■ Book sections 3.8-3.9