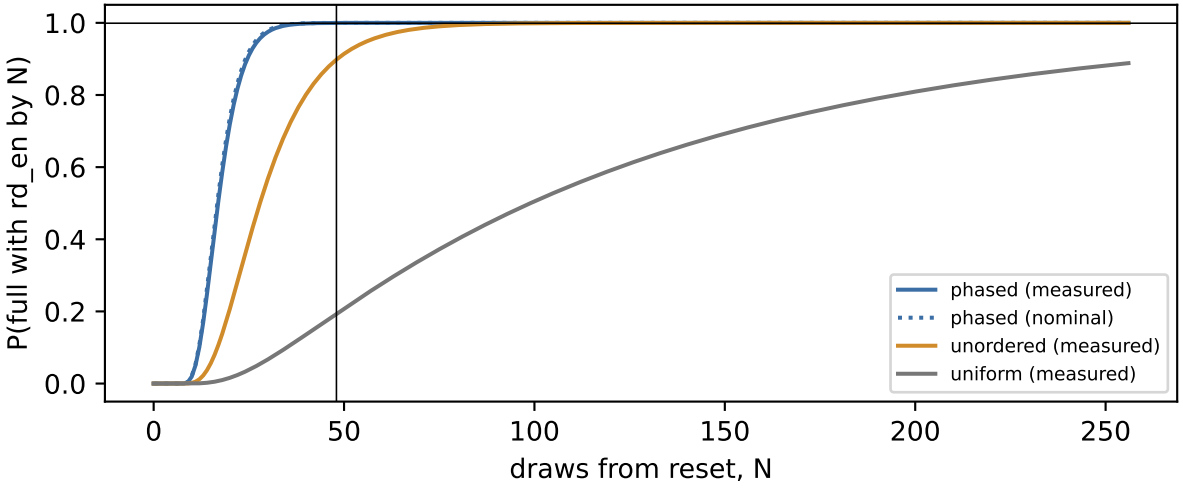
1.0
0.8
0.6
0.4
0.2
0.0
P(full with rd_en by N)
0
50
100
150
200
250
draws from reset, N
phased (measured)
phased (nominal)
unordered (measured)
uniform (measured)