

■ HOW IT WORKS

Your agents call **other** **agents.** Who are they acting for?

How Control Tower follows the chain.

Swipe →



Control Tower

agentcontroltower.app

■ 1 / THE GAP

**support-bot may not
touch finance tools.
research-agent may.
support-bot can
ask research-agent.**




Control Tower

★ [joshmaster2165/controltower](#)

Every hop carries who started it

When one agent calls another through an MCP tool, an HTTP API or A2A, Control Tower hands the called agent a signed delegation token.

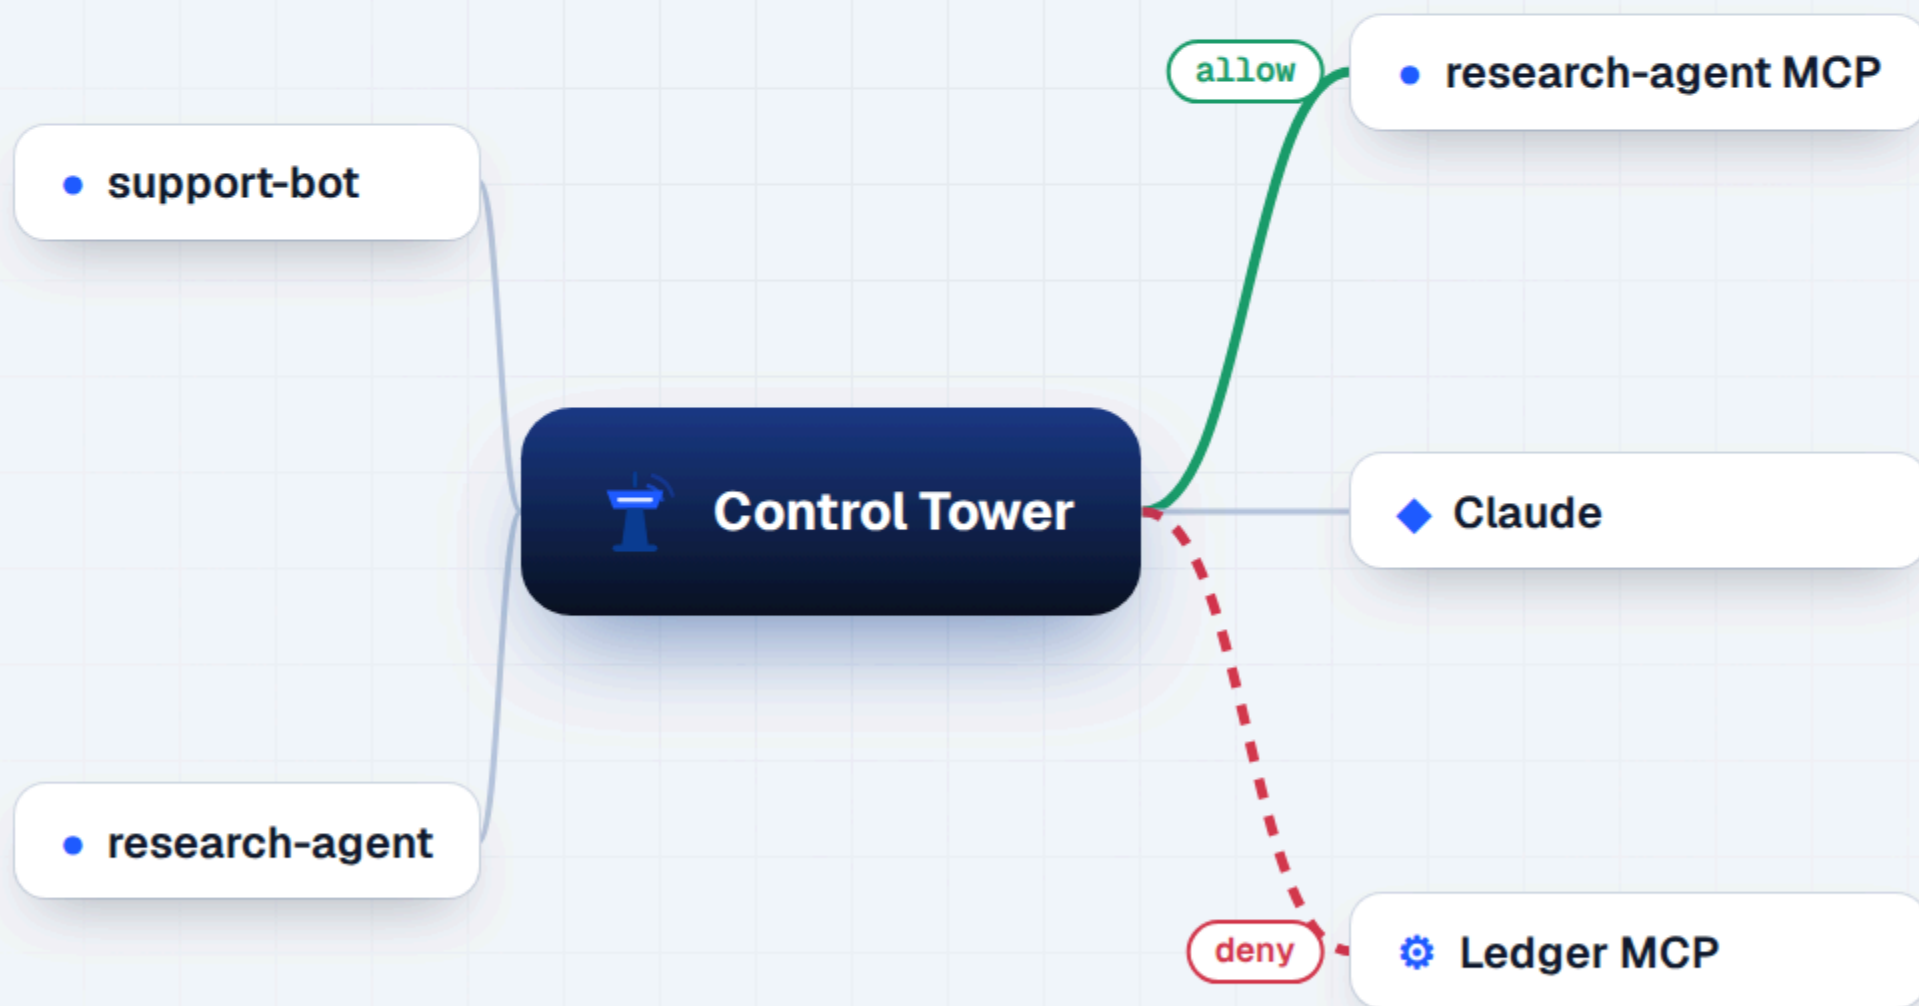

Control Tower

★ `joshmaster2165/controltower`

One header on the called agent

Its model, MCP and HTTP calls are now recorded as made **for** support-bot.



```
token = req.headers.get("x-ct-delegation")
client = OpenAI(
    base_url="http://localhost:4000/v1",
    api_key=RESEARCH_AGENT_KEY,
    default_headers={"x-ct-delegation": token},
)
```



Match on **on_behalf_of**

Anywhere up the chain, however many agents deep.



```
gates:  
- name: No finance on behalf of support  
match:  
on_behalf_of: [team:support]  
servers: [ledger]  
effect: deny
```



The guardrails on the chain

- Keys that act only for others are refused without a valid token
- A calls B calls A: refused as a loop
- Chains stop at 8 agents deep
- Tokens are signed, expire in 15 min, never logged





Star it. Fork it. Ship safer agents.

Open source, self-hosted, Apache-2.0.

★ github.com/joshmaster2165/controltower

`agentcontroltower.app`