

Setlog: Design System

Styling approach: React + Vite, CSS Modules, tokens as CSS custom properties on :root. Black and white. Base unit 8px. Sketches drawn from the wireframes in 02.

1. Colour tokens (5 colours)

	--color-primary #111111 Buttons, active nav, chart line, headings
	--color-bg #FFFFFF Page background, text on primary
	--color-surface #F5F5F5 Cards, panels, set list
	--color-text-muted #595959 Labels, captions, dates
	--color-border #767676 Input borders, dividers, icons

Contrast checks (WCAG ratio)

Aa 12	#111111 on #FFFFFF body text	18.9 : 1 PASS
Aa 12	#FFFFFF on #111111 primary button	18.9 : 1 PASS
Aa 12	#111111 on #F5F5F5 text on surface	17.3 : 1 PASS
Aa 12	#595959 on #FFFFFF muted text	7.0 : 1 PASS
Aa 12	#595959 on #F5F5F5 muted on surface	6.4 : 1 PASS
Aa 12	#767676 on #FFFFFF borders (3:1 needed)	4.5 : 1 PASS

Text needs 4.5 : 1. Borders and icons need 3 : 1.

2. Type scale

Font stack: system-ui, -apple-system, Segoe UI, Roboto, sans-serif

Bench press 8 x 60 kg

Heading 24px Bold --font-size-lg
Screen titles, session date

Bench press 8 x 60 kg

Body 16px Regular --font-size-md
Inputs, buttons, set rows

Bench press 8 x 60 kg

Small 14px Regular --font-size-sm
Labels, captions, nav

Numbers in set rows use tabular figures
(font-variant-numeric: tabular-nums) so 60 and 65 line up.

Line height 1.5 for body and small, 1.2 for heading.

3. Spacing (base unit 8px)

	--space-1 8px tight: between related items
	--space-2 16px screen edge padding (phone)
	--space-3 24px standard: between sections
	--space-4 32px screen edge padding (desktop)

4. Other tokens

--radius buttons, inputs, cards	8px
--border-width inputs, cards, dividers	1px
--tap-target min height of every button / input	44px
--focus-ring offset 2px, on every control	2px solid #111111
--content-max desktop content width	1100px
--bp-desktop phone below, desktop above	768px



Setlog: Components, Responsive, Accessibility

Components pulled from the wireframes (02, Step C). Each one is built once and reused. Level and props listed under each sketch.

5. Reusable components



Button (atom)
props: variant, onClick, disabled, children
every screen



ExercisePicker + Select (molecule + atom)
props: exercises, value, onChange
Today, Progress



Tag (atom)
props: children
ExerciseRow, ExerciseSetGroup



NavBar + NavItem (organism + molecule)
props: NavBar: none; NavItem: to, label
every screen; bottom on phone, top on desktop




FormField + Input (molecule + atom)
props: label, id, type, value, onChange
Today, Exercises



IconButton (atom)
props: label (aria-label), onClick, children
SetRow, ExerciseSetGroup




SetRow (molecule)
props: setNumber, reps, weight, onDelete
Today, History

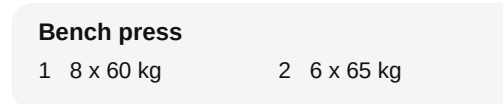

ExerciseSetGroup (organism)
props: exerciseName, sets, onDeleteSet
Today, History

6. Responsive plan (768px)

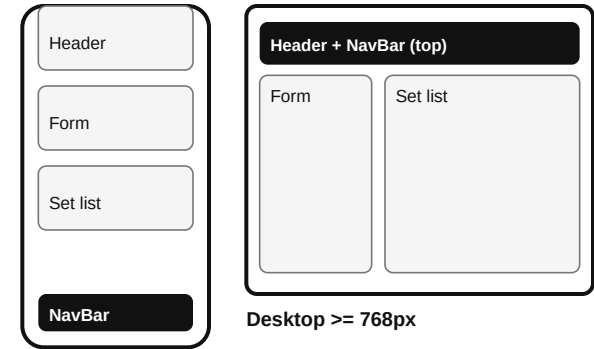

Phone < 768px

Phone: one column, NavBar fixed at bottom, edge padding 16px.
Desktop: two columns (or 2-card grid on History), NavBar on top, content max 1100px centered, edge padding 32px.
No horizontal scroll at 375px. Chart and tables fit width:100%.

7. Accessibility check

- ✓ All text pairs pass 4.5 : 1 (see page 1).
- ✓ Semantic tags: header, nav, main, button, form, ul.
- ✓ No meaningful images; chart has ProgressTable as text.
- ✓ Every input has a label (htmlFor + id via FormField).
- ✓ Tab reaches every control; 2px focus ring is visible.
- ✓ IconButton has aria-label (e.g. Delete set 1).
- ✓ Tap targets are at least 44px tall.

Screen-specific components use the same tokens: SetEntryForm, SetGroupList, SessionCard, SessionList, ProgressChart (black line, grey gridlines), ProgressTable, ExerciseForm, ExerciseList, ExerciseRow. The active tab is filled black; state is never shown by colour alone.