



Exercise: Implementing Triggers.

1. Download the provided resource file (*SalesOrderDetail.csv*) and import data from that file. Save the file as a .pbix.
2. Once saved, click *Publish*. Select the desired workspace.

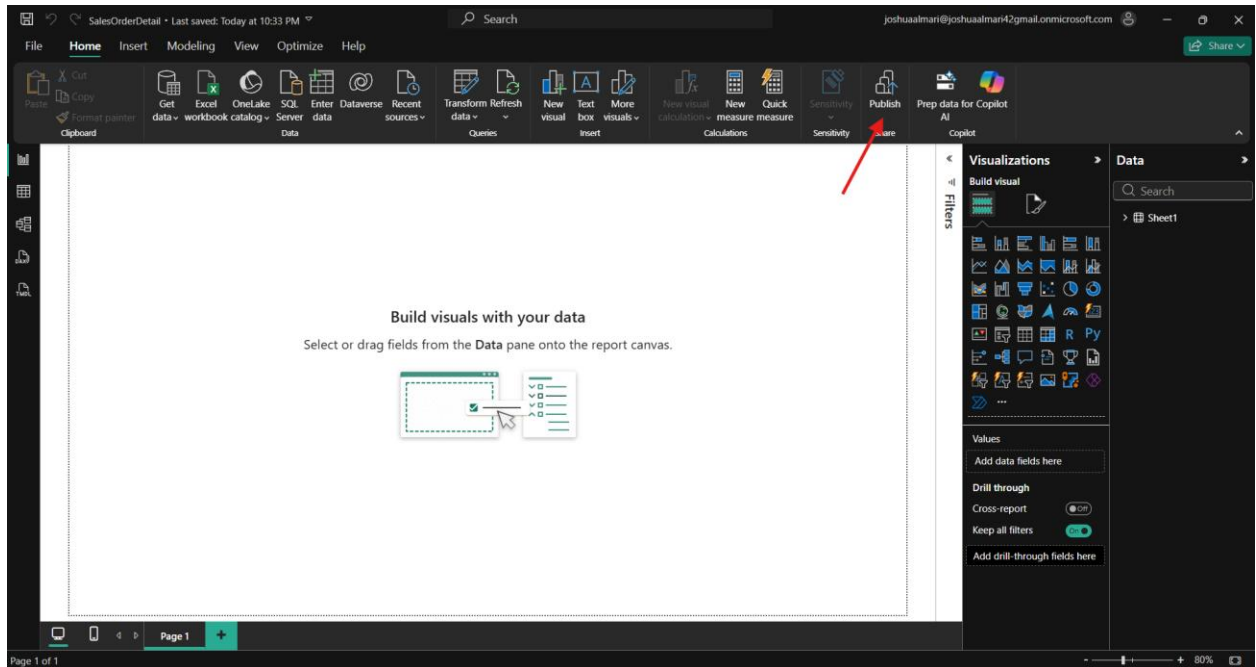


3. Go to Power BI Service, find the Semantic model.

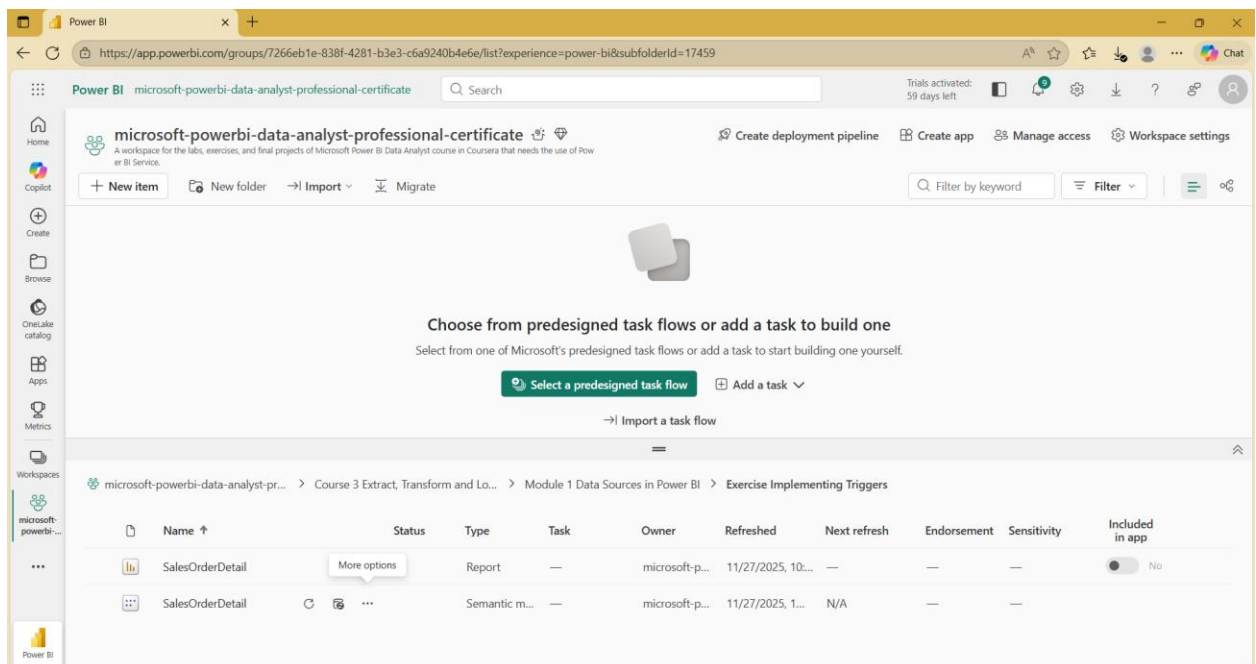

- a. Click More Options (...), then find *Settings*.

b. Click *Refresh*

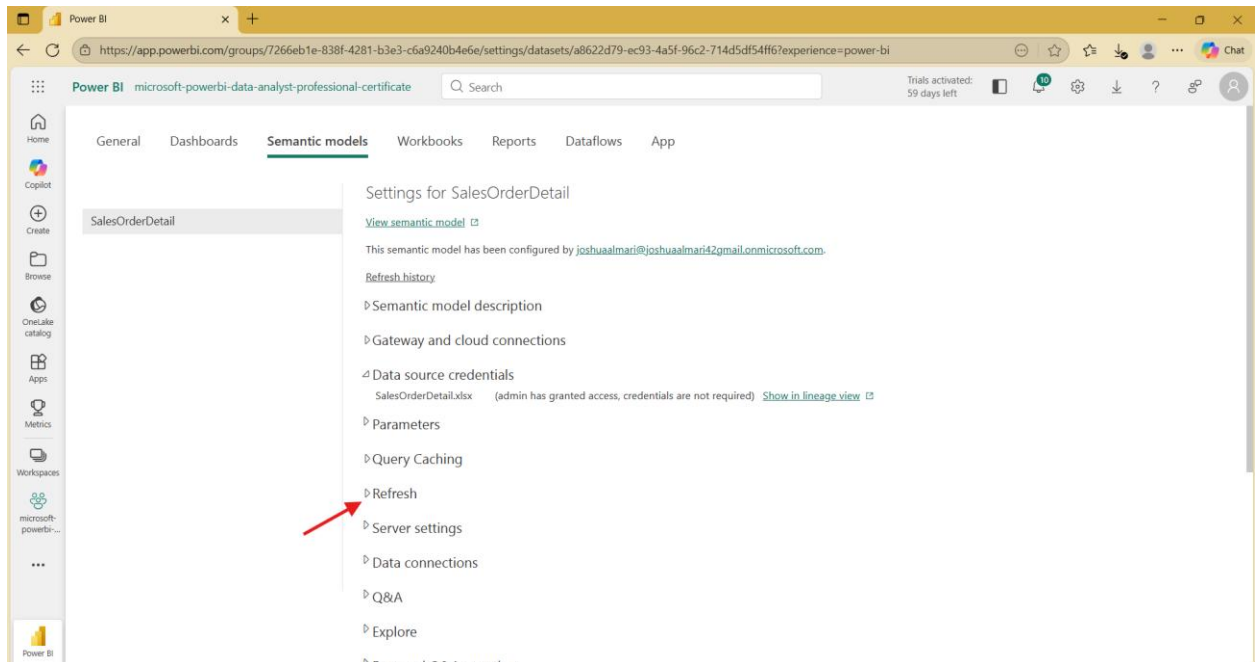

c. Turn it *On*, set the desired parameters. Click *Apply*.

Refresh

Time zone

① Time zone configuration is applied not only to determine the schedule refresh time but also to establish the current date and time for incremental refresh models during on-demand and API refreshes. [Learn more](#)

(UTC) Coordinated Universal Time

Configure a refresh schedule

Define a data refresh schedule to import data from the data source into the semantic model. [Learn more](#)

☒ On

Refresh frequency

Daily

Time

[Add another time](#)

Send refresh failure notifications to

☒ Semantic model owner

☐ These contacts:

Enter email addresses

Apply **Discard**

4. Successfully implemented a trigger -> Scheduled Refresh!