


## Pseudo Code / Written Response

Q1. In order to track clicks and open emails you could write a listener that responds when an email title gets clicked. When this happens you want the listener to call a function "openEmail" which would get the email contents and display it. It would look roughly like this:

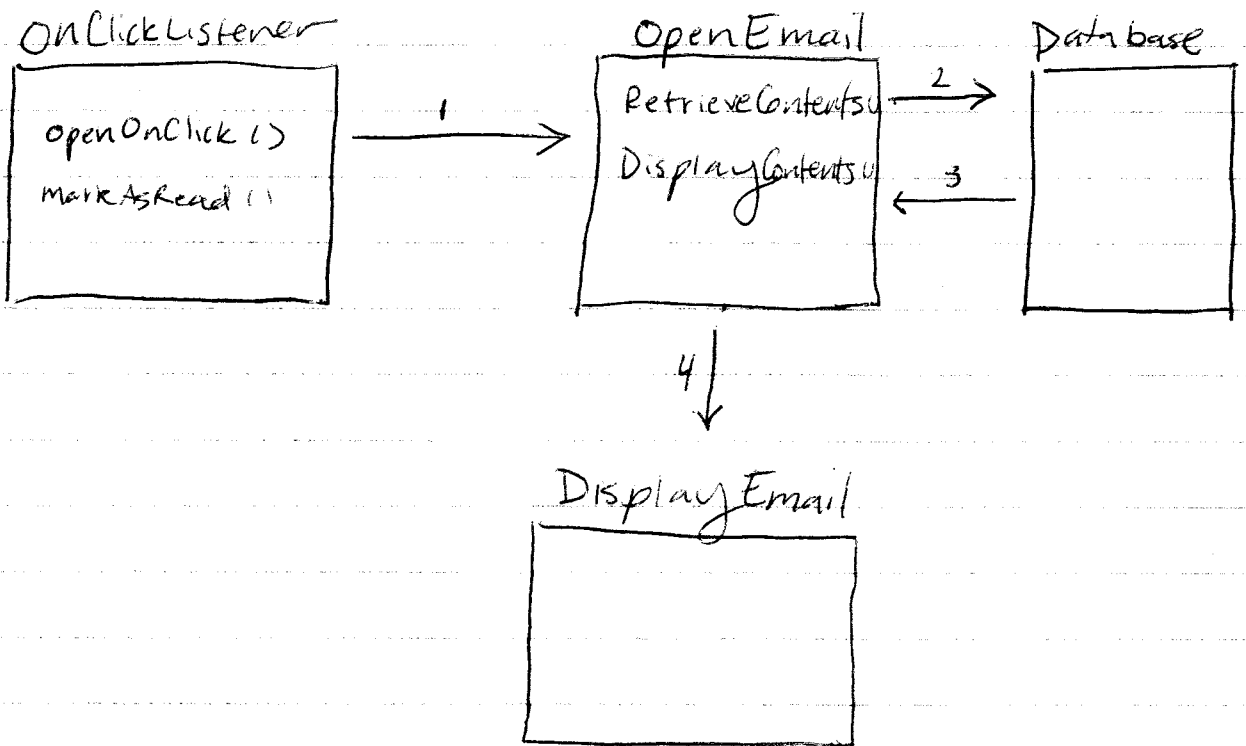

## Pseudo Code / Written Response

Q2. Some possible solutions include:

- ▷ Something similar to snap chat which displays the information briefly then deletes it. Could be done through a web portal or phone app.
- ▷ Setting up an automated system to call the client and relay the information w/o recording it.
- ▷ Opening a direct connection between our company and the client. Any input is sent to the client's terminal window. When the connection is broken both terminals get cleared & closed.

Questions for the client:

- What kind of information is being transferred?  
(All numbers? complicated information?)
- How quickly do they need the information?
- How long would they need the information available?
- Would they need to access the information on their own time?