

Patterns

Topics

- 1) How to best loop through some items?
- 2) How to best notify an object of a change?
- 3) How to best organize classes in an application?
- 4) How can design ideas be reused?

ood:

1.design patterns

2.design principles

3.design techniques:

ex: dependency injection - things we use to facilitate our design

Iterator

Accessing Items in a Collection

Java Iterator

```
List<String> data = // <snip>

Iterator<String> itr = data.iterator();
while (itr.hasNext()) {
    String word = itr.next();
    // <snip>
}
```

Direct Link List Code

```
List<String> data = // <snip>
LinkedList

Node n = data.head();
while (n != null) {
    String word = n.getData();
    // <snip>
    n = n.nextNode();
}
```

- What changes when switch to an ArrayList?
 - Using an iterator:..no change
 - Direct access:..change to index-iteration loop
- What changes when switch to an binary tree?
 - Using an iterator:..no change
 - Direct access:..change to recursive traversal


Iterator Idea

- Iterator Idea:
 - An object which allows iteration over items..
without exposing implementation details
 - If details are hidden..they can be changed without cost
 - Can have multiple iterators for a collection without them interfering.

```
int count = 0;
Iterator<String> itr1 = cars.iterator();
while (itr1.hasNext()) {
    String car1 = itr1.next();
    Iterator<String> itr2 = cars.iterator();
    while (itr2.hasNext()) {
        String car2 = itr2.next();
        if (car1.equals(car2)) {
            count++;
        }
    }
}
```

Pattern

- Software Design Pattern:
 - a description of a common software design problem and the essence of its solution
 - Allows discussion, implementation, and reuse of proven software designs.
- Gang of Four
 - A pioneering book on design patterns by 4 authors: Gamma, Helm, Johnson, Vlissides.

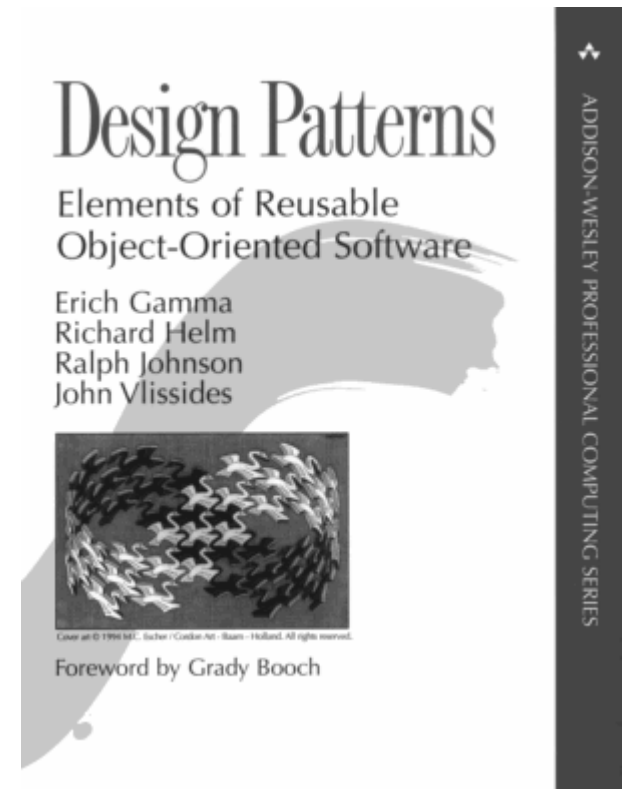


The Iterator Pattern

- Context
 - An aggregate object contains element objects
 - Clients need access to the element objects
 - The aggregate object should not expose its internal structure
 - Multiple clients may want independent access
- Solution
 - Iterator fetches one element at a time
 - Each iterator object. [tracks position of the next element](#)
 - Iterators use a common interface.


Iterator UML

- Client only depends on..
 - Iterator interface
- It gets a concrete iterator, but knows only its generic type.
- base
- Mapping pattern to CarManager example:

Iterator Pattern

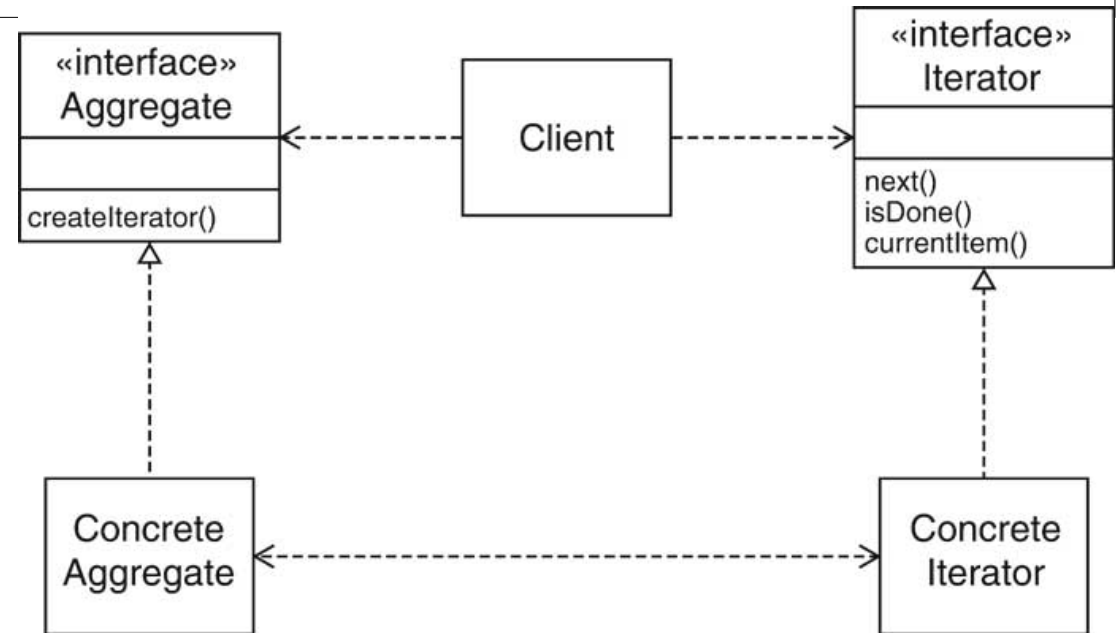

CarManager Classes

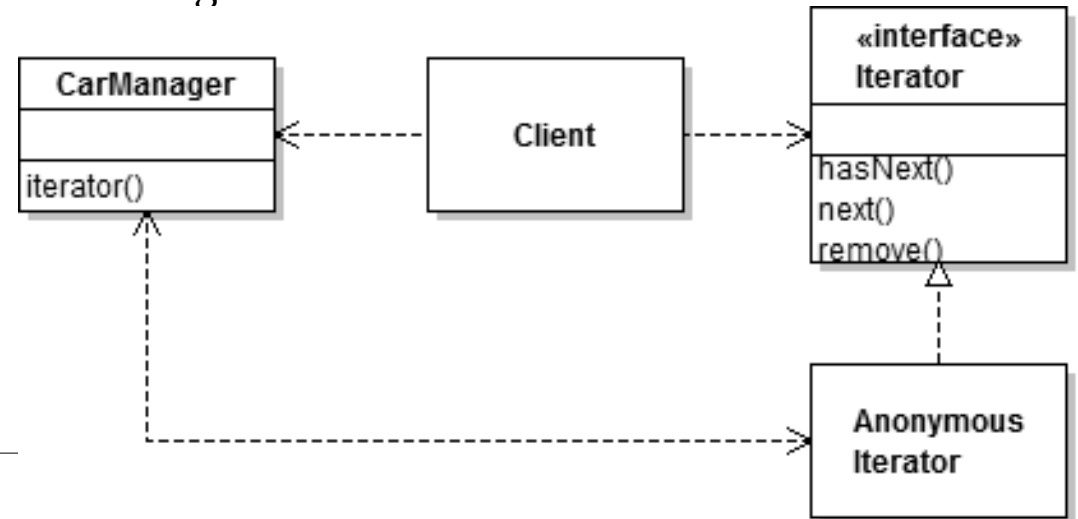

Design Pattern	CarManager Ex.
Concrete Iterator	Anon. Iterator
Concrete Aggregate	CarManager
Aggregate <<I>>	<i>nothing in this example.</i>
isDone()...	!hasNext()...



Observer

Observer pattern motivation

For
billionaires!

- Imagine you are writing an automatic day-planner:
 - It reads in the user's interests, plus information about the world, and suggest what they should do.
- Possible design idea:
 - You want to use different objects for cultural planning, sports planning, and sight-seeing.
 - Some objects bring in information about the world; your planning-objects use these info objects.
- Challenge:
 - All of these objects need to know the weather.
 - Your weather object gets updates now and then.
 - How do you tell.. [all the objects new data is available?](#)

Possible Idea

- Have the weather object call each info. object:

```
class Weather
{
    void newDataUpdate() {
        String weatherData = ...;
        culturePlanner.update(weatherData);
        sportsPlanner.update(weatherData);
        sightseeingPlanner.update(weatherData);
        // Change here EVERY time you get a new planner.
    }
}
```

- Bad because:
 - Weather object is...[tightly coupled to every planner!](#)
 - Every new planner you get, you'll have to change the weather object's code, recompile, and re-run.

The observer pattern

- Observer Pattern:


it allows objects to “register for updates” with another object at run-time

- Produces a one to many relationship:
 - one object observed (called the subject)
 - many objects observing (called the observers).
- Great because it loosely couples objects:
 - Object with something to report does not need a hard-coded list of who to tell; ...

it simply looks up its observer list

Weather Observer

- Weather has forecast and updates it periodically;
Client needs to know when new forecast is ready
- Client creates anonymous IWeatherChange obj
 - Client registers it with Weather as a listener for
call-back on forecast change
- Benefit is. decoupling: model knows nothing of UI

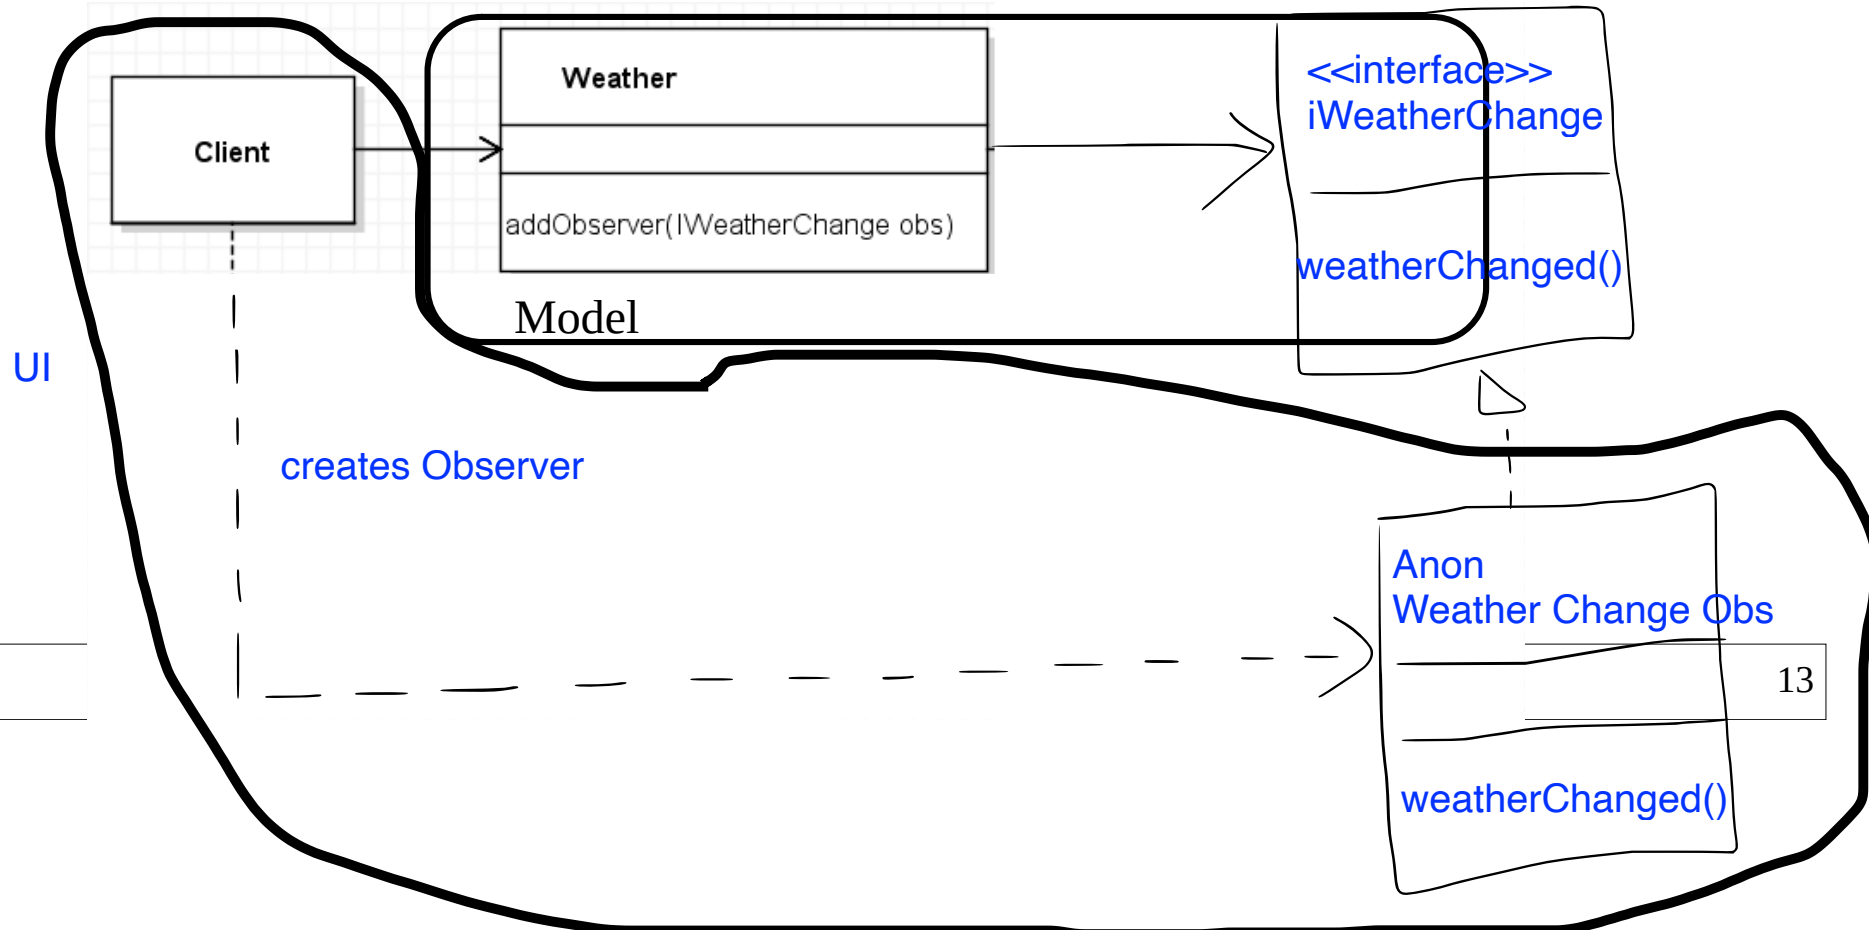

Observer Pattern


- Context
 - An object, called the subject, is source of events
 - One or more observer objects want to be notified when such an event occurs.
- Solution
 - Define an observer interface type.
All [concrete observers implement it](#)
 - Subject maintains a collection of observers.
 - Subject supplies methods for attaching and detaching observers.
 - Whenever an event occurs, the subject [notifies all observer](#)

Observer UML

- Subject object knows nothing about class observing it.

– ..

Observer Pattern

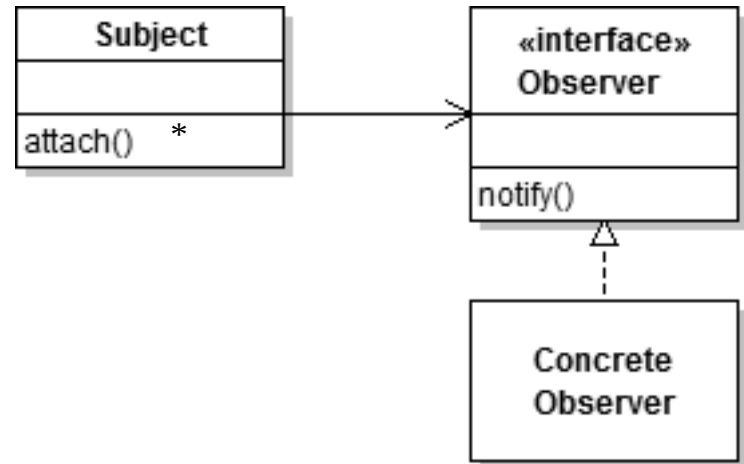

Design Pattern

Weather Ex.

Subject

Weather

`attach()`

`addObserver()`

Observer `<<|>>`


`IWeatherWatcher<<|>>`

`notify()`

`weatherChanged()`

Concrete Observer


Anon. Weather Change Obs

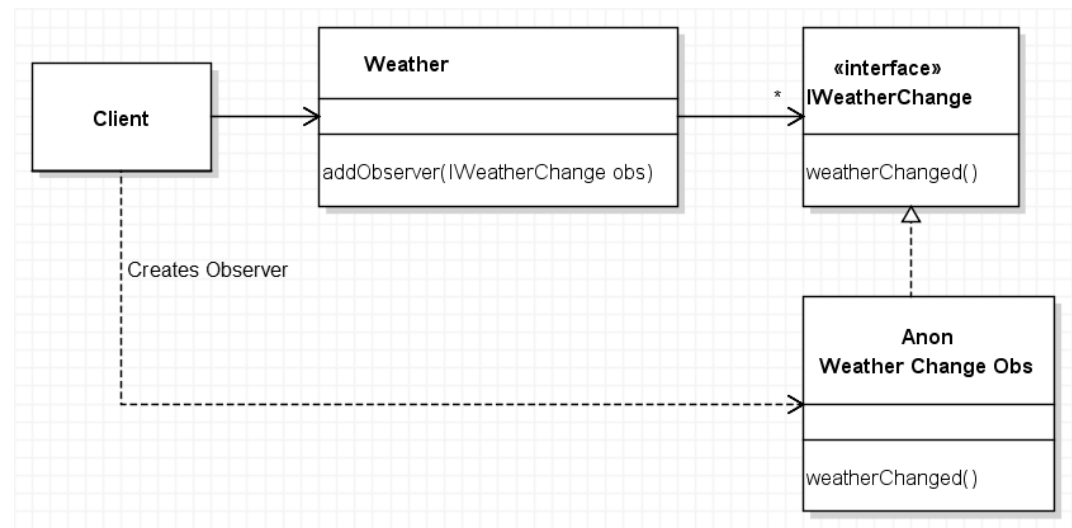

note: need to know how to convert code not using observer to used one

everything time model changes, observer needs to notify the appropriate ui?

Model View Controller Pattern and Facade Pattern

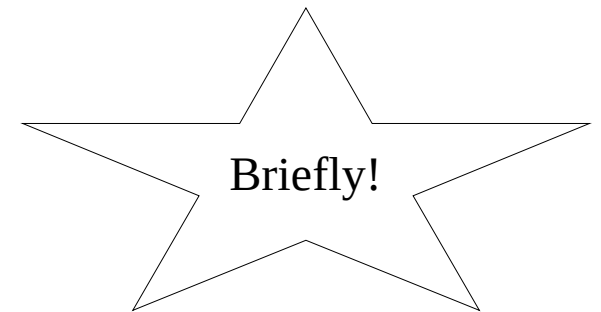

Terminology

- Model:
 - Not like a "model airplane":
it's the brains of your system.
- View:
 - Numerous views (parts of UI)
may register as observers
to a model.




MVC




- Clean design
Split business logic into..
- Model View Controller Pattern
MVC splits off 3 things:
 - Model: ..
 - Ex: HistogramData
 - View: ..
 - Ex: HistogramIcon, UI components
 - Controller: ..
 - Ex: ActionListeners for buttons.

Facade Pattern


- Separate your model from your UI!
 - What if the model is complicated?
UI gets.. to many classes in the model.
- Facade Pattern
 - Introduce a new class to the model to..

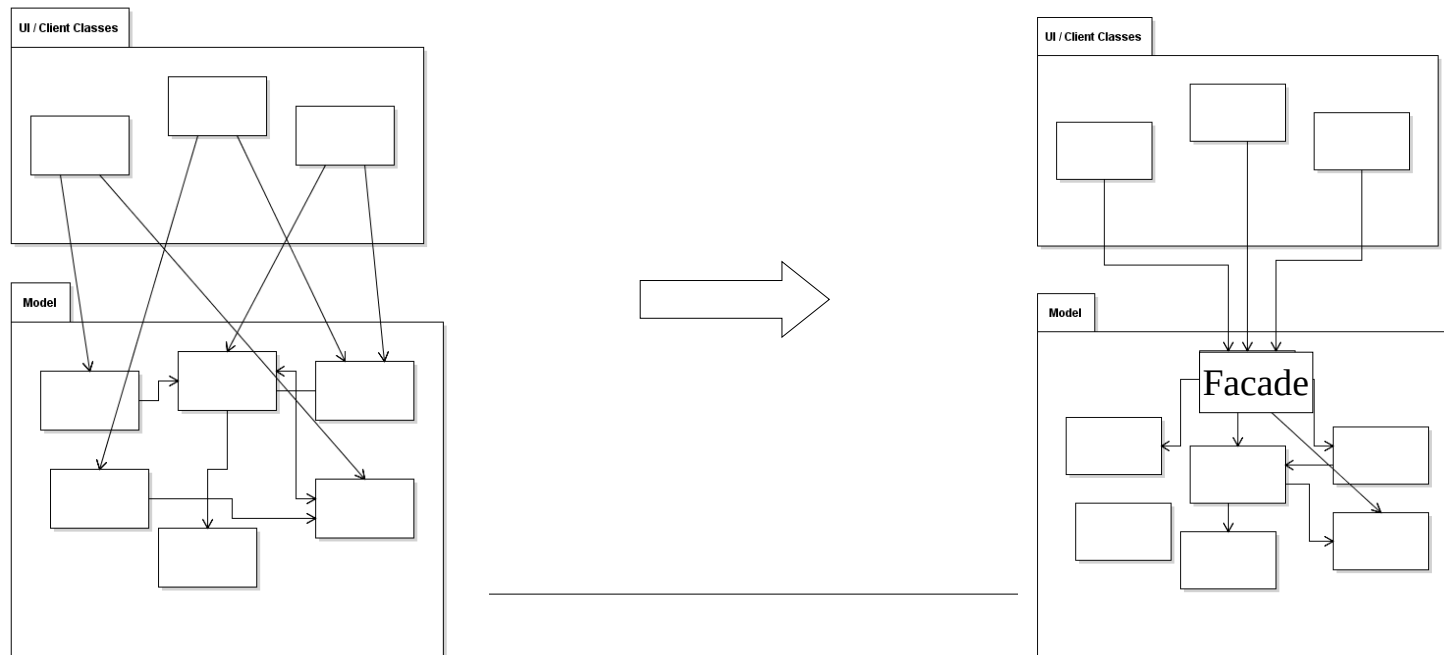

Facade Pattern Example: Music Player

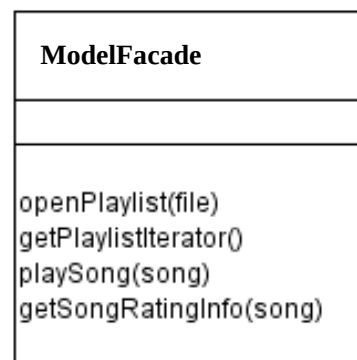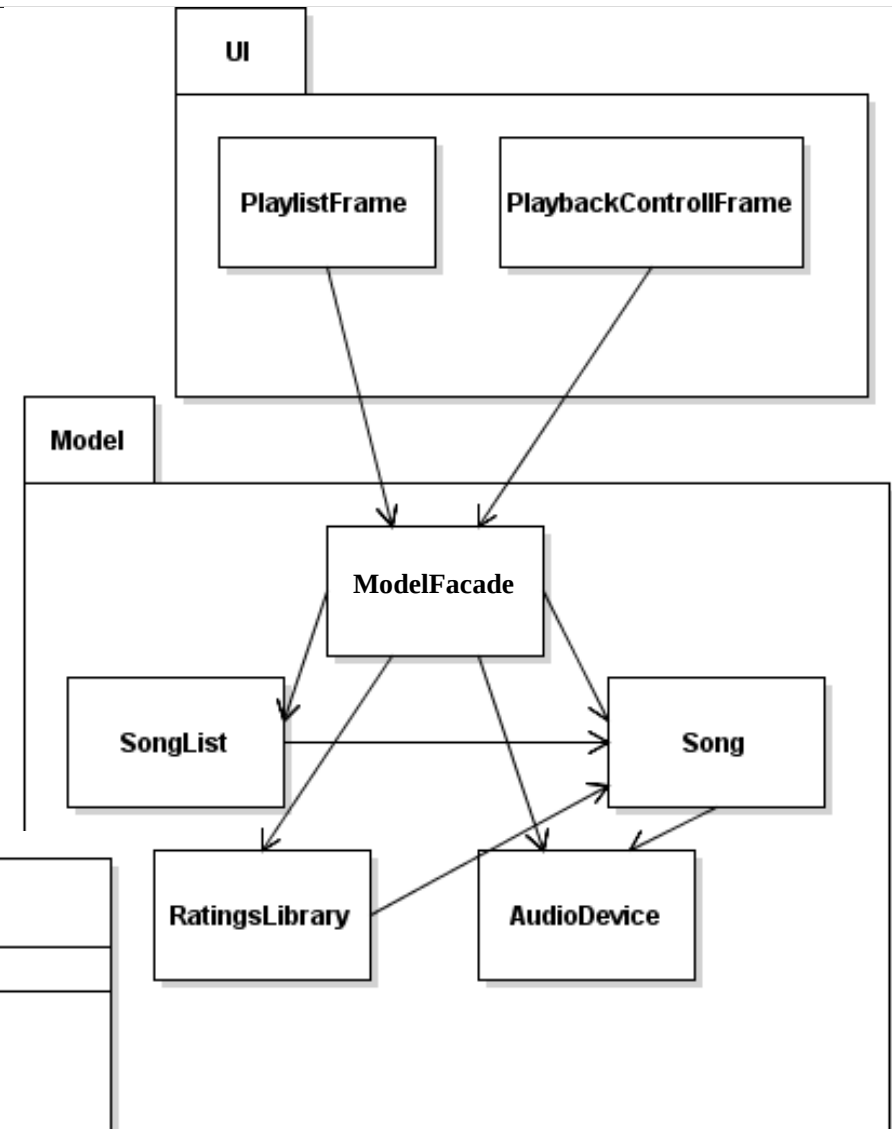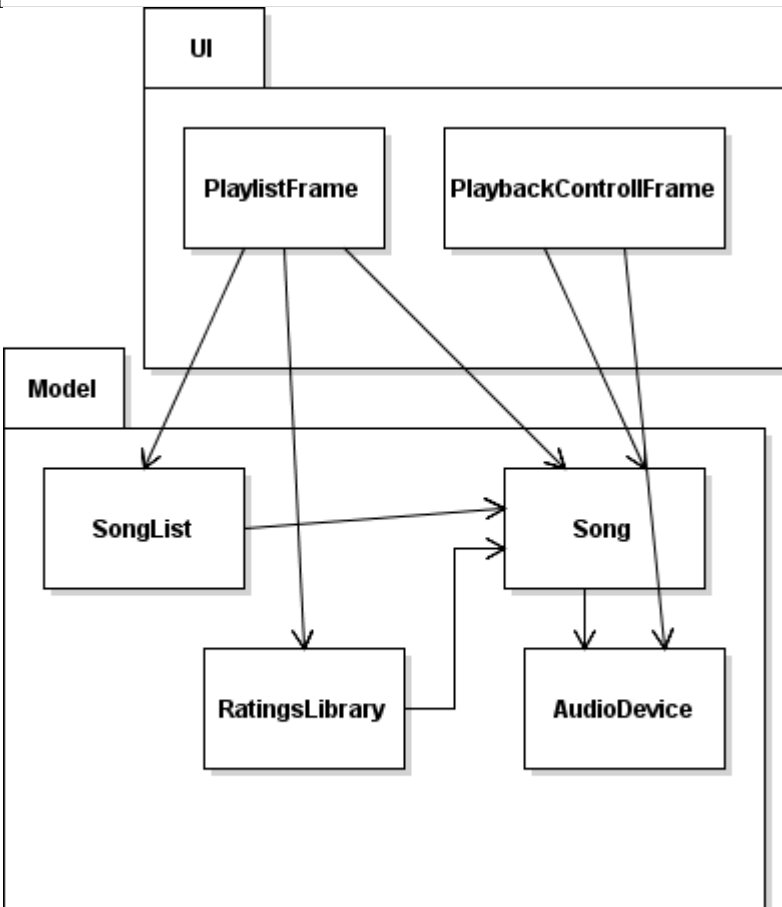

Recognizing Patterns

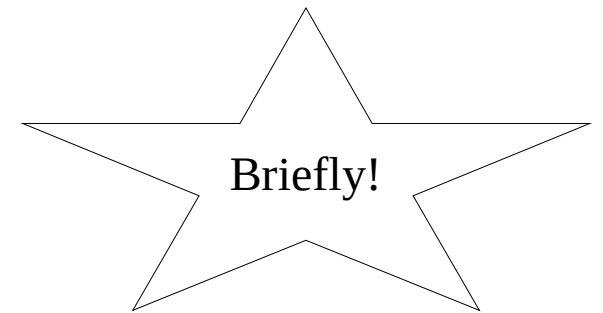

Applying Patterns

- Recognize a pattern by..
 - Iterator: cycle through a collection
 - Observer: register for events
 - Strategy: wrap part of an algorithm into a class
- Helps to remember examples
 - Pattern name a hint, but it's not always applicable.
- Ex: What strategy applies to..
 - Strategy?
 - Observer?
 - Iterator?

Summary

- Design patterns allow reuse of design ideas.
- Iterator: An object which abstracts iteration through items in a collection.
 - Decoupled: change collection without changing client code.
- Observer: Notify observing objects of a change without being coupled to those objects.
- MVC: Separate the model from the view.
 - Consider Facade Pattern to decouple UI from model complexity.
- Apply patterns based on patterns intention (not name or UML diagram).