Tipado o No Tipado

int, string, float, bool

Operaciones Numéricas: +, -, /, *, (**)? Potencia

Operaciones de Cadenas: concat, repetición, reemplazo, trim
sub

impresión

; ; EOI

Asignación

=

Bucles

while(cond) [bloque], do [bloque] while(cond)

Punto de Entrada

inicio del arch.

int a=3

decl: tipo lista_vars ";" | tipo lista_asig ";"

lista_vars: id | id, lista_vars

lista_asig: asig | asig, lista_asig

asig: id "=" expr

expr: expr_num | expr_str

expr_num: expr_num "+" termino

| expr_num "-" termino

| termino

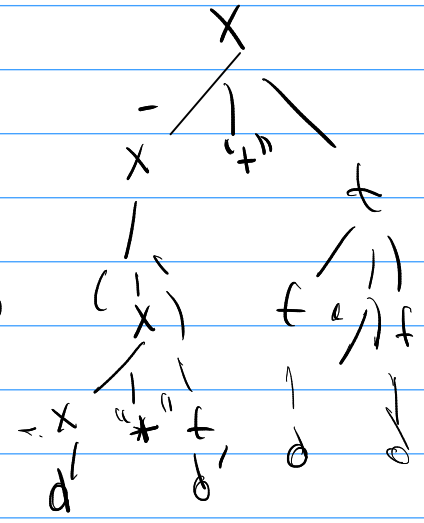

termino: termino "*" factor

| termino "/" factor

| factor

(5+2)+3 5

* str

factor: factor ^ expo | expo

expo: num | id | "(" expr_num ")"

expr_str: concat | rep | rpl | trim | sub

concat: concat "#+" str_lit | str_lit

rep: expr_num "#*" str_lit

rpl: "replace (" str_lit "," str_lit "," str_lit ")"

Src patrón sustición

rpl: "trim (" str_lit ")"

sub: "sub (" str_lit "," expr_num "," expr_num ")"

Src indice_inicio indice_fin

str_lit: "'" str "'" | id | "to_string(" expr_num ")"

impresion: "congri(" lista_args ")"

lista_args: lista_args "," expr | expr