

ANDROID STATIC ANALYSIS REPORT



₱ J2ME Loader (1.6.7-open)

File Name:	installer371.apk
Package Name:	ru.playsoftware.j2meloader
Scan Date:	May 30, 2022, 4:17 p.m.
App Security Score:	43/100 (MEDIUM RISK)
Grade:	

FINDINGS SEVERITY

ૠ HIGH	▲ MEDIUM	i INFO	✓ SECURE	® HOTSPOT
3	8	3	1	2

FILE INFORMATION

File Name: installer371.apk

Size: 5.15MB

MD5: 2750589140b6cbf11705537f2f2590cd

SHA1: c23ece48244d2802f82d498c6292b3c01683a279

SHA256: fa47c1d6395aff29a6e7b7d504074e5d8cc187e61244a27807ee2ba030635456

i APP INFORMATION

App Name: J2ME Loader

Package Name: ru.playsoftware.j2meloader

Main Activity: ru.playsoftware.j2meloader.MainActivity

Target SDK: 29 Min SDK: 14 Max SDK:

Android Version Name: 1.6.7-open

Android Version Code: 86



Activities: 9 Services: 3 Receivers: 0 Providers: 2

Exported Activities: 2 Exported Services: 0 Exported Receivers: 0 Exported Providers: 0



APK is signed v1 signature: True v2 signature: True v3 signature: False

Found 1 unique certificates

Subject: C=RU, L=Saint-Petersburg, CN=Nikita Shakarun

Signature Algorithm: rsassa_pkcs1v15 Valid From: 2018-02-03 16:37:33+00:00 Valid To: 2043-01-28 16:37:33+00:00

Issuer: C=RU, L=Saint-Petersburg, CN=Nikita Shakarun

Serial Number: 0xbe0063b Hash Algorithm: sha256

md5: beeae147543dda0e6f084fb2c8b3ec53

sha1: fa8aa497194847d5715baa62c6344d75a936eba6

sha256: de1bd54dfc5a8b856c4e82486dfb0c9857427b8f918f2a35d029d5bf569af79c

sha512: e0969b5632a6744964cb18b69b252ebfc9f5d3a7a3df28c277c04b33fdce056cf1976a70607a7c5967f11de67fdec37dcf81fe1f7167146b5c19c90b1d45bed8

PublicKey Algorithm: rsa

Bit Size: 2048

Fingerprint: 980729f7a99642b4eef7f7be13a89ae5a90575417744392c57fd0f0c5a8ae756

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate

TITLE	SEVERITY	DESCRIPTION
Application vulnerable to Janus Vulnerability	warning	Application is signed with v1 signature scheme, making it vulnerable to Janus vulnerability on Android 5.0-8.0, if signed only with v1 signature scheme. Applications running on Android 5.0-7.0 signed with v1, and v2/v3 scheme is also vulnerable.

⋮ APPLICATION PERMISSIONS

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.RECORD_AUDIO	dangerous	record audio	Allows application to access the audio record path.
android.permission.VIBRATE	normal	control vibrator	Allows the application to control the vibrator.
android.permission.WRITE_EXTERNAL_STORAGE	dangerous	read/modify/delete external storage contents	Allows an application to write to external storage.
android.permission.ACCESS_FINE_LOCATION	dangerous	fine (GPS) location	Access fine location sources, such as the Global Positioning System on the phone, where available. Malicious applications can use this to determine where you are and may consume additional battery power.
android.permission.INTERNET	normal	full Internet access	Allows an application to create network sockets.
android.permission.BLUETOOTH	normal	create Bluetooth connections	Allows applications to connect to paired bluetooth devices.
android.permission.BLUETOOTH_ADMIN	normal	bluetooth administration	Allows applications to discover and pair bluetooth devices.

PERMISSION	STATUS	INFO	DESCRIPTION
com.android.launcher.permission.lNSTALL_SHORTCUT	unknown	Unknown permission	Unknown permission from android reference

ক্লি APKID ANALYSIS

FILE	DETAILS		
	FINDINGS	DETAILS	
classes.dex	Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check	
	Anti Debug Code	Debug.isDebuggerConnected() check	
	Compiler	r8	

■ BROWSABLE ACTIVITIES

ACTIVITY	INTENT
----------	--------

ACTIVITY	INTENT
ru.playsoftware.j2meloader.MainActivity	Schemes: file://, content://, Hosts: *, Mime Types: application/java-archive, text/vnd.sun.j2me.app-descriptor, */*, Path Patterns: .*\\.jar, .**\\.jar, .**\\.jar, .**\\.jar, .*\\jar, .**\\.jaR, .**\\.JAR, .**\\.JAR, .**\\.JAD, .**\\.JAD, .**\\.JAD, .**\\.JAD, .**\\.JAD,

△ NETWORK SECURITY

SEVERITY DESCRIPTION	NO	SCOPE	SEVERITY	DESCRIPTION	
----------------------	----	-------	----------	-------------	--

Q MANIFEST ANALYSIS

NO	ISSUE	SEVERITY	DESCRIPTION
1	Clear text traffic is Enabled For App [android:usesCleartextTraffic=true]	high	The app intends to use cleartext network traffic, such as cleartext HTTP, FTP stacks, DownloadManager, and MediaPlayer. The default value for apps that target API level 27 or lower is "true". Apps that target API level 28 or higher default to "false". The key reason for avoiding cleartext traffic is the lack of confidentiality, authenticity, and protections against tampering; a network attacker can eavesdrop on transmitted data and also modify it without being detected.
2	Activity (ru.playsoftware.j2meloader.config.ConfigActivity) is not Protected. [android:exported=true]	high	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.

NO	ISSUE	SEVERITY	DESCRIPTION
3	Activity (ru.playsoftware.j2meloader.settings.SettingsActivity) is not Protected. An intent-filter exists.	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Activity is explicitly exported.
4	Launch Mode of Activity (org.acra.dialog.CrashReportDialog) is not standard.	high	An Activity should not be having the launch mode attribute set to "singleTask/singleInstance" as it becomes root Activity and it is possible for other applications to read the contents of the calling Intent. So it is required to use the "standard" launch mode attribute when sensitive information is included in an Intent.

</> CODE ANALYSIS

NO	ISSUE	SEVERITY	STANDARDS	FILES
				f/b/a/a/l/g.java javax/microedition/shell/MidletThre ad.java ru/playsoftware/j2meloader/crashes /AppCenterCollector.java org/acra/collector/PackageManager Collector.java d/h/l/a.java d/t/a/f/c.java j/a/u/h.java d/b/q/c1.java d/k/d/x.java ru/playsoftware/j2meloader/config/ ConfigActivity.java d/h/f/j.java d/h/f/e.java javax/microedition/rms/impl/Recor dStoreImpl.java d/h/l/b.java

				j/a/o/e.java
NO	ISSUE	SEVERITY	STANDARDS	卢作/伊 尔.java
				org/acra/ACRA.java
				org/acra/collector/LogCatCollector.ja
				va
				d/b/q/g1.java
				k/a/a/l/d.java
				d/k/d/v.java
				d/h/k/a.java
				d/b/k/n.java
				com/arthenica/mobileffmpeg/Config
				.java
				j/a/u/j.java
				j/a/u/e.java
				j/a/s/j.java
				d/f/b/b.java
				javax/microedition/lcdui/event/Canv
				asEvent.java
				com/arthenica/mobileffmpeg/FFpro
				be.java
				d/h/j/b.java
				org/acra/collector/SimpleValuesColl
				ector.java
				j/a/s/d.java
				d/b/k/k.java
				javax/microedition/lcdui/pointer/Vir
				tualKeyboard.java
				org/acra/attachment/AcraContentPr
				ovider.java
				d/u/x.java
				f/a/c/a/a.java
				d/b/p/f.java
				javax/microedition/media/InternalD
				ataSource.java
				org/acra/collector/DisplayManagerC
				ollector.java
				d/h/h/b.java
				org/microemu/cldc/btl2cap/Connect
				ion.java
				javax/microedition/rms/impl/Androi
				-
				dRecordStoreManager.java
]				d/b/q/a0.java

NO	ISSUE	SEVERITY	STANDARDS	k/a/a/h/a.java Felaso/a/f.java d/i/b/e.java
1	The App logs information. Sensitive information should never be logged.	info	CWE: CWE-532: Insertion of Sensitive Information into Log File OWASP MASVS: MSTG-STORAGE-3	d/j/b/e-java d/k/d/a.java j/a/q/a.java k/a/a/l/c.java d/b/q/v0.java d/h/f/c.java d/h/d/c.java d/h/d/b.java org/microemu/microedition/io/Con nectorImpl.java d/b/q/k0.java f/a/e/u.java d/b/q/q0.java j/a/k/a.java d/h/ff.java org/acra/interaction/DialogInteractio n.java d/u/i0.java org/acra/collector/ConfigurationColl ector.java j/a/r/b.java d/b/p/i/g.java j/a/r/b.java d/b/p/i/g.java javax/microedition/lcdui/Canvas.jav a j/a/s/e.java j/a/i/d.java org/acra/sender/LegacySenderServic e.java d/h/l/r.java com/arthenica/mobileffmpeg/Media InformationParser.java com/arthenica/mobileffmpeg/Came raSupport.java d/k/d/p.java i/a/e/c.java i/a/e/c.java i/a/e/c.java d/k/d/p.java

NO	ISSUE	SEVERITY	STANDARDS	d/n/b/c.java f/b/a/a/v/g.java
				f/b/a/a/d0/b.java
				j/a/h/f.java
				d/b/q/d1.java
				d/r/f.java
				j/e/a/g/a/d.java
				javax/microedition/m3g/Object3D.ja
				va
				f/a/b/b/b/b.java
				d/h/l/n.java
				d/v/a/a/g.java
				e/a/a/a/p.java
				d/h/f/l/d.java
				d/h/f/g.java
				j/a/i/c.java
				d/b/q/w.java
				com/nokia/mid/ui/DirectGraphicsIm
				p.java
				javax/microedition/shell/MicroLoad
				er.java
				d/b/q/u0.java
				javax/microedition/lcdui/event/Even
				t.java
				d/f/b/a.java
				d/r/m.java
				f/b/a/a/a0/c.java
				javax/microedition/shell/AppClassLo
				ader.java
				d/k/d/e.java
				d/h/f/d.java
				org/microemu/cldc/btspp/Connectio
				n.java
				org/acra/collector/MemoryInfoColle
				ctor.java
				f/b/a/a/c0/b.java
				j/a/n/b.java
				d/i/a/b.java
				javax/microedition/lcdui/graphics/S
				haderProgram.java
				d/k/d/r.java

NO	ISSUE	SEVERITY	STANDARDS	d/b/k/x.java 戶tg/gS ra/collector/SettingsCollector.j ava
				org/acra/collector/DropBoxCollector .java d/b/p/i/d.java d/b/q/m0.java k/a/a/g/e0.java j/a/e/b.java j/a/h/g.java f/b/b/c0/v.java f/b/a/a/f0/g.java d/r/g.java d/p/i.java c/a/a/a.java j/e/a/g/a/e.java d/b/l/a/a.java
2	App uses SQLite Database and execute raw SQL query. Untrusted user input in raw SQL queries can cause SQL Injection. Also sensitive information should be encrypted and written to the database.	warning	CWE: CWE-89: Improper Neutralization of Special Elements used in an SQL Command ('SQL Injection') OWASP Top 10: M7: Client Code Quality	d/t/a/f/c.java d/r/f.java
3	Files may contain hardcoded sensitive information like usernames, passwords, keys etc.	warning	CWE: CWE-312: Cleartext Storage of Sensitive Information OWASP Top 10: M9: Reverse Engineering OWASP MASVS: MSTG-STORAGE-14	javax/microedition/media/control/M etaDataControl.java
4	SHA-1 is a weak hash known to have hash collisions.	warning	CWE: CWE-327: Use of a Broken or Risky Cryptographic Algorithm OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-4	f/a/b/c/d/o.java ru/playsoftware/j2meloader/Emulat orApplication.java f/b/b/c0/v.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
5	App can write to App Directory. Sensitive Information should be encrypted.	info	CWE: CWE-276: Incorrect Default Permissions OWASP MASVS: MSTG-STORAGE-14	javax/microedition/rms/RecordStore .java
6	App creates temp file. Sensitive information should never be written into a temp file.	warning	CWE: CWE-276: Incorrect Default Permissions OWASP Top 10: M2: Insecure Data Storage OWASP MASVS: MSTG-STORAGE-2	javax/microedition/media/InternalD ataSource.java javax/microedition/media/RecordPl ayer.java d/r/m.java
7	App can read/write to External Storage. Any App can read data written to External Storage.	warning	CWE: CWE-276: Incorrect Default Permissions OWASP Top 10: M2: Insecure Data Storage OWASP MASVS: MSTG-STORAGE-2	k/a/a/g/w.java d/h/e/a.java javax/microedition/shell/MicroLoad er.java k/a/a/i/a.java org/acra/file/Directory.java
8	This App copies data to clipboard. Sensitive data should not be copied to clipboard as other applications can access it.	info	OWASP MASVS: MSTG-STORAGE-10	j/e/a/b.java

SHARED LIBRARY BINARY ANALYSIS

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED	
----	---------------	----	-----------------	-------	-------	---------	---------	---------------------	--

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
1	lib/armeabi-v7a/libavutil.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
2	lib/armeabi-v7a/libavfilter.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
3	lib/armeabi-v7a/libjavam3g.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
4	lib/armeabi-v7a/libmidi.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
5	lib/armeabi-v7a/libswscale.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
6	lib/armeabi-v7a/libmobileffmpeg.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
7	lib/armeabi-v7a/libcpufeatures.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
8	lib/armeabi-v7a/libswresample.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
9	lib/armeabi-v7a/libavdevice.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
10	lib/armeabi- v7a/libmobileffmpeg_abidetect.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
11	lib/armeabi-v7a/libavcodec.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
12	lib/armeabi-v7a/libavformat.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
13	lib/x86/libavutil.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
14	lib/x86/libavfilter.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
15	lib/x86/libjavam3g.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
16	lib/x86/libmidi.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
17	lib/x86/libswscale.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
18	lib/x86/libmobileffmpeg.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
19	lib/x86/libcpufeatures.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
20	lib/x86/libswresample.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
21	lib/x86/libavdevice.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
22	lib/x86/libmobileffmpeg_abidetect.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
23	lib/x86/libavcodec.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
24	lib/x86/libavformat.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

■ NIAP ANALYSIS v1.3

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
1	FCS_RBG_EXT.1.1	Security Functional Requirements	Random Bit Generation Services	The application invoke platform-provided DRBG functionality for its cryptographic operations.
2	FCS_STO_EXT.1.1	Security Functional Requirements	Storage of Credentials	The application does not store any credentials to non-volatile memory.
3	FCS_CKM_EXT.1.1	Security Functional Requirements	Cryptographic Key Generation Services	The application generate no asymmetric cryptographic keys.
4	FDP_DEC_EXT.1.1	Security Functional Requirements	Access to Platform Resources	The application has access to ['bluetooth', 'location', 'microphone', 'network connectivity'].
5	FDP_DEC_EXT.1.2	Security Functional Requirements	Access to Platform Resources	The application has access to no sensitive information repositories.
6	FDP_NET_EXT.1.1	Security Functional Requirements	Network Communications	The application has user/application initiated network communications.
7	FDP_DAR_EXT.1.1	Security Functional Requirements	Encryption Of Sensitive Application Data	The application does not encrypt files in non-volatile memory.
8	FMT_MEC_EXT.1.1	Security Functional Requirements	Supported Configuration Mechanism	The application invoke the mechanisms recommended by the platform vendor for storing and setting configuration options.
9	FTP_DIT_EXT.1.1	Security Functional Requirements	Protection of Data in Transit	The application does encrypt some transmitted data with HTTPS/TLS/SSH between itself and another trusted IT product.

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
10	FCS_RBG_EXT.2.1,FCS_RBG_EXT.2.2	Selection-Based Security Functional Requirements	Random Bit Generation from Application	The application perform all deterministic random bit generation (DRBG) services in accordance with NIST Special Publication 800-90A using Hash_DRBG. The deterministic RBG is seeded by an entropy source that accumulates entropy from a platform-based DRBG and a software-based noise source, with a minimum of 256 bits of entropy at least equal to the greatest security strength (according to NIST SP 800-57) of the keys and hashes that it will generate.
11	FCS_COP.1.1(2)	Selection-Based Security Functional Requirements	Cryptographic Operation - Hashing	The application perform cryptographic hashing services in accordance with a specified cryptographic algorithm SHA-1/SHA-256/SHA-384/SHA-512 and message digest sizes 160/256/384/512 bits.
12	FCS_COP.1.1(3)	Selection-Based Security Functional Requirements	Cryptographic Operation - Signing	The application perform cryptographic signature services (generation and verification) in accordance with a specified cryptographic algorithm RSA schemes using cryptographic key sizes of 2048-bit or greater.
13	FCS_HTTPS_EXT.1.1	Selection-Based Security Functional Requirements	HTTPS Protocol	The application implement the HTTPS protocol that complies with RFC 2818.
14	FCS_HTTPS_EXT.1.2	Selection-Based Security Functional Requirements	HTTPS Protocol	The application implement HTTPS using TLS.
15	FCS_HTTPS_EXT.1.3	Selection-Based Security Functional Requirements	HTTPS Protocol	The application notify the user and not establish the connection or request application authorization to establish the connection if the peer certificate is deemed invalid.
16	FIA_X509_EXT.1.1	Selection-Based Security Functional Requirements	X.509 Certificate Validation	The application invoked platform-provided functionality to validate certificates in accordance with the following rules: ['The certificate path must terminate with a trusted CA certificate'].

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
17	FIA_X509_EXT.2.1	Selection-Based Security Functional Requirements	X.509 Certificate Authentication	The application use X.509v3 certificates as defined by RFC 5280 to support authentication for HTTPS , TLS.

Q DOMAIN MALWARE CHECK

DOMAIN	STATUS	GEOLOCATION
android.googlesource.com	ok	IP: 142.250.27.82 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
api.flattr.com	ok	IP: 104.26.10.251 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

DOMAIN	STATUS	GEOLOCATION
crowdin.com	ok	IP: 44.199.129.167 Country: United States of America Region: Virginia City: Ashburn Latitude: 39.043720 Longitude: -77.487488 View: Google Map
www.ffmpeg.org	ok	IP: 79.124.17.100 Country: Bulgaria Region: Sofia (stolitsa) City: Sofia Latitude: 42.697510 Longitude: 23.324150 View: Google Map
github.com	ok	IP: 140.82.121.4 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
upload.ffmpeg.org	ok	IP: 213.36.253.119 Country: France Region: Ile-de-France City: Paris Latitude: 48.853409 Longitude: 2.348800 View: Google Map

DOMAIN	STATUS	GEOLOCATION
www.paypal.com	ok	IP: 23.0.250.159 Country: Netherlands Region: Noord-Holland City: Amsterdam Latitude: 52.374031 Longitude: 4.889690 View: Google Map
in.appcenter.ms	ok	IP: 40.70.161.7 Country: United States of America Region: Virginia City: Boydton Latitude: 36.667641 Longitude: -78.387497 View: Google Map
schemas.android.com	ok	No Geolocation information available.
4pda.ru	ok	IP: 172.67.183.145 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
www.w3.org	ok	IP: 128.30.52.100 Country: United States of America Region: Massachusetts City: Cambridge Latitude: 42.365078 Longitude: -71.104523 View: Google Map

DOMAIN	STATUS	GEOLOCATION
forum.xda-developers.com	ok	IP: 104.18.19.88 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

EMAILS


EMAIL	FILE
nikita36078@mail.ru	ru/playsoftware/j2meloader/donations/DonationsActivity.java
j2me.loader@mail.ru	Android String Resource
ffmpeg-devel@ffmpeg.org	lib/armeabi-v7a/libmobileffmpeg.so
ffmpeg-devel@ffmpeg.org	lib/x86/libmobileffmpeg.so


HARDCODED SECRETS


POSSIBLE SECRETS

"PREF_VK_FIRE_KEY" : "Fire:"

POSSIBLE SECRETS
"donationsbitcoin" : "Bitcoin"
"virtual_key_0" : "0"
"virtual_key_1" : "1"
"virtual_key_2" : "2"
"virtual_key_3" : "3"
"virtual_key_4" : "4"
"virtual_key_5" : "5"
"virtual_key_6" : "6"
"virtual_key_7" : "7"
"virtual_key_8" : "8"
"virtual_key_9" : "9"
"virtual_key_c" : "C"
"virtual_key_d" : "D"
"virtual_key_down" : "↓"
"virtual_key_f" : "F"
"virtual_key_left" : "←"

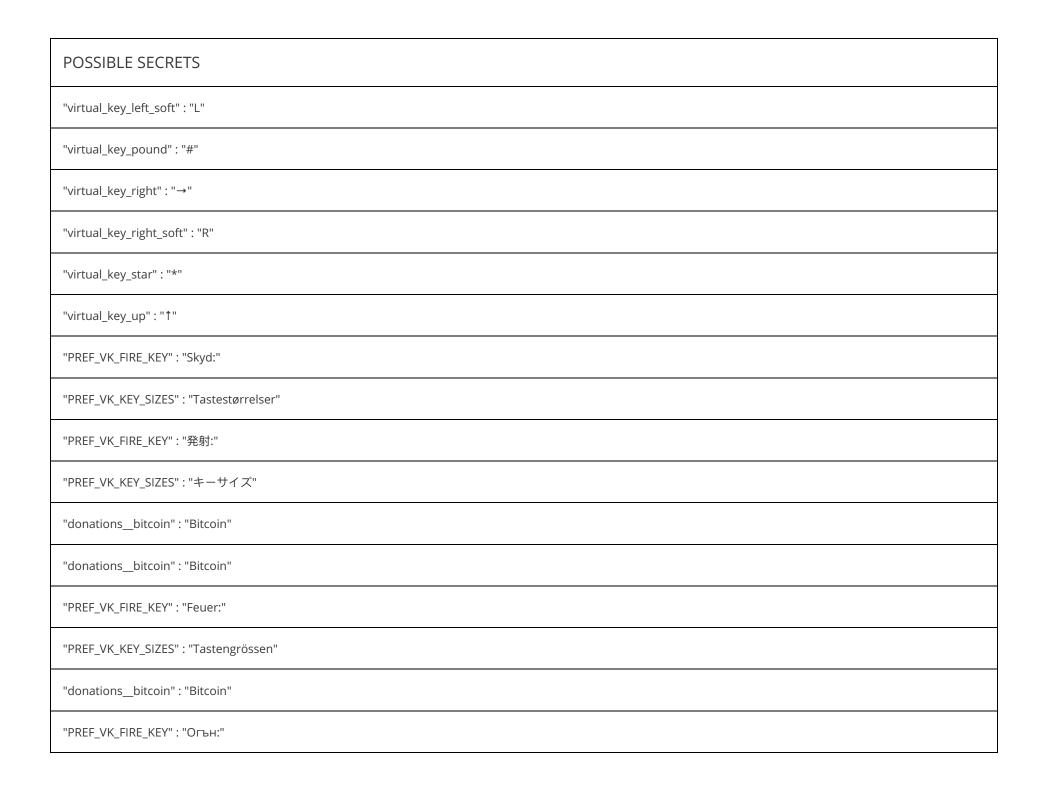

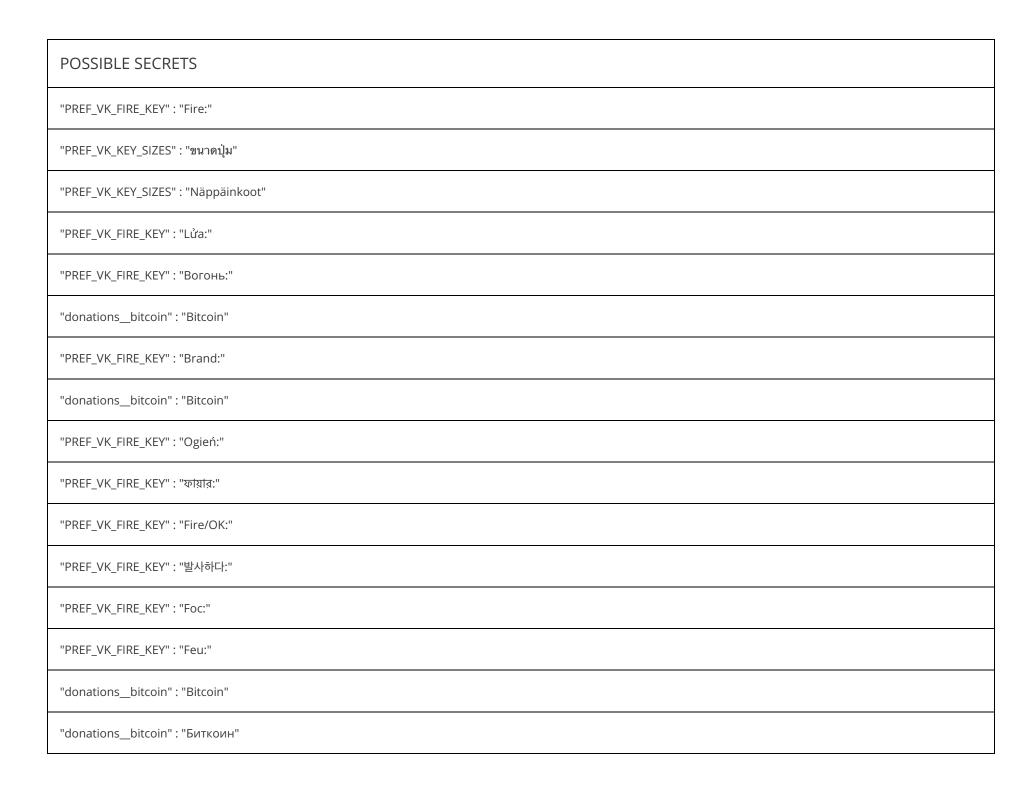

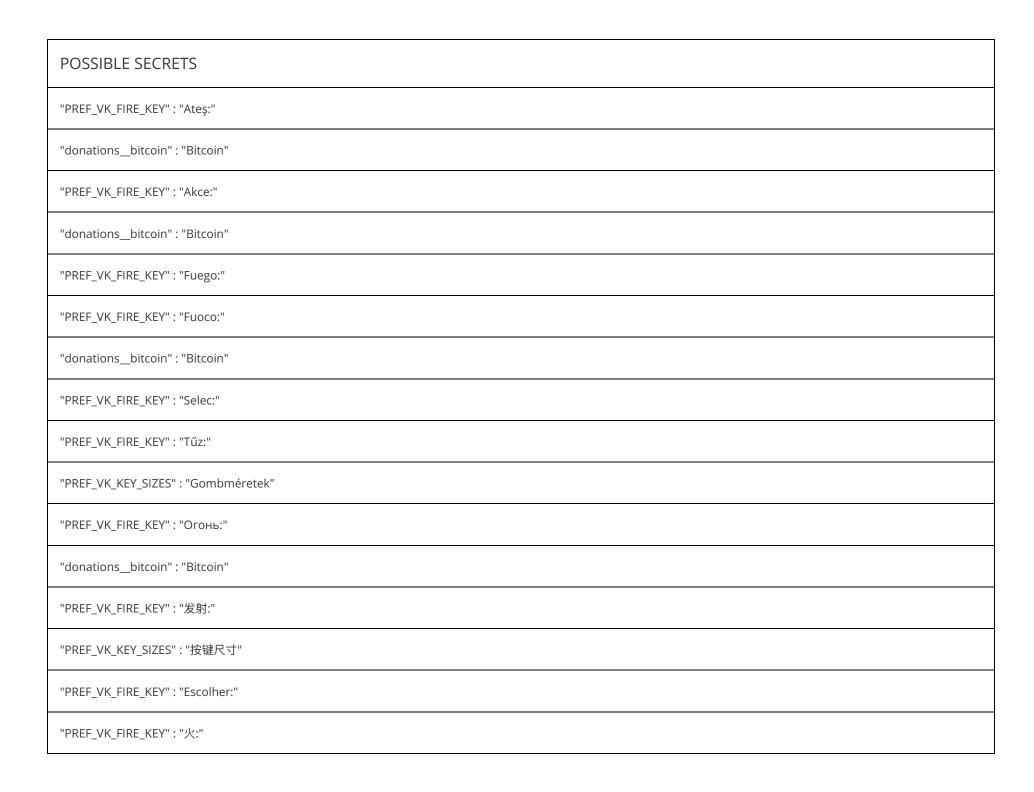

POSSIBLE SECRETS	
"PREF_VK_KEY_SIZES": "按鍵呎吋"	
"donations_bitcoin" : "Bitcoin"	

Report Generated by - MobSF v3.5.2 Beta

Mobile Security Framework (MobSF) is an automated, all-in-one mobile application (Android/iOS/Windows) pen-testing, malware analysis and security assessment framework capable of performing static and dynamic analysis.

@ 2022 Mobile Security Framework - MobSF | <u>Ajin Abraham</u> | <u>OpenSecurity.</u>