

ANDROID STATIC ANALYSIS REPORT



AdAway (5.11.0)

File Name:	web2.apk
Package Name:	org.adaway
Scan Date:	May 23, 2022, 5:01 p.m.
App Security Score:	49/100 (MEDIUM RISK)
Grade:	

FINDINGS SEVERITY

派 HIGH	▲ MEDIUM	i INFO	✓ SECURE	≪ HOTSPOT
3	13	1	2	2

FILE INFORMATION

File Name: web2.apk Size: 14.52MB

MD5: 5d56173923c2637b2b8ab48433c8bf81

SHA1: 4f358bb5702b0418243384129ea4334892923496

SHA256: fd3d031937bd624e5f9d5834bcaa91792feb9cd21e012827d6408f5eae9f401a

i APP INFORMATION

App Name: AdAway

Package Name: org.adaway

Main Activity: org.adaway.ui.home.HomeActivity

Target SDK: 31 Min SDK: 26 Max SDK:

Android Version Name: 5.11.0
Android Version Code: 51100

B APP COMPONENTS

Activities: 11 Services: 6 Receivers: 11 Providers: 2

Exported Activities: O
Exported Services: 3
Exported Receivers: 4
Exported Providers: O

***** CERTIFICATE INFORMATION

APK is signed v1 signature: True v2 signature: True v3 signature: True

Found 1 unique certificates

Subject: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid

Signature Algorithm: rsassa_pkcs1v15 Valid From: 2011-10-17 15:37:10+00:00 Valid To: 2039-03-04 15:37:10+00:00

Issuer: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid

Serial Number: 0x4e9c4ba6 Hash Algorithm: sha1

md5: 24f57c080f780784bfcd913ca7fbab8d

sha1: 36519fb606dee5e0268dd47d5ca0151e4c9cefdb

sha256: 42203f1ac857426d1496e971db96fbe1f88c25c9e1f895a5c98d703891292277

PublicKey Algorithm: rsa

Bit Size: 2048

Fingerprint: 02bf8b3ceb1eb59c37dace62c9bc1edaf103ac0ab73a97e76e22bf7968e069af

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate
Application vulnerable to Janus Vulnerability	warning	Application is signed with v1 signature scheme, making it vulnerable to Janus vulnerability on Android 5.0-8.0, if signed only with v1 signature scheme. Applications running on Android 5.0-7.0 signed with v1, and v2/v3 scheme is also vulnerable.
Certificate algorithm might be vulnerable to hash collision	warning	Application is signed with SHA1withRSA. SHA1 hash algorithm is known to have collision issues. The manifest file indicates SHA256withRSA is in use.

⋮ APPLICATION PERMISSIONS

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.INTERNET	normal	full Internet access	Allows an application to create network sockets.
android.permission.ACCESS_NETWORK_STATE	normal	view network status	Allows an application to view the status of all networks.
android.permission.RECEIVE_BOOT_COMPLETED	normal	automatically start at boot	Allows an application to start itself as soon as the system has finished booting. This can make it take longer to start the phone and allow the application to slow down the overall phone by always running.
android.permission.FOREGROUND_SERVICE	normal		Allows a regular application to use Service.startForeground.

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.REQUEST_INSTALL_PACKAGES	dangerous	Allows an application to request installing packages.	Malicious applications can use this to try and trick users into installing additional malicious packages.
android.permission.QUERY_ALL_PACKAGES	normal		Allows query of any normal app on the device, regardless of manifest declarations.
android.permission.WAKE_LOCK	normal	prevent phone from sleeping	Allows an application to prevent the phone from going to sleep.

M APKID ANALYSIS

FILE	DETAILS

FILE	DETAILS			
	FINDINGS	DETAILS		
classes.dex	Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.HARDWARE check Build.TAGS check possible VM check		
	Anti Debug Code	Debug.isDebuggerConnected() check		
	Compiler	r8 without marker (suspicious)		

△ NETWORK SECURITY

NO	SCOPE	SEVERITY	DESCRIPTION
1	localhost	high	Domain config is configured to trust user installed certificates.

Q MANIFEST ANALYSIS

NO	ISSUE	SEVERITY	DESCRIPTION
1	App has a Network Security Configuration [android:networkSecurityConfig=@xml/network_security_config]	info	The Network Security Configuration feature lets apps customize their network security settings in a safe, declarative configuration file without modifying app code. These settings can be configured for specific domains and for a specific app.
2	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.
3	Service (org.adaway.vpn.VpnService) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_VPN_SERVICE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.
4	Service (org.adaway.tile.AdBlockingTileService) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_QUICK_SETTINGS_TILE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.
5	Broadcast Receiver (org.adaway.broadcast.BootReceiver) is not Protected. [android:exported=true]	high	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.

NO	ISSUE	SEVERITY	DESCRIPTION
6	Broadcast Receiver (org.adaway.broadcast.CommandReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: org.adaway.permission.SEND_COMMAND protectionLevel: dangerous [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission. However, the protection level of the permission is set to dangerous. This means that a malicious application can request and obtain the permission and interact with the component. If it was set to signature, only applications signed with the same certificate could obtain the permission.
7	Broadcast Receiver (org.adaway.broadcast.UpdateReceiver) is not Protected. [android:exported=true]	high	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
8	Service (androidx.work.impl.background.systemjob.SystemJobService) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.BIND_JOB_SERVICE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.
9	Broadcast Receiver (androidx.work.impl.diagnostics.DiagnosticsReceiver) is Protected by a permission, but the protection level of the permission should be checked. Permission: android.permission.DUMP [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.



NO	ISSUE	SEVERITY	STANDARDS	FILES
1	The App logs information. Sensitive information should never be logged.	info	CWE: CWE-532: Insertion of Sensitive Information into Log File OWASP MASVS: MSTG-STORAGE-3	org/adaway/ui/prefs/PrefsMainFragment.java io/sentry/SystemOutLogger.java com/topjohnwu/superuser/internal/Utils.java timber/log/Timber.java org/adaway/vpn/FileHelper.java org/adaway/util/log/ApplicationLog.java org/slf4j/impl/AndroidLoggerAdapter.java org/slf4j/helpers/Util.java org/slf4j/helpers/Util.java org/adaway/vpn/DnsServerMapper.java org/adaway/ui/welcome/WelcomeSupportFra gment.java org/adaway/vpn/DnsPacketProxy.java org/adaway/vpn/VpnWorker.java org/adaway/vpn/VpnWorker.java org/adaway/vpn/VpnWorker.java org/adaway/vpn/VpnWorker.java org/adaway/vpn/VpnWorker.java org/adaway/vpn/VpnWorker.java org/adaway/vpn/VpnWorker.java
2	App can read/write to External Storage. Any App can read data written to External Storage.	warning	CWE: CWE-276: Incorrect Default Permissions OWASP Top 10: M2: Insecure Data Storage OWASP MASVS: MSTG-STORAGE-2	io/sentry/android/core/DefaultAndroidEventP rocessor.java
3	This App may have root detection capabilities.	secure	OWASP MASVS: MSTG-RESILIENCE-1	io/sentry/android/core/DefaultAndroidEventP rocessor.java io/sentry/android/core/util/RootChecker.java
4	IP Address disclosure	warning	CWE: CWE-200: Information Exposure OWASP MASVS: MSTG-CODE-2	org/adaway/vpn/DnsServerMapper.java org/adaway/model/source/SourceLoader.java
5	The App uses an insecure Random Number Generator.	warning	CWE: CWE-330: Use of Insufficiently Random Values OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-6	io/sentry/SentryClient.java org/xbill/DNS/Header.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
6	This App may request root (Super User) privileges.	warning	CWE: CWE-250: Execution with Unnecessary Privileges OWASP MASVS: MSTG-RESILIENCE-1	io/sentry/android/core/util/RootChecker.java

SHARED LIBRARY BINARY ANALYSIS

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
----	---------------	----	-----------------	-------	-------	---------	---------	---------------------

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
1	lib/armeabi-v7a/libsentry.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
2	lib/armeabi-v7a/libssl.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
3	lib/armeabi-v7a/libcrypto.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
4	lib/armeabi-v7a/libsentry- android.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
5	lib/armeabi- v7a/libwebserver_exec.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	True info The shared object has the following fortified functions: ['strcat_chk', 'strcpy_chk', 'FD_ISSET_chk', 'strlen_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
6	lib/armeabi- v7a/libc++_shared.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
7	lib/armeabi- v7a/libtcpdump_exec.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	True info The shared object has the following fortified functions: ['vsnprintf_chk', 'memcpy_chk', 'strlen_chk', 'strlcpy_chk', 'strncpy_chk', 'read_chk', 'memset_chk', 'fread_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
8	lib/x86/libsentry.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
9	lib/x86/libssl.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
10	lib/x86/libcrypto.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
11	lib/x86/libsentry-android.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
12	lib/x86/libwebserver_exec.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	True info The shared object has the following fortified functions: ['strcat_chk', 'strcpy_chk', '_FD_ISSET_chk', 'FD_SET_chk', 'strlen_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
13	lib/x86/libc++_shared.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
14	lib/x86/libtcpdump_exec.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	True info The shared object has the following fortified functions: ['vsnprintf_chk', 'memcpy_chk', 'strlen_chk', 'strlcpy_chk', 'strlcpy_chk', 'read_chk', 'read_chk', 'fread_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
15	lib/arm64-v8a/libsentry.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	True info The shared object has the following fortified functions: ['vsnprintf_chk', 'strlen_chk', 'memcpy_chk', 'memmove_chk', 'read_chk', 'strcat_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
16	lib/arm64-v8a/libssl.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
17	lib/arm64-v8a/libcrypto.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
18	lib/arm64-v8a/libsentry- android.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	True info The shared object has the following fortified functions: ['strrchr_chk', 'strcat_chk', 'strcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
19	lib/arm64- v8a/libwebserver_exec.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	True info The shared object has the following fortified functions: ['strcat_chk', 'strcpy_chk', 'FD_ISSET_chk', 'FD_SET_chk', 'strlen_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
20	lib/arm64-v8a/libc++_shared.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	True info The shared object has the following fortified functions: ['vsnprintf_chk', 'strlen_chk', 'read_chk', 'memmove_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
21	lib/arm64- v8a/libtcpdump_exec.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	True info The shared object has the following fortified functions: ['vsnprintf_chk', 'memcpy_chk', 'strlen_chk', 'strlcpy_chk', 'strlcpy_chk', 'read_chk', 'read_chk', 'fread_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
22	lib/x86_64/libsentry.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	True info The shared object has the following fortified functions: ['memcpy_chk', 'strlen_chk', 'strcat_chk', 'read_chk', 'memmove_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
23	lib/x86_64/libssl.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
24	lib/x86_64/libcrypto.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
25	lib/x86_64/libsentry-android.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	True info The shared object has the following fortified functions: ['strcat_chk', 'strcpy_chk', 'strrchr_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
26	lib/x86_64/libwebserver_exec.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	True info The shared object has the following fortified functions: ['strcat_chk', 'strcpy_chk', 'FD_ISSET_chk', 'FD_SET_chk', 'strlen_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
27	lib/x86_64/libc++_shared.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	True info The shared object has the following fortified functions: ['vsnprintf_chk', 'strlen_chk', 'read_chk', 'memmove_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
28	lib/x86_64/libtcpdump_exec.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	True info The shared object has the following fortified functions: ['vsnprintf_chk', 'memcpy_chk', 'strlen_chk', 'strlcpy_chk', 'strncpy_chk', 'read_chk', 'memset_chk', 'fread_chk']	True info Symbols are stripped.

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
1	FCS_RBG_EXT.1.1	Security Functional Requirements	Random Bit Generation Services	The application invoke platform-provided DRBG functionality for its cryptographic operations.
2	FCS_STO_EXT.1.1	Security Functional Requirements	Storage of Credentials	The application invoke the functionality provided by the platform to securely store credentials to non-volatile memory.
3	FCS_CKM_EXT.1.1	Security Functional Requirements	Cryptographic Key Generation Services	The application generate no asymmetric cryptographic keys.
4	FDP_DEC_EXT.1.1	Security Functional Requirements	Access to Platform Resources	The application has access to ['network connectivity'].
5	FDP_DEC_EXT.1.2	Security Functional Requirements	Access to Platform Resources	The application has access to no sensitive information repositories.
6	FDP_NET_EXT.1.1	Security Functional Requirements	Network Communications	The application has user/application initiated network communications.
7	FDP_DAR_EXT.1.1	Security Functional Requirements	Encryption Of Sensitive Application Data	The application does not encrypt files in non-volatile memory.
8	FMT_MEC_EXT.1.1	Security Functional Requirements	Supported Configuration Mechanism	The application invoke the mechanisms recommended by the platform vendor for storing and setting configuration options.
9	FTP_DIT_EXT.1.1	Security Functional Requirements	Protection of Data in Transit	The application does encrypt some transmitted data with HTTPS/TLS/SSH between itself and another trusted IT product.

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
10	FCS_RBG_EXT.2.1,FCS_RBG_EXT.2.2	Selection-Based Security Functional Requirements	Random Bit Generation from Application	The application perform all deterministic random bit generation (DRBG) services in accordance with NIST Special Publication 800-90A using Hash_DRBG. The deterministic RBG is seeded by an entropy source that accumulates entropy from a platform-based DRBG and a software-based noise source, with a minimum of 256 bits of entropy at least equal to the greatest security strength (according to NIST SP 800-57) of the keys and hashes that it will generate.
11	FCS_COP.1.1(2)	Selection-Based Security Functional Requirements	Cryptographic Operation - Hashing	The application perform cryptographic hashing services in accordance with a specified cryptographic algorithm SHA-1/SHA-256/SHA-384/SHA-512 and message digest sizes 160/256/384/512 bits.
12	FCS_HTTPS_EXT.1.1	Selection-Based Security Functional Requirements	HTTPS Protocol	The application implement the HTTPS protocol that complies with RFC 2818.
13	FCS_HTTPS_EXT.1.2	Selection-Based Security Functional Requirements	HTTPS Protocol	The application implement HTTPS using TLS.
14	FCS_HTTPS_EXT.1.3	Selection-Based Security Functional Requirements	HTTPS Protocol	The application notify the user and not establish the connection or request application authorization to establish the connection if the peer certificate is deemed invalid.
15	FIA_X509_EXT.2.1	Selection-Based Security Functional Requirements	X.509 Certificate Authentication	The application use X.509v3 certificates as defined by RFC 5280 to support authentication for HTTPS , TLS.

Q DOMAIN MALWARE CHECK

DOMAIN	STATUS	GEOLOCATION
pgl.yoyo.org	ok	IP: 213.230.210.231 Country: United Kingdom of Great Britain and Northern Ireland Region: England City: London Latitude: 51.508530 Longitude: -0.125740 View: Google Map
raw.githubusercontent.com	ok	IP: 185.199.108.133 Country: United States of America Region: Pennsylvania City: California Latitude: 40.065632 Longitude: -79.891708 View: Google Map
isabrowser.adaway.org	ok	No Geolocation information available.
app.adaway.org	ok	IP: 213.186.33.3 Country: France Region: Hauts-de-France City: Roubaix Latitude: 50.694210 Longitude: 3.174560 View: Google Map
gist.githubusercontent.com	ok	IP: 185.199.109.133 Country: United States of America Region: Pennsylvania City: California Latitude: 40.065632 Longitude: -79.891708 View: Google Map


DOMAIN	STATUS	GEOLOCATION
www.slf4j.org	ok	IP: 83.166.144.67 Country: Switzerland Region: Geneve City: Carouge Latitude: 46.180962 Longitude: 6.139210 View: Google Map
github.com	ok	IP: 140.82.121.4 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
adaway.org	ok	IP: 185.199.110.153 Country: United States of America Region: Pennsylvania City: California Latitude: 40.065632 Longitude: -79.891708 View: Google Map
gitlab.com	ok	IP: 172.65.251.78 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

DOMAIN	STATUS	GEOLOCATION
wiki.lineageos.org	ok	IP: 172.67.69.209 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
api.github.com	ok	IP: 140.82.121.5 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
paypal.me ok		IP: 64.4.250.37 Country: United States of America Region: Washington City: Seattle Latitude: 47.606209 Longitude: -122.332069 View: Google Map


HARDCODED SECRETS

POSSIBLE SECRETS

"pref_ad_block_method_key" : "adBlockMethod"

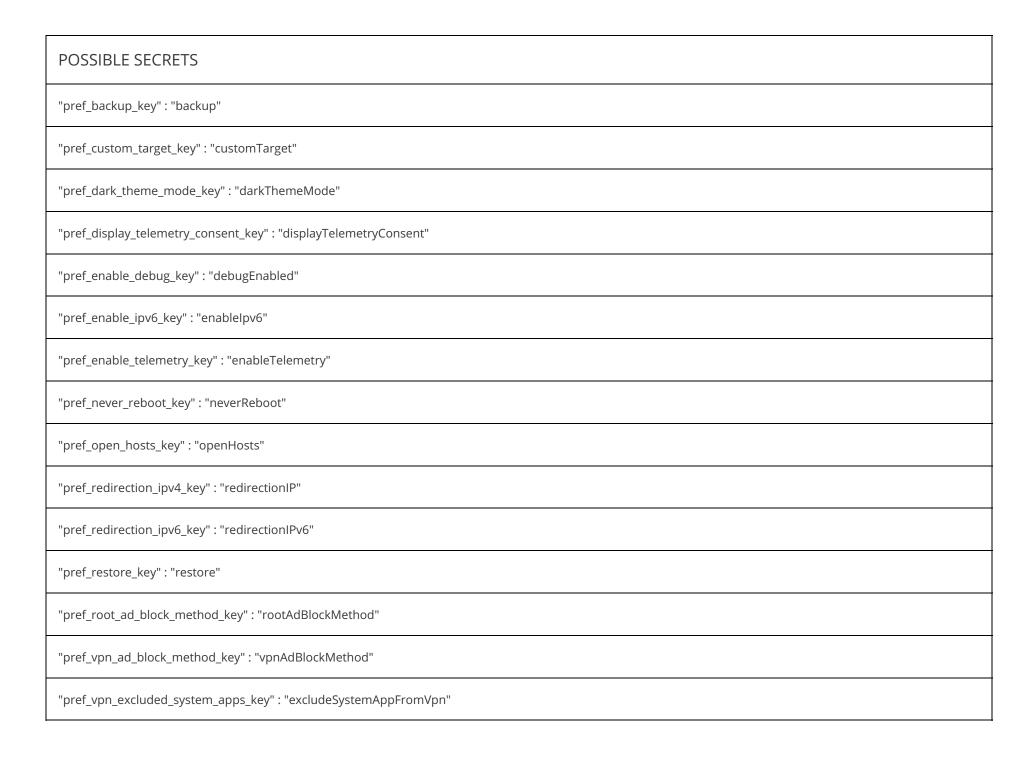



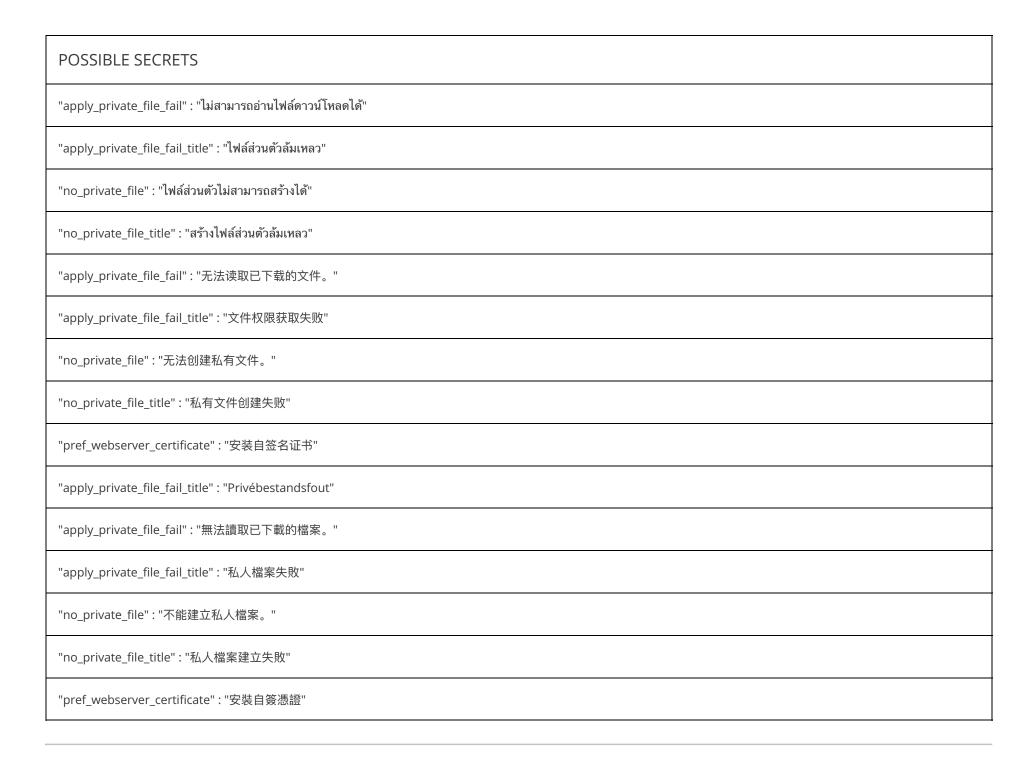

Report Generated by - MobSF v3.5.2 Beta

Mobile Security Framework (MobSF) is an automated, all-in-one mobile application (Android/iOS/Windows) pen-testing, malware analysis and security assessment framework capable of performing static and dynamic analysis.

© 2022 Mobile Security Framework - MobSF | Ajin Abraham | OpenSecurity.