

ANDROID STATIC ANALYSIS REPORT



DroidFish (1.82)

File Name:	installer220.apk			
Package Name:	org.petero.droidfish			
Scan Date:	May 31, 2022, 3:51 p.m.			
App Security Score:	46/100 (MEDIUM RISK)			
Grade:				

FINDINGS SEVERITY

派 HIGH	▲ MEDIUM	i INFO	✓ SECURE	♥ HOTSPOT
2	5	2	1	1

FILE INFORMATION

File Name: installer220.apk

Size: 6.49MB

MD5: 1d56e6ad628620b43772dcad181e15ae

SHA1: 02eda29db39bdbb02f7a9f4b68ab8e7ababea97b

SHA256: 90ce8b52708fd51f29f0899de7e0762802689dc0702c19be8cc22e233df33206

i APP INFORMATION

App Name: DroidFish

Package Name: org.petero.droidfish

 $\textbf{\textit{Main Activity}:} \ org. petero. droid fish. Droid Fish$

Target SDK: 28 Min SDK: 16 Max SDK:

Android Version Name: 1.82 Android Version Code: 92

EE APP COMPONENTS

Activities: 9 Services: 0 Receivers: 0 Providers: 1

Exported Activities: O Exported Services: O Exported Receivers: O Exported Providers: O



APK is signed v1 signature: True v2 signature: False v3 signature: False

Found 1 unique certificates

Subject: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid

Signature Algorithm: rsassa_pkcs1v15 Valid From: 2012-10-01 10:55:44+00:00 Valid To: 2040-02-17 10:55:44+00:00

Issuer: C=UK, ST=ORG, L=ORG, O=fdroid.org, OU=FDroid, CN=FDroid

Serial Number: 0x506976b0 Hash Algorithm: sha1

md5: cc97ec540884a1e9d9206758e1ee2527

sha1: f6c72af71389c411198ebed3386a62a3d54cb756

sha256: 667627 ffe 56b 46d 76ecc 5 fa 2264 ca 5747373 c 7fb 93d 5d 4f1 99302 f5 21b 4a eabc

sha512: a9144c5e0463b1985a1f7e03fd14863359fdfad2b14d1fa32759c83dfa0cf2545bb9c23a3b6e4ab8bd09423035313dec3891b523584f969cb94126b3aeafbb59

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate

TITLE	SEVERITY	DESCRIPTION
Application vulnerable to Janus Vulnerability	high	Application is signed with v1 signature scheme, making it vulnerable to Janus vulnerability on Android 5.0-8.0, if signed only with v1 signature scheme. Applications running on Android 5.0-7.0 signed with v1, and v2/v3 scheme is also vulnerable.
Certificate algorithm might be vulnerable to hash collision	high	Application is signed with SHA1withRSA. SHA1 hash algorithm is known to have collision issues.

⋮ APPLICATION PERMISSIONS

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.WRITE_EXTERNAL_STORAGE	dangerous	read/modify/delete external storage contents	Allows an application to write to external storage.
android.permission.INTERNET	normal	full Internet access	Allows an application to create network sockets.
android.permission.VIBRATE	normal	control vibrator	Allows the application to control the vibrator.

M APKID ANALYSIS

FILE	DETAILS	
------	---------	--

FILE	DETAILS					
	FINDINGS	DETAILS				
	Anti-VM Code	Build.MANUFACTURER check				
classes.dex	Compiler	r8				

△ NETWORK SECURITY

	NO	SCOPE	SEVERITY	DESCRIPTION
--	----	-------	----------	-------------

Q MANIFEST ANALYSIS

NO	ISSUE	SEVERITY	DESCRIPTION
1	Application Data can be Backed up [android:allowBackup=true]	warning	This flag allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.



NO	ISSUE	SEVERITY	STANDARDS	FILES	
1	The App logs information. Sensitive information should never be logged.	info	CWE: CWE-532: Insertion of Sensitive Information into Log File OWASP MASVS: MSTG-STORAGE-3	tourguide/tourguide/TourGuide.java com/caverock/androidsvg/CSSParser.java com/caverock/androidsvg/SVGAndroidRendere r.java com/kalab/chess/enginesupport/ChessEngine.j ava com/caverock/androidsvg/SimpleAssetResolver .java chess/HumanPlayer.java net/margaritov/preference/colorpicker/ColorPi ckerPreference.java com/caverock/androidsvg/SVGParser.java chess/Book.java chess/TreeLogger.java chess/ComputerPlayer.java tourguide/tourguide/FrameLayoutWithHole.jav a chess/Game.java com/caverock/androidsvg/SVG.java chess/Search.java guibase/ChessController.java com/kalab/chess/enginesupport/ChessEngineR esolver.java com/caverock/androidsvg/SVGImageView.java	
2	This App copies data to clipboard. Sensitive data should not be copied to clipboard as other applications can access it.	info	OWASP MASVS: MSTG-STORAGE-10	org/petero/droidfish/activities/EditBoard.java org/petero/droidfish/DroidFish.java	
3	The App uses an insecure Random Number Generator.	warning	CWE: CWE-330: Use of Insufficiently Random Values OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-6	org/petero/droidfish/engine/cuckoochess/Droi dEngineControl.java chess/Book.java org/petero/droidfish/book/DroidBook.java	

NO	ISSUE	SEVERITY	STANDARDS	FILES
4	App can read/write to External Storage. Any App can read data written to External Storage.	warning	CWE: CWE-276: Incorrect Default Permissions OWASP Top 10: M2: Insecure Data Storage OWASP MASVS: MSTG-STORAGE-2	org/petero/droidfish/activities/util/EditFilePrefe rence.java org/petero/droidfish/engine/InternalStockFish.j ava org/petero/droidfish/DroidFish.java org/petero/droidfish/engine/cuckoochess/Cuck ooChessEngine.java org/petero/droidfish/FileUtil.java
5	SHA-1 is a weak hash known to have hash collisions.	warning	CWE: CWE-327: Use of a Broken or Risky Cryptographic Algorithm OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-4	chess/Position.java org/petero/droidfish/gamelogic/Position.java org/petero/droidfish/engine/InternalStockFish.j ava

SHARED LIBRARY BINARY ANALYSIS

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
----	---------------	----	-----------------	-------	-------	---------	---------	---------------------

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
1	lib/armeabi-v7a/librtb.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
2	lib/armeabi-v7a/libgtb.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
3	lib/armeabi- v7a/libnativeutil.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
4	lib/x86/librtb.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
5	lib/x86/libgtb.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
6	lib/x86/libnativeutil.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
7	lib/arm64-v8a/librtb.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
8	lib/arm64-v8a/libgtb.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
9	lib/arm64-v8a/libnativeutil.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector-all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
10	lib/x86_64/librtb.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
11	lib/x86_64/libgtb.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	True info This shared object has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
12	lib/x86_64/libnativeutil.so	True info The shared object has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	False high This shared object does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector-all to enable stack canaries.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The shared object does not have run-time search path or RPATH set.	None info The shared object does not have RUNPATH set.	False warning The shared object does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions.	True info Symbols are stripped.

■ NIAP ANALYSIS v1.3

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
----	------------	-------------	---------	-------------

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
1	FCS_RBG_EXT.1.1	Security Functional Requirements	Random Bit Generation Services	The application invoke platform-provided DRBG functionality for its cryptographic operations.
2	FCS_STO_EXT.1.1	Security Functional Requirements	Storage of Credentials	The application does not store any credentials to non-volatile memory.
3	FCS_CKM_EXT.1.1	Security Functional Requirements	Cryptographic Key Generation Services	The application generate no asymmetric cryptographic keys.
4	FDP_DEC_EXT.1.1	Security Functional Requirements	Access to Platform Resources	The application has access to ['network connectivity'].
5	FDP_DEC_EXT.1.2	Security Functional Requirements	Access to Platform Resources	The application has access to no sensitive information repositories.
6	FDP_NET_EXT.1.1	Security Functional Requirements	Network Communications	The application has user/application initiated network communications.
7	FDP_DAR_EXT.1.1	Security Functional Requirements	Encryption Of Sensitive Application Data	The application implement functionality to encrypt sensitive data in non-volatile memory.
8	FMT_MEC_EXT.1.1	Security Functional Requirements	Supported Configuration Mechanism	The application invoke the mechanisms recommended by the platform vendor for storing and setting configuration options.
9	FTP_DIT_EXT.1.1	Security Functional Requirements	Protection of Data in Transit	The application does encrypt some transmitted data with HTTPS/TLS/SSH between itself and another trusted IT product.


NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
10	FCS_RBG_EXT.2.1,FCS_RBG_EXT.2.2	Selection-Based Security Functional Requirements	Random Bit Generation from Application	The application perform all deterministic random bit generation (DRBG) services in accordance with NIST Special Publication 800-90A using Hash_DRBG. The deterministic RBG is seeded by an entropy source that accumulates entropy from a platform-based DRBG and a software-based noise source, with a minimum of 256 bits of entropy at least equal to the greatest security strength (according to NIST SP 800-57) of the keys and hashes that it will generate.
11	FCS_COP.1.1(2)	Selection-Based Security Functional Requirements	Cryptographic Operation - Hashing	The application perform cryptographic hashing services in accordance with a specified cryptographic algorithm SHA-1/SHA-256/SHA-384/SHA-512 and message digest sizes 160/256/384/512 bits.

Q DOMAIN MALWARE CHECK

DOMAIN	STATUS	GEOLOCATION
www.w3.org	ok	IP: 128.30.52.100 Country: United States of America Region: Massachusetts City: Cambridge Latitude: 42.365078 Longitude: -71.104523 View: Google Map

DOMAIN	STATUS	GEOLOCATION	
xml.org	ok	IP: 104.239.240.11 Country: United States of America Region: Texas City: Windcrest Latitude: 29.499678 Longitude: -98.399246 View: Google Map	
hem.bredband.net	ok	IP: 195.54.99.5 Country: Sweden Region: Orebro lan City: Karlskoga Latitude: 59.326672 Longitude: 14.523860 View: Google Map	
xmlpull.org	ok	IP: 74.50.61.58 Country: United States of America Region: Texas City: Dallas Latitude: 32.814899 Longitude: -96.879204 View: Google Map	
schemas.android.com	ok	No Geolocation information available.	



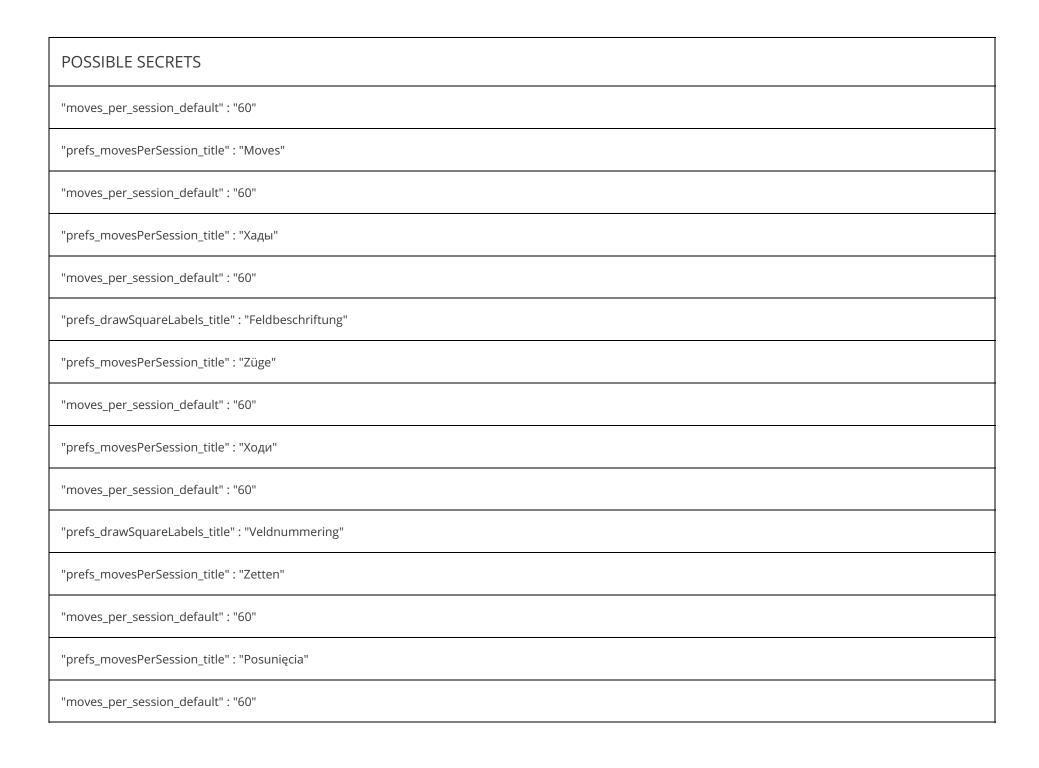



POSSIBLE SECRETS "moves_per_session_default": "60" "prefs_drawSquareLabels_title": "棋格标签" "prefs_movesPerSession_summary": "走棋步数的时间限制" "prefs_movesPerSession_title": "走棋"

Report Generated by - MobSF v3.5.2 Beta

Mobile Security Framework (MobSF) is an automated, all-in-one mobile application (Android/iOS/Windows) pen-testing, malware analysis and security assessment framework capable of performing static and dynamic analysis.

© 2022 Mobile Security Framework - MobSF | Ajin Abraham | OpenSecurity.