



**WEB PROGRAMIRANJE PHP2**  
**DOKUMENTACIJA PROJEKTA**  
**ENERGY FITNESS - BLOG**

Student:

Jovan Ranković 145/14

Beograd 2019.

## Sadržaj

1.	Opis funkcionalnosti .....	1
2.	Skica struktura stranica .....	1
2.1.	Front .....	1
2.2.	Admin.....	2
3.	Dijagram baze podataka .....	3
4.	MVC Organizacija .....	4
4.1.	Kontroleri .....	4
4.1.1.	Home .....	4
4.1.2.	MyAuth .....	4
4.1.3.	Resource .....	4
4.2.	Modeli .....	5
4.3.	View-ovi.....	6
4.3.1.	Admin.....	6
4.3.2.	Errors .....	7
4.3.3.	Front .....	8
4.3.4.	Layouts .....	8
5.	JS kod .....	8
5.1.	ajax.js.....	9
5.2.	ajax_admin.js.....	11
6.	PHP kod.....	11
6.1.	Controllers.....	11
6.1.1.	Home .....	11
6.1.1.1.	AdminController.php .....	11
6.1.1.2.	FrontendController.php .....	12
6.1.2.	MyAuth .....	14
6.1.2.1.	LoginController.php .....	14
6.1.2.2.	RegisterController.php .....	15
6.1.3.	Resource .....	16
6.1.3.1.	CommentController.php.....	16
6.1.3.2.	MenuController.php .....	18
6.1.3.3.	PostController.php.....	19
6.1.3.4.	PriceController.php .....	21

6.1.3.5. ServiceController.php .....	22
6.1.3.6. SliderController.php .....	23
6.1.3.7. SocialController.php .....	25
6.1.3.8. TrainerController.php .....	26
6.1.3.9. UserController.php .....	28
6.2. Middleware.....	30
6.2.1. Admin.php.....	30
6.3. Requests .....	31
6.3.1. CommentRequest.php .....	31
6.3.2. MenuRequest.php.....	31
6.3.3. PostRequest.php .....	32
6.3.4. PriceRequest.php.....	32
6.3.5. ServiceRequest.php .....	33
6.3.6. SliderRequest.php .....	33
6.3.7. SocialRequest.php .....	34
6.3.8. TrainerRequest.php .....	34
6.3.9. UserRequest.php .....	35
6.3.10. ContactRequest.php.....	36
6.3.11. RegisterRequest.php.....	37
6.4. Models .....	37
6.4.1. Comment.php .....	37
6.4.2. Menu.php.....	38
6.4.3. Post.php .....	38
6.4.4. Price.php.....	39
6.4.5. Service.php .....	39
6.4.6. Slider.php .....	39
6.4.7. Social.php .....	40
6.4.8. Trainer.php .....	40
6.4.9. User.php .....	40
6.4.10. Role.php .....	41
6.5. Views.....	41
6.5.1. admin .....	41
6.5.1.1. pages.....	41
6.5.1.1.1. home.blade.php .....	41

6.5.1.1.2. menus .....	42
6.5.1.1.2.1. create.blade.php.....	42
6.5.1.1.2.2. edit.blade.php .....	43
6.5.1.1.2.3. index.blade.php .....	44
6.5.1.1.3. posts.....	45
6.5.1.1.3.1. create.blade.php.....	45
6.5.1.1.3.2. edit.blade.php .....	46
6.5.1.1.3.3. index.blade.php .....	48
6.5.1.1.4. prices .....	49
6.5.1.1.4.1. create.blade.php.....	49
6.5.1.1.4.2. edit.blade.php .....	50
6.5.1.1.4.3. index.blade.php .....	51
6.5.1.1.5. services .....	53
6.5.1.1.5.1. create.blade.php.....	53
6.5.1.1.5.2. edit.blade.php .....	54
6.5.1.1.5.3. index.blade.php .....	55
6.5.1.1.6. sliders .....	56
6.5.1.1.6.1. create.blade.php.....	56
6.5.1.1.6.2. edit.blade.php .....	57
6.5.1.1.6.3. index.blade.php .....	58
6.5.1.1.7. socials .....	60
6.5.1.1.7.1. create.blade.php.....	60
6.5.1.1.7.2. edit.blade.php .....	61
6.5.1.1.7.3. index.blade.php .....	62
6.5.1.1.8. trainers .....	64
6.5.1.1.8.1. create.blade.php.....	64
6.5.1.1.8.2. edit.blade.php .....	65
6.5.1.1.8.3. index.blade.php .....	66
6.5.1.1.9. users.....	68
6.5.1.1.9.1. create.blade.php.....	68
6.5.1.1.9.2. edit.blade.php .....	69
6.5.1.1.9.3. index.blade.php .....	71
6.5.1.2. partials .....	73
6.5.1.2.1. common .....	73

6.5.1.2.1.1. head.blade.php .....	73
6.5.1.2.1.2. loader.blade.php .....	73
6.5.1.2.1.3. nav.blade.php .....	74
6.5.1.2.1.4. scripts.blade.php .....	74
6.5.1.2.1.5. sidebar.blade.php .....	75
6.5.1.2.2. home .....	78
6.5.1.2.2.1. db_info.blade.php .....	78
6.5.2. errors.....	81
6.5.2.1. 403.blade.php .....	81
6.5.2.2. 404.blade.php .....	83
6.5.2.1. 419.blade.php .....	85
6.5.3. front .....	87
6.5.3.1. pages .....	87
6.5.3.1.1. home.blade.php .....	87
6.5.3.1.2. post.blade.php .....	89
6.5.3.1. partials .....	90
6.5.3.1.1. common .....	90
6.5.3.1.1.1. footer.blade.php .....	90
6.5.3.1.1.2. head.blade.php .....	91
6.5.3.1.1.3. nav.blade.php .....	92
6.5.3.1.1.4. preloader.blade.php .....	95
6.5.3.1.1.5. scripts.blade.php .....	95
6.5.3.1.2. home .....	96
6.5.3.1.2.1. about.blade.php .....	96
6.5.3.1.2.2. blog.blade.php .....	96
6.5.3.1.2.3. contact.blade.php .....	97
6.5.3.1.2.4. map.blade.php .....	98
6.5.3.1.2.5. prices.blade.php .....	98
6.5.3.1.2.6. trainers.blade.php .....	99
6.5.3.1.2.7. welcome.blade.php .....	99
6.5.3.1.3. post .....	100
6.5.3.1.3.1. comments.blade.php .....	100
6.5.3.1.3.2. content.blade.php .....	102
6.5.3.1.3.3. form.blade.php .....	102

6.5.3.1.3.4. header.blade.php.....	103
6.5.4. layouts .....	103
6.5.4.1. admin.blade.php .....	104
6.5.4.2. front.blade.php .....	104
6.6. Routes (web.php) .....	104

## 1. Opis funkcionalnosti

Korišćeni jezici	<ul style="list-style-type: none"> <li>• HTML</li> <li>• CSS</li> <li>• JS</li> <li>• PHP</li> </ul>
Korišćeni HTML šabloni (framework-ci)	<ul style="list-style-type: none"> <li>• Korišćen je template</li> <li>• Nije korišćen frontend framework</li> </ul>
Korišćene biblioteke i njihovi url-ovi odakle ste ih preuzeli	<ul style="list-style-type: none"> <li>• Bootstrap Select</li> <li>• SmoothScroll</li> <li>• Wow</li> <li>• jQuery Nav, Parallax, Backstretch</li> <li>• Animate</li> <li>• Font Awesome</li> <li>• Material Icons</li> </ul>
Korišćene biblioteke iz framework-a	<ul style="list-style-type: none"> <li>• Bootstrap</li> <li>• jQuery</li> </ul>
Korišćene php biblioteke van framework-a	<ul style="list-style-type: none"> <li>• Telescope</li> </ul>
Koje funkcionalnosti su realizove putem AJAX-a	<ul style="list-style-type: none"> <li>• Dodavanje komentara</li> <li>• Izmena komentara</li> <li>• Brisanje komentara</li> <li>• Brisanje u admin panelu</li> </ul>
Navesti lokacije gde je napisan AJAX kod (fajlovi ili delovi html stranice)	<ul style="list-style-type: none"> <li>• public/js/ajax.js</li> <li>• public/admin_assets/ajax_admin.js</li> </ul>
Navesti lokacije gde je napisan sopstveni javaScript kod (fajlovi ili delovi html stranice)	<ul style="list-style-type: none"> <li>• public/js/ajax.js</li> <li>• public/admin_assets/ajax_admin.js</li> </ul>
URL sajta/aplikacije	<ul style="list-style-type: none"> <li>• <a href="http://energyfitness2019.000webhostapp.com/">http://energyfitness2019.000webhostapp.com/</a></li> </ul>
Pristupni parametri	<ul style="list-style-type: none"> <li>• Parametri poslani na e-mail</li> </ul>

Sajt ima sledeće funkcionalnosti:

- **Admin panel** – upravljanje podacima iz baze na sajtu, samo za korisnike sa administratorskim pravima.
- **Kontakt formu** – Posetioci sajta mogu poslati mail glavnom administratoru.
- **Registraciju** – Nakon registracije, korisniku se šalje aktivacioni mail. Ako ne potvrdi, ne može pristupiti sadržaju za autorizovane korisnike.
- **Logovanje i zaštita sesijama** – Aktivan korisnik se može ulogovati kako bi pristupio sadržaju za autorizovane korisnike.
- **Postove** – Samo administrator može postaviti post preko admin panela.
- **Komentare** – Samo ulogovani korisnici mogu komentarisati, izmeniti i obrisati svoj komentar, administratori mogu da brišu sve, rađeno preko Ajax-a.

- **Straničenje** – Dinamički prikaz po 4 posta na početnoj stranici, straničenje u admin panelu.
- **Galeriju** – odrađena u vidu trenera i slider-a.
- **Responsive** – celokupan sadržaj sajta je rađen u Bootstrapu, prilagođen prikaz za mobilne uređaje.
- **Intuitivan GUI** – posebna pažnja na UX (automatski refresh stranica, poruke, upozorenja pre brisanja, detaljni log-ovi), brojne modifikacije template-a, manje modifikacije biblioteka.
- **Telescope** – alatka za lakše praćenje aktivnosti na sajtu.



Hosting blokira PUT, PATCH i DELETE zahteve preko Ajax-a ukoliko niste premium i ne podržava slanje e-mailova preko SMTP-a, pa je korišćena funkcija mail().


Aktivacija naloga putem e-mail linka ne radi, jer hosting neće da šalje e-mail na adresu dobijenu preko promenljive.




## 2. Skica struktura stranica

### 2.1. Front

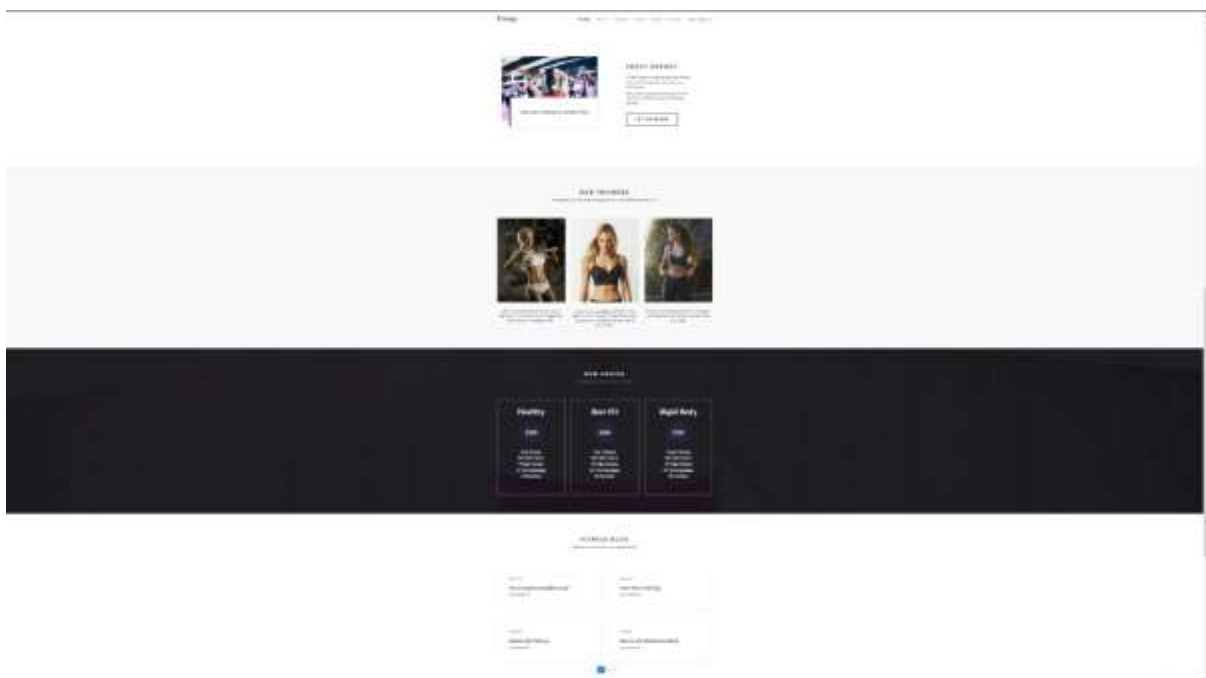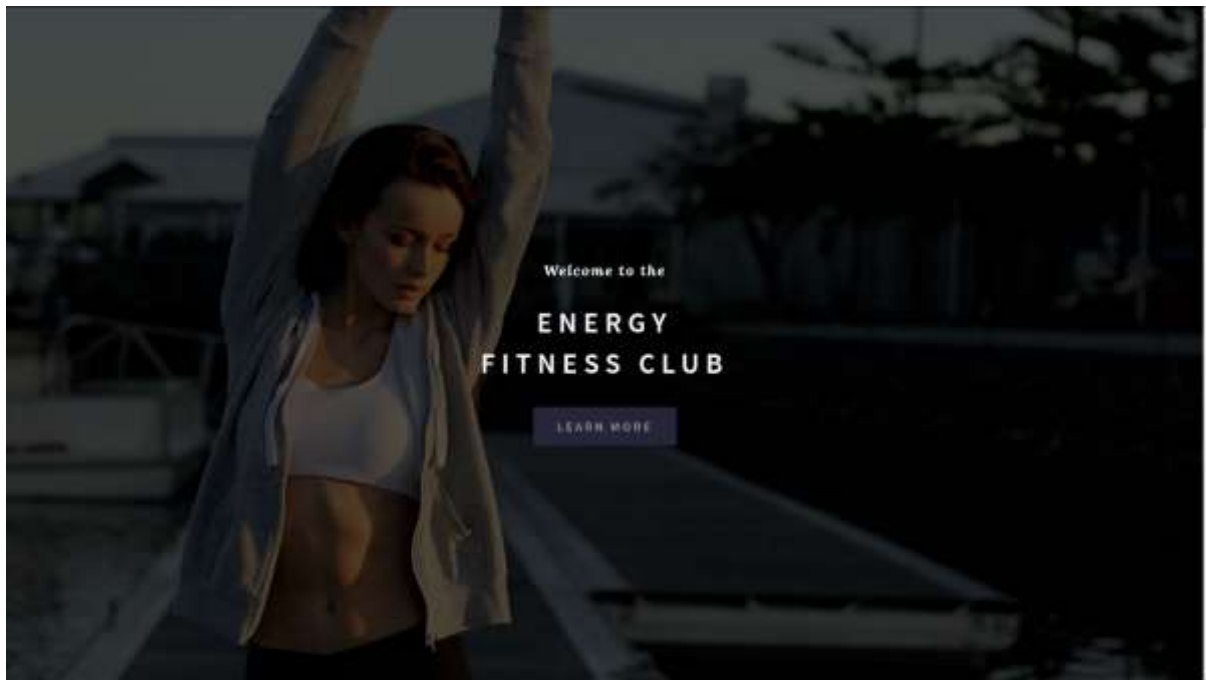


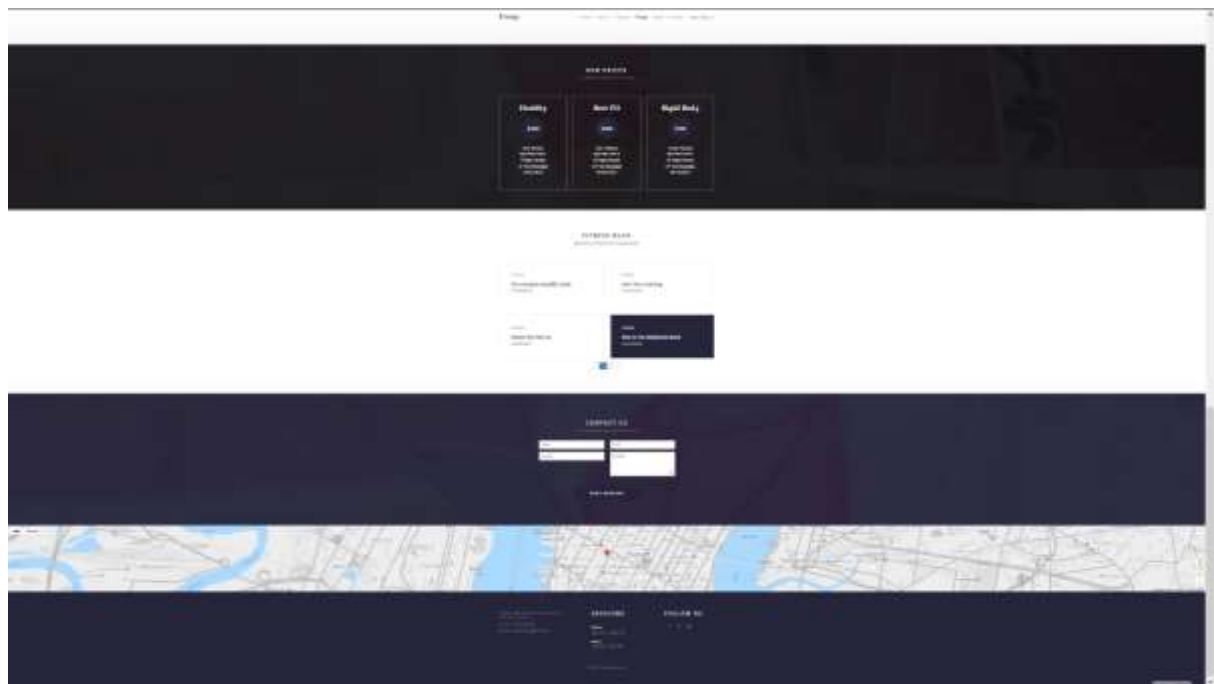

## 2.2. Admin

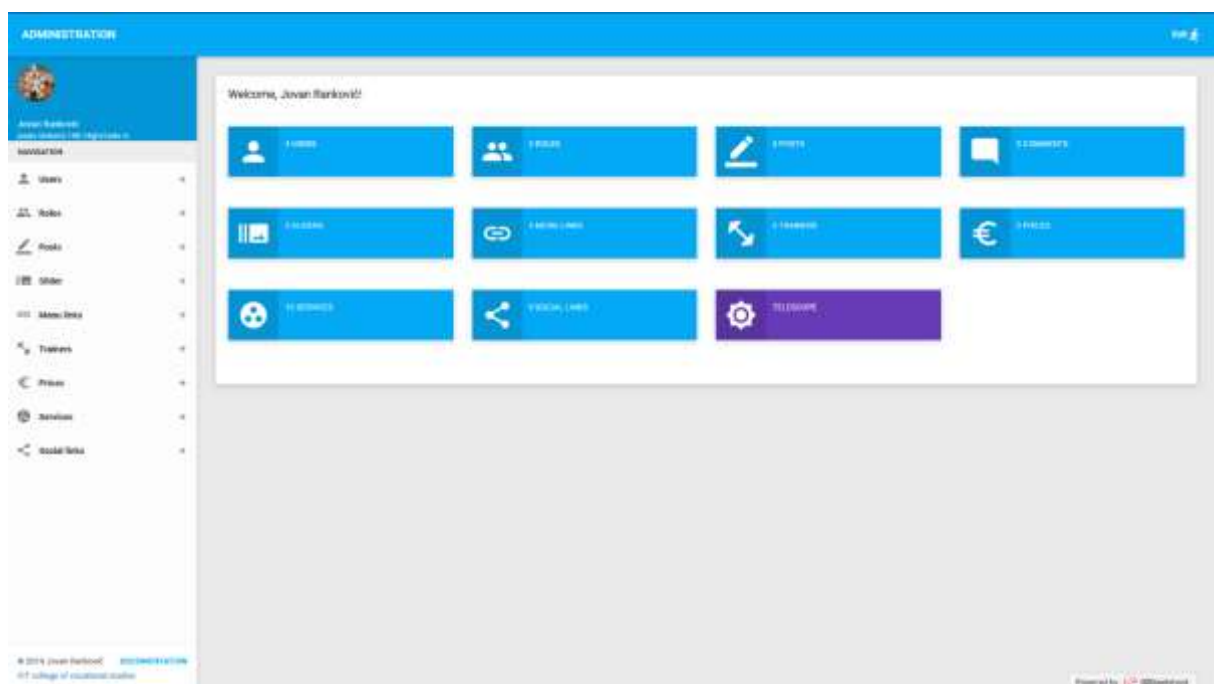

### 3. Dijagram baze podataka

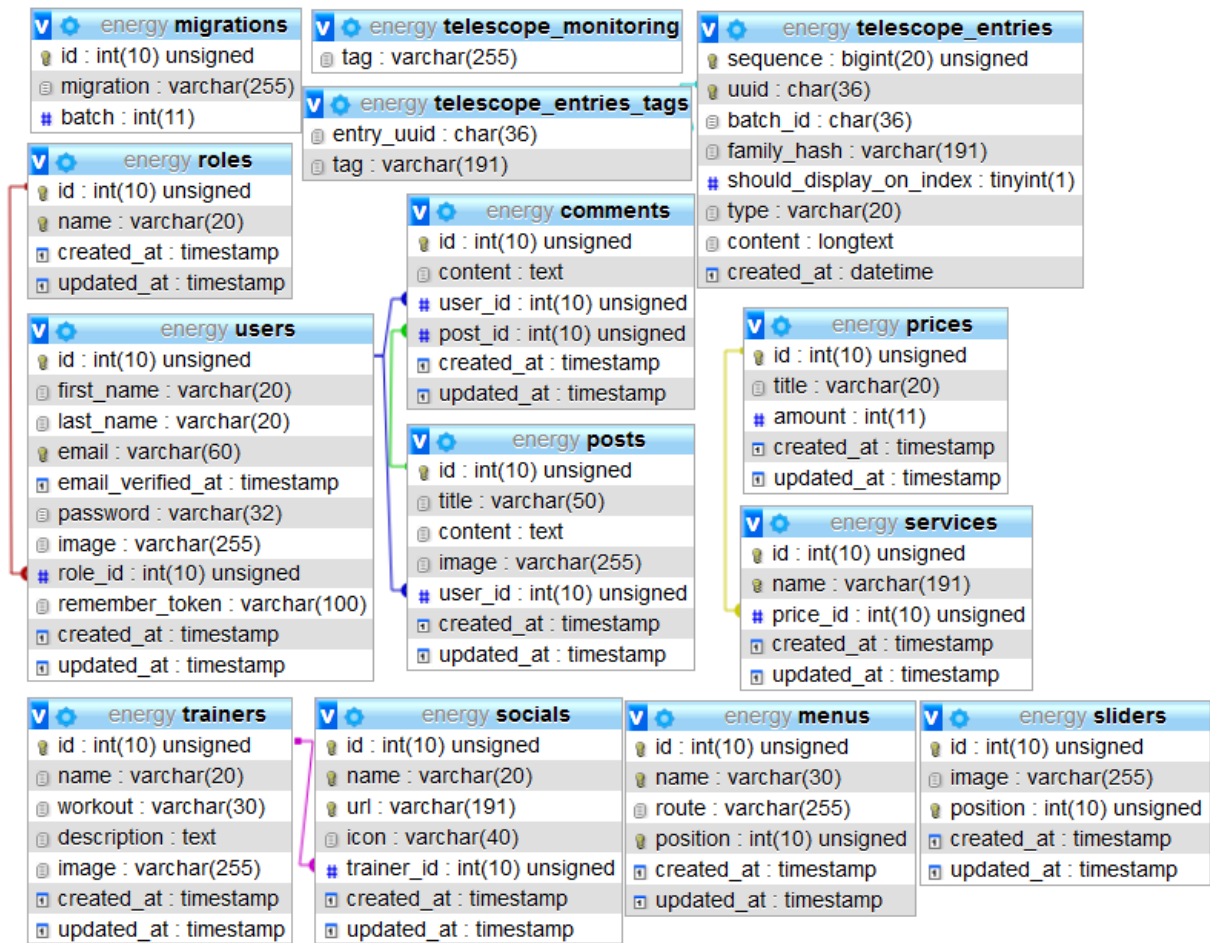

## 4. MVC Organizacija

### 4.1. Kontroleri

#### 4.1.1. Home

AdminController
<b>+home()</b>

FrontendController
<b>+home()</b>
<b>+contact(ContactRequest \$request)</b>
<b>+image_update(Request \$request, User \$user)</b>

#### 4.1.2. MyAuth

LoginController
<b>+login()</b>
<b>+logout()</b>

RegisterController
<b>+register()</b>
<b>+activate()</b>

#### 4.1.3. Resource

CommentController
<b>+index(Post \$post)</b>
<b>+store()</b>
<b>+destroy()</b>

MenuController
<b>resource</b>

PostController
<b>resource</b>

PriceController
resource

ServiceController
resource

SliderController
resource

SocialController
resource

TrainerController
resource

UserController
resource

## 4.2. Modeli

Comment
#guarded
+user()

Menu
#guarded

Post
#guarded
+user()
+comments()

Price
#guarded
+services()

Role

Service
#guarded
+price()

Slider
#guarded

Social
#guarded
+trainer()

Trainer
#guarded
+socials()

User
#guarded
+loginCheck()
+role()
+comments()
+posts()

### 4.3. View-ovi

#### 4.3.1. Admin

pages
home.blade.php

pages/menus
create.blade.php
edit.blade.php
index.blade.php

pages/posts
create.blade.php
edit.blade.php
index.blade.php

pages/prices
--------------

<b>create.blade.php</b>
<b>edit.blade.php</b>
<b>index.blade.php</b>

<b>pages/services</b>
<b>create.blade.php</b>
<b>edit.blade.php</b>
<b>index.blade.php</b>

<b>pages/sliders</b>
<b>create.blade.php</b>
<b>edit.blade.php</b>
<b>index.blade.php</b>

<b>pages/socials</b>
<b>create.blade.php</b>
<b>edit.blade.php</b>
<b>index.blade.php</b>

<b>pages/trainers</b>
<b>create.blade.php</b>
<b>edit.blade.php</b>
<b>index.blade.php</b>

<b>pages/users</b>
<b>create.blade.php</b>
<b>edit.blade.php</b>
<b>index.blade.php</b>

<b>partials/common</b>
<b>head.blade.php</b>
<b>loader.blade.php</b>
<b>nav.blade.php</b>
<b>scripts.blade.php</b>
<b>sidebar.blade.php</b>

<b>partials/home</b>
<b>db_info.blade.php</b>

#### 4.3.2. Errors

<b>403.blade.php</b>
<b>404.blade.php</b>
<b>419.blade.php</b>

#### 4.3.3. Front

<b>pages</b>
<b>home.blade.php</b>
<b>post.blade.php</b>

<b>partials/common</b>
<b>footer.blade.php</b>
<b>head.blade.php</b>
<b>nav.blade.php</b>
<b>preloader.blade.php</b>
<b>scripts.blade.php</b>

<b>partials/home</b>
<b>about.blade.php</b>
<b>blog.blade.php</b>
<b>contact.blade.php</b>
<b>map.blade.php</b>
<b>prices.blade.php</b>
<b>trainers.blade.php</b>
<b>welcome.blade.php</b>

<b>partials/post</b>
<b>comments.blade.php</b>
<b>content.blade.php</b>
<b>form.blade.php</b>
<b>header.blade.php</b>

#### 4.3.4. Layouts

<b>admin.blade.php</b>
<b>front.blade.php</b>

## 5. JS kod



## 5.1. ajax.js

```
$(document).ready(function () {
    $("#commentBtn").on("click", comment_store);
});

// comment_store
function comment_store(e) {
    e.preventDefault();

    let commentMsg = $("#commentMsg").val();
    let postId = $("#postId").val();
    let loggedUserId = $("#loggedUserId").val();
    let postTitle = $("#postTitle").val();
    let loggedUserFN = $("#loggedUserFN").val();
    let loggedUserLN = $("#loggedUserLN").val();

    let reCommentMsg = /^[^\\wĆČŽĐŠćčžđš .,!(\\?)'":-]{2,}$/;

    if(!commentMsg.match(reCommentMsg)){
        $(".blog-comment-form").prepend("<div class='alert alert-warning alert-dismissible' role='alert'>Bad message format.<button type='button' class='close' data-dismiss='alert' aria-label='Close'><span aria-hidden='true'>&times;</span></button>");
    }
    else{
        $.ajax({
            type: "post",
            url: BASE_URL + "/posts/"+postId+"/comments",
            data: {
                content: commentMsg,
                post_id : postId,
                user_id : loggedUserId,
                postTitle : postTitle,
                userFN : loggedUserFN,
                userLN : loggedUserLN,
                _token : TOKEN
            },
            success: function () {
                location.reload();
            },
            error: function (xhr) {
                $(".blog-comment-form").prepend("<div class='alert alert-warning alert-dismissible' role='alert'>"+xhr.status + ': ' +
                xhr.statusText+"<button type='button' class='close' data-dismiss='alert' aria-label='Close'><span aria-hidden='true'>&times;</span></button>");
            }
        });
    }
}

// comment_delete
function comment_delete(post_id, comment_id, user_id, commentContent, userFN, userLN, postTitle) {
    $.ajax({
        type: "delete",
```

```

url: BASE_URL + "/posts/" + post_id + "/comments/" + comment_id,
data: {
    post_id : post_id,
    id : comment_id,
    user_id : user_id,
    commentContent : commentContent,
    userFN : userFN,
    userLN : userLN,
    postTitle : postTitle,
    _token : TOKEN
},
success: function () {
    location.reload();
},
error: function (xhr) {
    $(".blog-comment-form").prepend("<div class='alert alert-warning alert-dismissible' role='alert'>" + xhr.status + ': ' + xhr.statusText + "<button type='button' class='close' data-dismiss='alert' aria-label='Close'><span aria-hidden='true'>&times;</span></button>");
}
});
}

// comment_update
function comment_update(post_id, comment_id, user_id, userFN, userLN, postTitle) {
    let editComment = $("#editComment").val();

    let reCommentMsg = /^[\\wĆČŽĐŠćčžďš .,!(\\?)':"-]{2,}$/;

    if(!editComment.match(reCommentMsg)){
        $(".blog-comment-form").prepend("<div class='alert alert-warning alert-dismissible' role='alert'>Bad message format.<button type='button' class='close' data-dismiss='alert' aria-label='Close'><span aria-hidden='true'>&times;</span></button>");
    }
    else{
        $.ajax({
            type: "PATCH",
            url: BASE_URL + "/posts/" + post_id + "/comments/" + comment_id,
            data: {
                post_id: post_id,
                id: comment_id,
                user_id: user_id,
                content: editComment,
                userFN: userFN,
                userLN: userLN,
                postTitle: postTitle,
                _token: TOKEN
            },
            success: function () {
                location.reload();
            },
            error: function (xhr) {
                $(".blog-comment-form").prepend("<div class='alert alert-warning alert-dismissible' role='alert'>" + xhr.status + ': ' + xhr.statusText + "<button type='button' class='close' data-dismiss='alert' aria-

```

```

label='Close'><span aria-hidden='true'>&times;</span></button>");
    }
  });
}
}

```

## 5.2. ajax\_admin.js

```

// deletion

function deletion(id, table) {
  $.ajax({
    type: "delete",
    url: BASE_URL+"/"+table+"/"+id,
    data: {
      id : id,
      _token : TOKEN
    },
    success: function () {
      location.reload();
    },
    error: function (xhr) {
      $(".table-responsive").prepend("<div class='alert alert-warning alert-dismissible' role='alert'>"+xhr.status + ': ' + xhr.statusText+"<button type='button' class='close' data-dismiss='alert' aria-label='Close'><span aria-hidden='true'>&times;</span></button>");
    }
  });
}

```

## 6. PHP kod

### 6.1. Controllers

#### 6.1.1. Home

##### 6.1.1.1. AdminController.php

```

<?php

namespace App\Http\Controllers\Home;

use App\Comment;
use App\Http\Controllers\Controller;
use App\Menu;
use App\Post;

```

```

use App\Price;
use App\Role;
use App\Service;
use App\Slider;
use App\Social;
use App\Trainer;
use App\User;

class AdminController extends Controller
{
    public function home()
    {
        $users = User::all();
        $roles = Role::all();
        $posts = Post::all();
        $comments = Comment::all();
        $sliders = Slider::all();
        $menus = Menu::all();
        $trainers = Trainer::all();
        $prices = Price::all();
        $services = Service::all();
        $socials = Social::all();

        return view('admin.pages.home', compact('users', 'roles', 'posts',
'comments', 'sliders', 'menus', 'trainers', 'prices', 'services', 'socials'));
    }
}

```

#### 6.1.1.2. FrontendController.php

```

<?php

namespace App\Http\Controllers\Home;

use App\Http\Controllers\Controller;
use App\Http\Requests\ContactRequest;
use App\Menu;
use App\Post;
use App\Price;
use App\Slider;
use App\Social;
use App\Trainer;
use App\User;
use Illuminate\Http\Request;
use Illuminate\Support\Facades\File;

class FrontendController extends Controller
{
    public function home()
    {
        $menus = Menu::orderBy('position')->get();
        $sliders = Slider::orderBy('position')->get();
        $trainers = Trainer::all();
        $prices = Price::orderBy('amount')->get();
        $posts = Post::latest('id')->paginate(4);
    }
}

```

```

        $socials = Social::whereNull('trainer_id')->get();

        return view('front.pages.home', compact('menus', 'sliders', 'trainers',
'prices', 'posts', 'socials'));
    }

    public function contact(ContactRequest $request)
    {
        $name = $request->conName;
        $email = $request->conEmail;
        $subject = $request->conSubject;
        $message = $request->conMsg;
        $headers = 'From: '.$name.' '.$email;

        try
        {
            mail('jovan.rankovic.145.14@ict.edu.rs', $subject, $message,
$headers);
            \Log::info('Contact message sent.');
```

```

            return redirect('/')->with('message', 'Message sent');
        }
        catch (\Exception $ex)
        {
            \Log::error($ex->getMessage());
            return redirect('/')->with('message', 'Error sending message.');
```

```

        }
    }

    public function image_update(Request $request, User $user)
    {
        $image = $request->imgUser;

        if($image->isValid())
        {
            if(File::exists(public_path().'/'.$user->image))
            {
                $defaultImage = public_path().'/images/user/new.jpg';

                if(public_path().'/'.$user->image != $defaultImage)
                {
                    File::delete(public_path().'/'.$user->image);
                }
            }

            $imgFolder = 'images/user/';
            $imgName = time().rand().$image->getClientOriginalName();
            $image->move(public_path().'/'.$imgFolder, $imgName);

            $user->update([
                'image' => $imgFolder.$imgName
            ]);

            session('user')->update([
                'image' => $imgFolder.$imgName
            ]);

            return redirect('/')->with('message', 'Image changed

```

```

successfully.');
```

```

    }

    return redirect('/');
}
}

```

## 6.1.2. MyAuth

### 6.1.2.1. LoginController.php

```

<?php

namespace App\Http\Controllers\MyAuth;

use App\Http\Controllers\Controller;
use App\User;
use Illuminate\Http\Request;

class LoginController extends Controller
{
    public function login(Request $request, User $user)
    {
        $email = $request->logEmail;
        $passwd = $request->logPasswd;

        $existingUser = $user->loginCheck($email, $passwd);

        if($existingUser)
        {
            $request->session()->put('user', $existingUser);
            \Log::info(session('user')->first_name.' '.session('user')->last_name.' logged in.');
```

```

            return $existingUser->role->name == 'admin' ? redirect()->back()->with('message', 'Welcome, admin.') : redirect()->back()->with('message', 'Login successful.');
```

```

        }
        else
        {
            return redirect('/')->with('message', 'Wrong username or password.');
```

```

        }
    }

    public function logout()
    {
        \Log::info(session('user')->first_name.' '.session('user')->last_name.' logged out.');
```

```

        session()->forget('user');
        return redirect('/');
    }
}

```

### 6.1.2.2. RegisterController.php

```
<?php

namespace App\Http\Controllers\Auth;

use App\Http\Controllers\Controller;
use App\Http\Requests\RegisterRequest;
use App\User;
use Illuminate\Http\Request;

class RegisterController extends Controller
{
    public function register(RegisterRequest $request)
    {
        try
        {
            $user = User::create([
                'first_name' => $request->regFN,
                'last_name' => $request->regLN,
                'email' => $request->email,
                'password' => md5($request->regPasswd),
                'image' => 'images/user/new.jpg',
                'role_id' => 2,
                'remember_token' => md5(time().$request->email),
                'email_verified_at' => date('Y-d-m H:i:s')
            ]);

            // if($user)
            // {
            //     $activation_link = url('/register')..'/'.$user->remember_token;

            //     $subject = 'EnergyFitness - Activation';
            //     $headers = 'From: EnergyFitness e.fitns@gmail.com';

            //     mail($user->email, $subject, $activation_link, $headers);

            //     \Log::info($user->first_name.' '.$user->last_name.' registered, activation link was sent.');
```

```
            //
            //     return redirect('/')->with('message', 'Activation link sent, check your e-mail.');
```

```
            // }

            \Log::info($user->first_name.' '.$user->last_name.' registered.');
```

```
            return redirect('/')->with('message', 'Registration successful.');
```

```
        }
        catch (\Exception $ex)
        {
            \Log::error($ex->getMessage());
        }
    }
}
```

```

        return redirect('/')->with('message', 'Something went wrong,
try again later.');
```

```

    }
}

public function activate(Request $request)
{
    $user = User::where('remember_token', $request->remember_token)
        ->update([
            'email_verified_at' => date('Y-d-m H:i:s')
        ]);

    if($user)
    {
        return redirect('/')->with('message', 'E-mail verified
successfully.');
```

```

    }
    else
    {
        return redirect('/')->with('message', 'Verification problem.');
```

```

    }
}
}

```

### 6.1.3. Resource

#### 6.1.3.1. CommentController.php

```

<?php

namespace App\Http\Controllers\Resource;

use App\Http\Controllers\Controller;
use App\Http\Requests\CommentRequest;
use App\Comment;
use App\Post;

class CommentController extends Controller
{
    public function index(Post $post)
    {
        $comments = $post->comments;
        foreach ($comments as $comment)
        {
            echo $comment->content;
        }
    }

    public function create()
    {
        //
    }
}

```



```

public function store(CommentRequest $request)
{
    try
    {
        Comment::create([
            'content' => $request->input('content'),
            'post_id' => $request->post_id,
            'user_id' => $request->user_id
        ]);

        \Log::info($request->userFN.' '.$request->userLN.' commented on
'.$request->postTitle.': '.$request->input('content'));
    }
    catch (\Exception $ex)
    {
        \Log::error($ex->getMessage());
    }
}

public function show()
{
    //
}

public function edit()
{
    //
}

public function update(CommentRequest $request)
{
    try
    {
        Comment::where('id', $request->id)
            ->update([
                'content' => $request->input('content'),
            ]);

        \Log::info($request->userFN.' '.$request->userLN.' updated a
comment on '.$request->postTitle.': '.$request->input('content'));
    }
    catch (\Exception $ex)
    {
        \Log::error($ex->getMessage());
    }
}

public function destroy()
{
    $request = request();
    \Log::warning($request->userFN.' '.$request->userLN.' deleted a

```

```

comment on '.$request->postTitle.': '.$request->commentContent);
    Comment::where(request(['id', 'post_id', 'user_id']))->delete();
}
}

```

### 6.1.3.2. MenuController.php

```

<?php

namespace App\Http\Controllers\Resource;

use App\Http\Controllers\Controller;
use App\Http\Requests\MenuRequest;
use App\Menu;

class MenuController extends Controller
{
    public function index()
    {
        $menus = Menu::orderBy('position')->get();
        return view('admin.pages.menus.index', compact('menus'));
    }

    public function create()
    {
        return view('admin.pages.menus.create');
    }

    public function store(MenuRequest $request)
    {
        Menu::create([
            'position' => $request->position,
            'name' => $request->name,
            'route' => $request->route,
        ]);

        return redirect('/admin/menus');
    }

    public function show(Menu $menu)
    {
        //
    }

    public function edit(Menu $menu)
    {
        return view('admin.pages.menus.edit', compact('menu'));
    }

    public function update(MenuRequest $request, Menu $menu)

```

```

{
    $menu->update([
        'position' => $request->position,
        'name' => $request->name,
        'route' => $request->route,
    ]);

    return redirect('/admin/menus');
}

public function destroy()
{
    Menu::where(request(['id']))->delete();
}
}

```

### 6.1.3.3. PostController.php

```

<?php

namespace App\Http\Controllers\Resource;

use App\Http\Controllers\Controller;
use App\Http\Requests\PostRequest;
use App\Post;
use App\Social;
use Illuminate\Support\Facades\File;

class PostController extends Controller
{
    public function index()
    {
        $posts = Post::latest('id')->paginate(2);
        return view('admin.pages.posts.index', compact('posts'));
    }

    public function create()
    {
        return view('admin.pages.posts.create');
    }

    public function store(PostRequest $request)
    {
        $image = $request->image;

        if($image->isValid())
        {
            $imgFolder = 'images/post/';
            $imgName = time().rand().$image->getClientOriginalName();
            $image->move(public_path().'/'.$imgFolder, $imgName);

            Post::create([

```

```

        'title' => $request->title,
        'content' => $request->contentP,
        'user_id' => $request->user_id,
        'image' => $imgFolder.$imgName
    ]);
}

return redirect('/admin/posts');
}

public function show(Post $post)
{
    $socials = Social::whereNull('trainer_id')->get();
    return view('front.pages.post', compact('post', 'socials'));
}

public function edit(Post $post)
{
    return view('admin.pages.posts.edit', compact('post'));
}

public function update(PostRequest $request, Post $post)
{
    $image = $request->image;

    if($image->isValid())
    {
        if(File::exists(public_path().'/'.$post->image))
        {
            File::delete(public_path().'/'.$post->image);
        }

        $imgFolder = 'images/post/';
        $imgName = time().rand().$image->getClientOriginalName();
        $image->move(public_path().'/'.$imgFolder, $imgName);

        $post->update([
            'title' => $request->title,
            'content' => $request->contentP,
            'user_id' => $request->user_id,
            'image' => $imgFolder.$imgName
        ]);
    }

    return redirect('/admin/posts');
}

public function destroy(Post $post)
{
    if(File::exists(public_path().'/'.$post->image))
    {
        File::delete(public_path().'/'.$post->image);
    }
}

```

```

        Post::where(request(['id']))->delete();
    }
}

```

#### 6.1.3.4. PriceController.php

```

<?php

namespace App\Http\Controllers\Resource;

use App\Http\Controllers\Controller;
use App\Http\Requests\PriceRequest;
use App\Price;

class PriceController extends Controller
{
    public function index()
    {
        $prices = Price::orderBy('amount')->get();
        return view('admin.pages.prices.index', compact('prices'));
    }

    public function create()
    {
        return view('admin.pages.prices.create');
    }

    public function store(PriceRequest $request)
    {
        Price::create([
            'title' => $request->title,
            'amount' => $request->amount
        ]);

        return redirect('/admin/prices');
    }

    public function show(Price $price)
    {
        //
    }

    public function edit(Price $price)
    {
        return view('admin.pages.prices.edit', compact('price'));
    }

    public function update(PriceRequest $request, Price $price)
    {

```

```

        $price->update([
            'title' => $request->title,
            'amount' => $request->amount
        ]);

        return redirect('/admin/prices');
    }

    public function destroy()
    {
        Price::where(request(['id']))->delete();
    }
}

```

#### 6.1.3.5. ServiceController.php

```

<?php

namespace App\Http\Controllers\Resource;

use App\Http\Controllers\Controller;
use App\Http\Requests\ServiceRequest;
use App\Price;
use App\Service;

class ServiceController extends Controller
{
    public function index()
    {
        $services = Service::latest('id')->paginate(5);
        return view('admin.pages.services.index', compact('services'));
    }

    public function create()
    {
        $prices = Price::all();
        return view('admin.pages.services.create', compact('prices'));
    }

    public function store(ServiceRequest $request)
    {
        Service::create([
            'name' => $request->name,
            'price_id' => $request->price_id
        ]);

        return redirect('/admin/services');
    }

    public function show(Service $service)
    {

```

```

    //
}

public function edit(Service $service)
{
    $prices = Price::all();
    return view('admin.pages.services.edit', compact('service',
'prices'));
}

public function update(ServiceRequest $request, Service $service)
{
    $service->update([
        'name' => $request->name,
        'price_id' => $request->price_id
    ]);

    return redirect('/admin/services');
}

public function destroy()
{
    Service::where(request(['id']))->delete();
}
}

```

#### 6.1.3.6. SliderController.php

```

<?php

namespace App\Http\Controllers\Resource;

use App\Http\Controllers\Controller;
use App\Http\Requests\SliderRequest;
use App\Slider;
use Illuminate\Support\Facades\File;

class SliderController extends Controller
{
    public function index()
    {
        $sliders = Slider::orderBy('position')->get();
        return view ('admin.pages.sliders.index', compact('sliders'));
    }

    public function create()
    {
        return view('admin.pages.sliders.create');
    }
}

```

```

public function store(SliderRequest $request)
{
    $image = $request->image;

    if($image->isValid())
    {
        $imgFolder = 'images/slider/';
        $imgName = time().rand().$image->getClientOriginalName();
        $image->move(public_path().'/'.$imgFolder, $imgName);

        Slider::create([
            'position' => $request->position,
            'image' => $imgFolder.$imgName
        ]);
    }

    return redirect('/admin/sliders');
}

public function show(Slider $slider)
{
    //
}

public function edit(Slider $slider)
{
    return view('admin.pages.sliders.edit', compact('slider'));
}

public function update(SliderRequest $request, Slider $slider)
{
    $image = $request->image;

    if($image->isValid())
    {
        if(File::exists(public_path().'/'.$slider->image))
        {
            File::delete(public_path().'/'.$slider->image);
        }

        $imgFolder = 'images/slider/';
        $imgName = time().rand().$image->getClientOriginalName();
        $image->move(public_path().'/'.$imgFolder, $imgName);

        $slider->update([
            'position' => $request->position,
            'image' => $imgFolder.$imgName
        ]);
    }

    return redirect('/admin/sliders');
}

```



```

public function destroy(Slider $slider)
{
    if(File::exists(public_path().'/'.$slider->image))
    {
        File::delete(public_path().'/'.$slider->image);
    }

    Slider::where(request(['id']))->delete();
}
}

```

#### 6.1.3.7. SocialController.php

```

<?php

namespace App\Http\Controllers\Resource;

use App\Http\Controllers\Controller;
use App\Http\Requests\SocialRequest;
use App\Social;
use App\Trainer;

class SocialController extends Controller
{
    public function index()
    {
        $socials = Social::all();
        return view('admin.pages.socials.index', compact('socials'));
    }

    public function create()
    {
        $trainers = Trainer::all();
        return view('admin.pages.socials.create', compact('trainers'));
    }

    public function store(SocialRequest $request)
    {
        Social::create([
            'name' => $request->name,
            'url' => $request->url,
            'icon' => strtolower($request->icon),
            'trainer_id' => $request->trainer_id
        ]);

        return redirect('/admin/socials');
    }

    public function show(Social $social)
    {
        //
    }
}

```

```

    public function edit(Social $social)
    {
        $trainers = Trainer::all();
        return view('admin.pages.socials.edit', compact('social',
'trainers'));
    }

    public function update(SocialRequest $request, Social $social)
    {
        $social->update([
            'name' => $request->name,
            'url' => $request->url,
            'icon' => strtolower($request->icon),
            'trainer_id' => $request->trainer_id
        ]);

        return redirect('/admin/socials');
    }

    public function destroy()
    {
        Social::where(request(['id']))->delete();
    }
}

```

#### 6.1.3.8. TrainerController.php

```

<?php

namespace App\Http\Controllers\Resource;

use App\Http\Controllers\Controller;
use App\Http\Requests\TrainerRequest;
use App\Trainer;
use Illuminate\Support\Facades\File;

class TrainerController extends Controller
{
    public function index()
    {
        $trainers = Trainer::all();
        return view('admin.pages.trainers.index', compact('trainers'));
    }

    public function create()
    {
        return view('admin.pages.trainers.create');
    }
}

```

```

public function store(TrainerRequest $request)
{
    $image = $request->image;

    if($image->isValid())
    {
        $imgFolder = 'images/trainer/';
        $imgName = time().rand().$image->getClientOriginalName();
        $image->move(public_path().'/'.$imgFolder, $imgName);

        Trainer::create([
            'name' => $request->name,
            'workout' => $request->workout,
            'description' => $request->description,
            'image' => $imgFolder.$imgName
        ]);
    }

    return redirect('/admin/trainers');
}

public function show(Trainer $trainer)
{
    //
}

public function edit(Trainer $trainer)
{
    return view('admin.pages.trainers.edit', compact('trainer'));
}

public function update(TrainerRequest $request, Trainer $trainer)
{
    $image = $request->image;

    if($image->isValid())
    {
        if(File::exists(public_path().'/'.$trainer->image))
        {
            File::delete(public_path().'/'.$trainer->image);
        }

        $imgFolder = 'images/trainer/';
        $imgName = time().rand().$image->getClientOriginalName();
        $image->move(public_path().'/'.$imgFolder, $imgName);

        $trainer->update([
            'name' => $request->name,
            'workout' => $request->workout,
            'description' => $request->description,
            'image' => $imgFolder.$imgName
        ]);
    }
}

```

```

        return redirect('/admin/trainers');
    }

    public function destroy(Trainer $trainer)
    {
        if(File::exists(public_path().'/'.$trainer->image))
        {
            File::delete(public_path().'/'.$trainer->image);
        }

        Trainer::where(request(['id']))->delete();
    }
}

```

#### 6.1.3.9. UserController.php

```

<?php

namespace App\Http\Controllers\Resource;

use App\Http\Controllers\Controller;
use App\Http\Requests\UserRequest;
use App\User;
use Illuminate\Support\Facades\File;

class UserController extends Controller
{
    public function index()
    {
        $users = User::all();
        return view('admin.pages.users.index', compact('users'));
    }

    public function create()
    {
        return view('admin.pages.users.create');
    }

    public function store(UserRequest $request)
    {
        $password = md5($request->password);
        $image = $request->image;

        if($image->isValid())
        {
            $imgFolder = 'images/user/';
            $imgName = time().rand().$image->getClientOriginalName();
            $image->move(public_path().'/'.$imgFolder, $imgName);

            User::create([
                'first_name' => $request->first_name,
                'last_name' => $request->last_name,

```

```

        'email' => $request->email,
        'password' => $password,
        'role_id' => $request->role_id,
        'email_verified_at' => $request->email_verified_at,
        'image' => $imgFolder.$imgName
    ]);

    return redirect('/admin/users');
}
}

public function show($id)
{
    //
}

public function edit(User $user)
{
    return view('admin.pages.users.edit', compact('user'));
}

public function update(UserRequest $request, User $user)
{
    $image = $request->image;

    if($image)
    {
        if($image->isValid())
        {
            if(File::exists(public_path().'/'.$user->image))
            {
                $defaultImage = public_path().'/images/user/new.jpg';

                if(public_path().'/'.$user->image != $defaultImage)
                {
                    File::delete(public_path().'/'.$user->image);
                }
            }

            $imgFolder = 'images/user/';
            $imgName = time().rand().$image->getClientOriginalName();
            $image->move(public_path().'/'.$imgFolder, $imgName);

            $user->update([
                'first_name' => $request->first_name,
                'last_name' => $request->last_name,
                'email' => $request->email,
                'role_id' => $request->role_id,
                'email_verified_at' => $request->email_verified_at,
                'image' => $imgFolder.$imgName
            ]);
        }
    }
    else

```

```

        {
            $user->update([
                'first_name' => $request->first_name,
                'last_name' => $request->last_name,
                'email' => $request->email,
                'role_id' => $request->role_id,
                'email_verified_at' => $request->email_verified_at
            ]);
        }

        return redirect('/admin/users');
    }

    public function destroy(User $user)
    {
        if(File::exists(public_path().'/'.$user->image))
        {
            $defaultImage = public_path().'/images/user/new.jpg';

            if(public_path().'/'.$user->image != $defaultImage)
            {
                File::delete(public_path().'/'.$user->image);
            }
        }

        User::where(request(['id']))->delete();
    }
}

```

## 6.2. Middleware

### 6.2.1. Admin.php

```

<?php

namespace App\Http\Middleware;

use Closure;

class Admin
{
    public function handle($request, Closure $next)
    {
        if (session()->has('user')) {
            if (session()->get('user')->role->name == 'admin') {
                return $next($request);
            }
        }
        return abort(403);
    }
}

```

## 6.3. Requests

### 6.3.1. CommentRequest.php

```
<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class CommentRequest extends FormRequest
{
    public function authorize()
    {
        return true;
    }

    public function rules()
    {
        return [
            'content' => 'required|min:2',
            'post_id' => 'required',
            'user_id' => 'required'
        ];
    }

    public function messages()
    {
        return [
            'content.required' => 'Can\'t post an empty comment.',
            'content.min' => 'Comment must contain at least 2 characters.'
        ];
    }
}
```

### 6.3.2. MenuRequest.php

```
<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class MenuRequest extends FormRequest
{
    public function authorize()
    {
        return true;
    }

    public function rules()
    {
```

```

        return [
            'position' => 'required|numeric|unique:menus',
            'name' => 'required',
            'route' => 'required'
        ];
    }
}

```

### 6.3.3. PostRequest.php

```

<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class PostRequest extends FormRequest
{
    public function authorize()
    {
        return true;
    }

    public function rules()
    {
        return [
            'title' => 'required|alpha_num|min:3|max:100',
            'contentP' => 'required',
            'user_id' => 'numeric',
            'image' => 'required|image|max:2000'
        ];
    }

    public function messages()
    {
        return [
            'contentP.required' => 'Content is required.'
        ];
    }
}

```

### 6.3.4. PriceRequest.php

```

<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class PriceRequest extends FormRequest
{
    public function authorize()

```



```

    {
        return true;
    }

    public function rules()
    {
        return [
            'title' => 'required',
            'amount' => 'required|numeric'
        ];
    }
}

```

### 6.3.5. ServiceRequest.php

```

<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class ServiceRequest extends FormRequest
{
    public function authorize()
    {
        return true;
    }

    public function rules()
    {
        return [
            'name' => 'required|min:2',
            'price_id' => 'required|numeric|not_in:0'
        ];
    }

    public function messages()
    {
        return [
            'price_id.not_in' => 'You must select a price category.'
        ];
    }
}

```

### 6.3.6. SliderRequest.php

```

<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

```

```

class SliderRequest extends FormRequest
{
    public function authorize()
    {
        return true;
    }

    public function rules()
    {
        return [
            'position' => 'required|numeric|unique:sliders',
            'image' => 'required|image|mimes:jpeg,png,jpg|max:2000'
        ];
    }
}

```

### 6.3.7. SocialRequest.php

```

<?php
namespace App\Http\Requests;
use Illuminate\Foundation\Http\FormRequest;
class SocialRequest extends FormRequest
{
    public function authorize()
    {
        return true;
    }

    public function rules()
    {
        return [
            'name' => 'required|min:3',
            'url' => 'required|url',
            'icon' => 'required|min:2',
            'trainer_id' => 'nullable|numeric'
        ];
    }
}

```

### 6.3.8. TrainerRequest.php

```

<?php
namespace App\Http\Requests;
use Illuminate\Foundation\Http\FormRequest;
class TrainerRequest extends FormRequest
{

```

```

    public function authorize()
    {
        return true;
    }

    public function rules()
    {
        return [
            'name' => 'required|alpha|min:3',
            'workout' => 'required|min:3',
            'description' => 'required|min:3',
            'image' =>
'required|image|max:2000|dimensions:width=474,height=592'
        ];
    }
}

```

### 6.3.9. UserRequest.php

```

<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class UserRequest extends FormRequest
{
    public function authorize()
    {
        return true;
    }

    public function rules()
    {
        return [
            'first_name' => 'required|alpha|min:2|max:20',
            'last_name' => 'required|alpha|min:2|max:20',
            'email' => 'required|email|unique:users',
            'email_verified_at' => 'date_format:Y-m-d H:i:s',
            'role_id' => 'required|numeric',
            'image' => 'image|max:2000|dimensions:ratio=1/1',
            'password' => [
                'min:6',
                'regex:/^(?=.*[a-z])(?=.*[A-Z])(?=.*\d)[a-zA-Z\d]{6,}$/'
            ]
        ];
    }

    public function messages()
    {
        return [
            'first_name.alpha' => 'First name must contain only letters.',
            'first_name.min' => 'First name must contain at least 2 letters.',
            'first_name.max' => 'First name can contain maximum 20 letters.',
            'last_name.alpha' => 'Last name must contain only letters.',

```

```

        'last_name.min' => 'Last name must contain at least 2 letters.',
        'last_name.max' => 'Last name can contain maximum 20 letters.',
        'email.email' => 'Invalid e-mail format.',
        'email.unique:users' => 'This e-mail already exists.',
        'password.min' => 'Password must contain at least 6 characters',
        'password.regex' => 'Password must contain one uppercase letter
and one number.',
        'role_id.required' => 'A role must be selected.'
    ];
}
}

```

### 6.3.10. ContactRequest.php

```

<?php

namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class ContactRequest extends FormRequest
{
    public function authorize()
    {
        return true;
    }

    public function rules()
    {
        return [
            'conName' => 'required|alpha',
            'conEmail' => 'required|email',
            'conSubject' => 'required|min:3',
            'conMsg' => 'required|min:3'
        ];
    }

    public function messages()
    {
        return [
            'conName.required' => 'Name is required.',
            'conName.alpha' => 'Name can\'t contain numbers.',
            'conEmail.required' => 'E-mail is required.',
            'conEmail.email' => 'Wrong e-mail format.',
            'conSubject.required' => 'Subject is required.',
            'conSubject.min' => 'Subject must have at least 3 characters.',
            'conMsg.required' => 'Message is required.',
            'conMsg.min' => 'Message must have at least 3 characters.',
        ];
    }
}

```

### 6.3.11. RegisterRequest.php

```
<?php
namespace App\Http\Requests;

use Illuminate\Foundation\Http\FormRequest;

class RegisterRequest extends FormRequest
{
    public function authorize()
    {
        return true;
    }

    public function rules()
    {
        return [
            'regFN' => 'required|alpha|min:2|max:20',
            'regLN' => 'required|alpha|min:2|max:20',
            'email' => 'required|email|unique:users',
            'regPasswd' => [
                'required',
                'min:6',
                'regex:/^(?=.*[a-z])(?=.*[A-Z])(?=.*\d)[a-zA-Z\d]{6,}$/'
            ]
        ];
    }

    public function messages()
    {
        return [
            'regFN.alpha' => 'First name must contain only letters.',
            'regFN.min' => 'First name must contain at least 2 letters.',
            'regFN.max' => 'First name can contain maximum 20 letters.',
            'regLN.alpha' => 'Last name must contain only letters.',
            'regLN.min' => 'Last name must contain at least 2 letters.',
            'regLN.max' => 'Last name can contain maximum 20 letters.',
            'email.email' => 'Invalid e-mail format.',
            'email.unique:users' => 'This e-mail already exists.',
            'regPasswd.min' => 'Password must contain at least 6 characters',
            'regPasswd.regex' => 'Password must contain one uppercase letter
and one number.'
        ];
    }
}
```

## 6.4. Models

### 6.4.1. Comment.php

```

<?php

namespace App;

use Illuminate\Database\Eloquent\Model;

class Comment extends Model
{
    protected $guarded = [];

    public function user()
    {
        return $this->belongsTo('App\User');
    }
}

```

#### 6.4.2. Menu.php

```

<?php

namespace App;

use Illuminate\Database\Eloquent\Model;

class Menu extends Model
{
    protected $guarded = [];
}

```

#### 6.4.3. Post.php

```

<?php

namespace App;

use Illuminate\Database\Eloquent\Model;

class Post extends Model
{
    protected $guarded = [];

    public function user()
    {
        return $this->belongsTo('App\User');
    }

    public function comments()
    {
        return $this->hasMany('App\Comment');
    }
}

```

#### 6.4.4. Price.php

```
<?php
namespace App;

use Illuminate\Database\Eloquent\Model;

class Price extends Model
{
    protected $guarded = [];

    public function services()
    {
        return $this->hasMany('App\Service');
    }
}
```

#### 6.4.5. Service.php

```
<?php
namespace App;

use Illuminate\Database\Eloquent\Model;

class Service extends Model
{
    protected $guarded = [];

    public function price()
    {
        return $this->belongsTo('App\Price');
    }
}
```

#### 6.4.6. Slider.php

```
<?php
namespace App;

use Illuminate\Database\Eloquent\Model;

class Slider extends Model
{
    protected $guarded = [];
}
```

#### 6.4.7. Social.php

```
<?php
namespace App;

use Illuminate\Database\Eloquent\Model;

class Social extends Model
{
    protected $guarded = [];

    public function trainer()
    {
        return $this->belongsTo('App\Trainer');
    }
}
```

#### 6.4.8. Trainer.php

```
<?php
namespace App;

use Illuminate\Database\Eloquent\Model;

class Trainer extends Model
{
    protected $guarded = [];

    public function socials()
    {
        return $this->hasMany('App\Social');
    }
}
```

#### 6.4.9. User.php

```
<?php
namespace App;

use Illuminate\Foundation\Auth\User as Authenticatable;

class User extends Authenticatable
{
    protected $guarded = [];

    public function loginCheck($email, $passwd)
    {
        return User::where([
```



```

        'email' => $email,
        'password' => md5($passwd)
    ]->whereNotNull('email_verified_at')
    ->first();
}

public function role()
{
    return $this->belongsTo('App\Role');
}

public function comments()
{
    return $this->hasMany('App\Comment');
}

public function posts()
{
    return $this->hasMany('App\Post');
}
}

```

#### 6.4.10. Role.php

```

<?php

namespace App;

use Illuminate\Database\Eloquent\Model;

class Role extends Model
{
    //
}

```

### 6.5. Views

#### 6.5.1. admin

##### 6.5.1.1. pages

##### 6.5.1.1.1. home.blade.php

```

@extends('layouts.admin')

@section('content')
    @include('admin.partials.home.db_info')
@endsection

```

### 6.5.1.1.2. menus

#### 6.5.1.1.2.1. create.blade.php

```
@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">link</i> Menu links<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Creating menu links</small>
@endsection

@section('content')

    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
                @endisset

                <p class="lead">Create a menu link</p>
                <form action="{{ url('/admin/menus') }}" method="POST">
                    @csrf
                    <div class="form-group">
                        <div class="form-line">
                            <input name="position" id="position" type="number"
class="form-control" placeholder="Position" required />
                        </div>
                    </div>
                    <div class="form-group">
                        <div class="form-line">
                            <input name="name" id="name" type="text"
class="form-control" placeholder="Name" required />
                        </div>
                    </div>
                    <div class="form-group">
                        <div class="form-line">
                            <input name="route" id="route" type="text"
class="form-control" placeholder="Route" required />
                        </div>
                    </div>
                    <div class="form-group">
                        <button type="submit" name="menuBtn" id="menuBtn"
class="btn btn-primary waves-effect waves-light">Create</button>
                        <a href="{{ url('/admin/menus') }}" class="btn waves-
```

```

effect">Cancel</a>
        </div>
    </form>
</div>
</div>
</div>
</div>
@endsection

```

#### 6.5.1.1.2.2. edit.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">link</i> Menu links<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Editing menu links</small>
@endsection

@section('content')

    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
                @endisset

                <p class="lead">Edit a menu link</p>
                <form action="{{ url('/admin/menus/' . $menu->id) }}"
method="POST">
                    @method('PATCH')
                    @csrf
                    <div class="form-group">
                        <div class="form-line">
                            <input name="position" id="position" type="number"
class="form-control" placeholder="Position" required value="{{ $menu->position
}}"/>
                        </div>
                    </div>
                    <div class="form-group">
                        <div class="form-line">
                            <input name="name" id="name" type="text"
class="form-control" placeholder="Name" required value="{{ $menu->name }}" />
                        </div>
                    </div>
                    <div class="form-group">
                        <div class="form-line">
                            <input name="route" id="route" type="text"

```

```

class="form-control" placeholder="Route" required value="{{ $menu->route }}"
/>
        </div>
    </div>
    <div class="form-group">
        <button type="submit" name="menuBtn" id="menuBtn"
class="btn btn-primary waves-effect waves-light">Edit</button>
        <a href="{{ url('/admin/menus') }}" class="btn waves-
effect">Cancel</a>
    </div>
</form>
</div>
</div>
</div>
</div>
</div>
@endsection

```

#### 6.5.1.1.2.3. index.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">link</i> Menu links<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Showing all menu links</small>
@endsection

@section('content')

    @php($i = 1)

    <div class="table-responsive">
        <table class="table table-striped">
            <thead>
                <tr class="info">
                    <th>Position</th>
                    <th>Name</th>
                    <th>Route</th>
                    <th>Edit</th>
                    <th>Delete</th>
                </tr>
            </thead>
            <tbody>

                @foreach($menus as $menu)

                    <tr>
                        <td>{{ $menu->position }}</td>
                        <td>{{ $menu->name }}</td>
                        <td>{{ $menu->route }}</td>
                        <td><a href="{{ url('/admin/menus/' . $menu->id . '/edit') }}"
class="btn btn-info waves-effect btn-xs"><i class="material-
icons">edit</i></a></td>
                        <td>

```



```

        @isset($errors)
            @foreach($errors->all() as $error)
                <div class="alert alert-warning">
                    {{ $error }}
                </div>
            @endforeach
        @endisset

        <p class="lead">Create a post</p>
        <form action="{{ url('/admin/posts') }}" method="POST"
        enctype="multipart/form-data">
            @csrf
            <div class="form-group">
                <div class="form-line">
                    <input name="title" id="title" type="text"
                    class="form-control" placeholder="Title" required />
                </div>
            </div>
            <div class="form-group">
                <div class="form-line">
                    <textarea name="contentP" id="contentP"
                    class="form-control" placeholder="Content" rows="15" required ></textarea>
                </div>
            </div>
            <div class="form-group">
                <input name="user_id" id="user_id" type="hidden"
                class="form-control" value="{{ session('user')->id }}" />
            </div>
            <div class="form-group">
                <label for="image"><i>Image:</i></label>
                <input type="file" name="image" id="image" required />
                (max. 2MB)
                <br/>
            </div>
            <div class="form-group">
                <button type="submit" name="postBtn" id="postBtn"
                class="btn btn-primary waves-effect waves-light">Create</button>
                <a href="{{ url('/admin/posts') }}" class="btn waves-
                effect">Cancel</a>
            </div>
        </form>
    </div>
</div>
</div>
@endsection

```

#### 6.5.1.1.3.2. edit.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">border_color</i> Posts<a href="{{
    url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
    class="pull-right go_back">Back</i></a>

```

```

    <small>Editing posts</small>
@endsection

@section('content')

    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
                @endisset

                <p class="lead">Edit a post</p>
                <form action="{{ url('/admin/posts/' . $post->id) }}"
method="POST" enctype="multipart/form-data">
                    @method('PATCH')
                    @csrf
                    <div class="form-group">
                        <div class="form-line">
                            <input name="title" id="title" type="text"
class="form-control" placeholder="Title" required value="{{ $post->title }}"
/>
                        </div>
                    </div>
                    <div class="form-group">
                        <div class="form-line">
                            <textarea name="contentP" id="contentP"
class="form-control" placeholder="Content" rows="15" required >{{ $post-
>content }}</textarea>
                        </div>
                    </div>
                    <div class="form-group">
                        <input name="user_id" id="user_id" type="hidden"
class="form-control" value="{{ session('user')->id }}" />
                    </div>
                    <div class="form-group">
                        
                    </div>
                    <div class="form-group">
                        <label for="image"><i>Image:</i></label>
                        <input type="file" name="image" id="image" required />
                        (max. 2MB)
                        <br/>
                    </div>
                    <div class="form-group">
                        <button type="submit" name="postBtn" id="postBtn"
class="btn btn-primary waves-effect waves-light">Edit</button>
                        <a href="{{ url('/admin/posts') }}" class="btn waves-
effect">Cancel</a>
                    </div>
                </form>
            </div>
        </div>
    </div>

```

```

        </div>
    </div>
</div>

@endsection

```

### 6.5.1.1.3.3. index.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">border_color</i> Posts<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Showing all posts</small>
@endsection

@section('content')

    @php($i = 1)

    <br/>

    @foreach($posts as $post)

        <div class="container-fluid">
            <div class="row">
                <div class="col-lg-12 col-md-12 col-sm-12 col-xs-12">
                    <div class="card">
                        <div class="header">
                            <h2>
                                {{ $post->title }}
                            </h2>
                            <ul class="header-dropdown m-r--5">
                                <li class="dropdown">
                                    <a href="javascript:void(0);" class="dropdown-
toggle" data-toggle="dropdown" role="button" aria-haspopup="true" aria-
expanded="false">
                                        <i class="material-icons">more_vert</i>
                                    </a>
                                    <ul class="dropdown-menu pull-right">
                                        <li><a href="{{ url('/admin/posts/' . $post-
>id . '/edit') }}">Edit</a></li>
                                        <li><a href="#" data-toggle="modal" data-
target="#delete-modal{{ $i }}">Delete</a></li>
                                    </ul>
                                    <div class="modal fade" id="delete-modal{{
$i++ }}" role="dialog">
                                        <div class="modal-dialog modal-sm text-
center">
                                            <div class="modal-content">
                                                <div class="modal-body">
                                                    <button type="button"
class="close" data-dismiss="modal">
                                                        &times;

```



```

                </button>
                <h4>Are you sure?</h4>
                <button type="button"
class="btn btn-default error" onclick="deletion({{ $post->id }}, '{{ $post-
>getTable() }}')";">
                    Delete
                </button>
            </div>
        </div>
    </div>
</li>
</ul>
</div>
<div class="body">
    <ul class="nav nav-tabs tab-nav-right" role="tablist">
        <li role="presentation" class="active"><a
href="#{{ $post->id }}c" data-toggle="tab">Content</a></li>
        <li role="presentation"><a href="#{{ $post->id
}}s" data-toggle="tab">Image</a></li>
    </ul>
    <div class="tab-content">
        <div role="tabpanel" class="tab-pane fade in
active" id="{{ $post->id }}c">
            <p>
                {{ $post->content }}
            </p>
        </div>
        <div role="tabpanel" class="tab-pane fade" id="{{
$post->id }}s">
            
        </div>
    </div>
</div>
</div>
</div>
</div>
</div>
<div class="text-center">{{ $posts->links() }}</div>
@endforeach
@endsection

```

#### 6.5.1.1.4. prices

##### 6.5.1.1.4.1. create.blade.php

```

@extends('layouts.admin')

@section('header')

```

```

        <i class="material-icons icon_left">euro_symbol</i> Prices<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
        <small>Creating prices</small>
@endsection

@section('content')

    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
                @endisset

                <p class="lead">Create a price</p>
                <form action="{{ url('/admin/prices') }}" method="POST">
                    @csrf
                    <div class="form-group">
                        <div class="form-line">
                            <input name="title" id="title" type="text"
class="form-control" placeholder="Title" required />
                        </div>
                    </div>
                    <div class="form-group">
                        <div class="form-line">
                            <input name="amount" id="amount" type="number"
class="form-control" placeholder="Amount" required />
                        </div>
                    </div>
                    <div class="form-group">
                        <button type="submit" name="priceBtn" id="priceBtn"
class="btn btn-primary waves-effect waves-light">Create</button>
                        <a href="{{ url('/admin/prices') }}" class="btn waves-
effect">Cancel</a>
                    </div>
                </form>
            </div>
        </div>
    </div>
</div>

@endsection

```

#### 6.5.1.1.4.2. edit.blade.php

```

        @extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">euro_symbol</i> Prices<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i

```

```

class="pull-right go_back">Back</i></a>
    <small>Editing prices</small>
@endsection

@section('content')

    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
                @endisset

                <p class="lead">Edit a price</p>
                <form action="{{ url('/admin/prices/' . $price->id) }}"
method="POST">
                    @method('PATCH')
                    @csrf
                    <div class="form-group">
                        <div class="form-line">
                            <input name="title" id="title" type="text"
class="form-control" placeholder="Title" required value="{{ $price->title }}"
/>
                        </div>
                    </div>
                    <div class="form-group">
                        <div class="form-line">
                            <input name="amount" id="amount" type="number"
class="form-control" placeholder="Amount" required value="{{ $price->amount
}}" />
                        </div>
                    </div>
                    <div class="form-group">
                        <button type="submit" name="priceBtn" id="priceBtn"
class="btn btn-primary waves-effect waves-light">Edit</button>
                        <a href="{{ url('/admin/prices') }}" class="btn waves-
effect">Cancel</a>
                    </div>
                </form>
            </div>
        </div>
    </div>
@endsection

```

#### 6.5.1.1.4.3. index.blade.php

```

@extends('layouts.admin')

@section('header')

```

```

        <i class="material-icons icon_left">euro_symbol</i> Prices<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
        <small>Showing all prices</small>
    @endsection

@section('content')

    @php($i = 1)

    <div class="table-responsive">
        <table class="table table-striped">
            <thead>
                <tr class="info">
                    <th>Title</th>
                    <th>Amount</th>
                    <th>Edit</th>
                    <th>Delete</th>
                </tr>
            </thead>
            <tbody>

                @foreach($prices as $price)

                    <tr>
                        <td>{{ $price->title }}</td>
                        <td>${{ $price->amount }}</td>
                        <td><a href="{{ url('/admin/prices/' . $price->id . '/edit')
}}" class="btn btn-info waves-effect btn-xs"><i class="material-
icons">edit</i></a></td>
                        <td>
                            <a class="btn btn-danger waves-effect btn-xs" href="#"
data-toggle="modal" data-target="#delete-modal{{ $i }}">
                                <i class="material-icons">delete_forever</i>
                            </a>
                            <div class="modal fade" id="delete-modal{{ $i++ }}"
role="dialog">
                                <div class="modal-dialog modal-sm text-center">
                                    <div class="modal-content">
                                        <div class="modal-body">
                                            <button type="button" class="close"
data-dismiss="modal">
                                                &times;
                                            </button>
                                            <h4>Are you sure?</h4>
                                            <button type="button" class="btn btn-
default error" onclick="deletion({{ $price->id }}, '{{ $price->getTable()
}}')";">
                                                Delete
                                            </button>
                                        </div>
                                    </div>
                                </div>
                            </div>
                        </td>
                    </tr>
                @endforeach
            </tbody>
        </table>
    </div>

```

```

        @endforeach

    </tbody>
</table>
</div>

@endsection

```

#### 6.5.1.1.5. services

##### 6.5.1.1.5.1. create.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">group_work</i> Services<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Creating services</small>
@endsection

@section('content')

    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
                @endisset

                <p class="lead">Create a service</p>
                <form action="{{ url('/admin/services') }}" method="POST">
                    @csrf
                    <div class="form-group">
                        <div class="form-line">
                            <input name="name" id="name" type="text"
class="form-control" placeholder="Name" required />
                        </div>
                    </div>
                    <div class="form-group">
                        <select name="price_id" id="price_id">
                            <option value="0">Select a price
category...</option>

                                @foreach($prices as $price)
                                    <option value="{{ $price->id }}">{{ $price-
>amount }}</option>
                                @endforeach

```

```

        </select>
    </div>
    <div class="form-group">
        <button type="submit" name="serviceBtn"
id="serviceBtn" class="btn btn-primary waves-effect waves-
light">Create</button>
        <a href="{{ url('/admin/services') }}" class="btn
waves-effect">Cancel</a>
    </div>
</form>
</div>
</div>
</div>
</div>
@endsection

```

#### 6.5.1.1.5.2. edit.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">group_work</i> Services<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Editing services</small>
@endsection

@section('content')

    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
                @endisset

                <p class="lead">Edit a service</p>
                <form action="{{ url('/admin/services/' . $service->id) }}"
method="POST">

                    @method('PATCH')
                    @csrf
                    <div class="form-group">
                        <div class="form-line">
                            <input name="name" id="name" type="text"
class="form-control" placeholder="Name" required value="{{ $service->name }}"
/>
                        </div>
                    </div>
                    <div class="form-group">

```

```

        <select name="price_id" id="price_id">
            <option value="{{ $service->price->id }}">${{
$service->price->amount }}</option>

            @foreach($prices as $price)
                <option value="{{ $price->id }}">${{ $price-
>amount }}</option>
            @endforeach
        </select>
    </div>
    <div class="form-group">
        <button type="submit" name="serviceBtn"
id="serviceBtn" class="btn btn-primary waves-effect waves-light">Edit</button>
        <a href="{{ url('/admin/services') }}" class="btn
waves-effect">Cancel</a>
    </div>
</form>
</div>
</div>
</div>
@endsection

```

#### 6.5.1.1.5.3. index.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">group_work</i> Services<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Showing all services</small>
@endsection

@section('content')

    @php($i = 1)

    <div class="table-responsive">
        <table class="table table-striped">
            <thead>
                <tr class="info">
                    <th>Price category</th>
                    <th>Name</th>
                    <th>Edit</th>
                    <th>Delete</th>
                </tr>
            </thead>
            <tbody>

                @foreach($services as $service)

                    <tr>
                        <td>${{ $service->price->amount }}</td>

```

```

        <td>{{ $service->name }}</td>
        <td><a href="{{ url('/admin/services/' . $service-
>id.'/edit') }}" class="btn btn-info waves-effect btn-xs"><i class="material-
icons">edit</i></a></td>
        <td>
            <a class="btn btn-danger waves-effect btn-xs" href="#"
data-toggle="modal" data-target="#delete-modal{{ $i }}">
                <i class="material-icons">delete_forever</i>
            </a>
            <div class="modal fade" id="delete-modal{{ $i++ }}"
role="dialog">
                <div class="modal-dialog modal-sm text-center">
                    <div class="modal-content">
                        <div class="modal-body">
                            <button type="button" class="close"
data-dismiss="modal">
                                &times;
                            </button>
                            <h4>Are you sure?</h4>
                            <button type="button" class="btn btn-
default error" onclick="deletion({{ $service->id }}, '{{ $service->getTable()
}}')";">
                                Delete
                            </button>
                        </div>
                    </div>
                </div>
            </div>
        </td>
    </tr>
</tbody>
</table>

    <div class="text-center">{{ $services->links() }}</div>
</div>
@endsection

```

#### 6.5.1.1.6. sliders

##### 6.5.1.1.6.1. create.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">burst_mode</i> Sliders<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Creating slider images</small>

```



```

@endsection

@section('content')

    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
                @endisset

                <p class="lead">Create a slider image</p>
                <form action="{{ url('/admin/sliders') }}" method="POST"
enctype="multipart/form-data">
                    @csrf
                    <div class="form-group">
                        <div class="form-line">
                            <input name="position" id="position" type="number"
class="form-control" placeholder="Position" required />
                        </div>
                    </div>
                    <div class="form-group">
                        <label for="image"><i>Image:</i></label>
                        <input type="file" name="image" id="image" required />
                        (max. 2MB)
                        <br/>
                    </div>
                    <div class="form-group">
                        <button type="submit" name="sliderBtn" id="sliderBtn"
class="btn btn-primary waves-effect waves-light">Create</button>
                        <a href="{{ url('/admin/sliders') }}" class="btn
waves-effect">Cancel</a>
                    </div>
                </form>
            </div>
        </div>
    </div>

@endsection

```

#### 6.5.1.1.6.2. edit.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">burst_mode</i> Sliders<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Editing slider images</small>
@endsection

```

```

@section('content')

    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
                @endisset

                <p class="lead">Edit a slider image</p>
                <form action="{{ url('/admin/sliders/' . $slider->id) }}"
method="POST" enctype="multipart/form-data">
                    @method('PATCH')
                    @csrf
                    <div class="form-group">
                        <div class="form-line">
                            <input name="position" id="position" type="number"
class="form-control" placeholder="Position" required value="{{ $slider-
>position }}" />
                        </div>
                    </div>
                    <div class="form-group">
                        
                    </div>
                    <div class="form-group">
                        <label for="image"><i>Image:</i></label>
                        <input type="file" name="image" id="image" required />
                        (max. 2MB)
                        <br/>
                    </div>
                    <div class="form-group">
                        <button type="submit" name="sliderBtn" id="sliderBtn"
class="btn btn-primary waves-effect waves-light">Edit</button>
                        <a href="{{ url('/admin/sliders') }}" class="btn
waves-effect">Cancel</a>
                    </div>
                </form>
            </div>
        </div>
    </div>

@endsection

```

#### 6.5.1.1.6.3. index.blade.php

```

@extends('layouts.admin')

@section('header')

```

```

        <i class="material-icons icon_left">burst_mode</i> Sliders<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i>
class="pull-right go_back">Back</i></a>
        <small>Showing all slider images</small>
    @endsection

@section('content')

    @php($i = 1)

    <div class="table-responsive">
        <table class="table table-striped">
            <thead>
                <tr class="info">
                    <th>Position</th>
                    <th>Image</th>
                    <th>Edit</th>
                    <th>Delete</th>
                </tr>
            </thead>
            <tbody>

                @foreach($sliders as $slider)

                    <tr>
                        <td>{{ $slider->position }}</td>
                        <td></td>
                        <td><a href="{{ url('/admin/sliders/' . $slider->id . '/edit')
}}" class="btn btn-info waves-effect btn-xs"><i class="material-
icons">edit</i></a></td>
                        <td>
                            <a class="btn btn-danger waves-effect btn-xs" href="#"
data-toggle="modal" data-target="#delete-modal{{ $i }}">
                                <i class="material-icons">delete_forever</i>
                            </a>
                            <div class="modal fade id="delete-modal{{ $i++ }}"
role="dialog">
                                <div class="modal-dialog modal-sm text-center">
                                    <div class="modal-content">
                                        <div class="modal-body">
                                            <button type="button" class="close"
data-dismiss="modal">
                                                &times;
                                            </button>
                                            <h4>Are you sure?</h4>
                                            <button type="button" class="btn btn-
default error" onclick="deletion({{ $slider->id }}, '{{ $slider->getTable()
}}')";">
                                                Delete
                                            </button>
                                        </div>
                                    </div>
                                </div>
                            </div>
                        </td>
                    </tr>
                @endforeach
            </tbody>
        </table>
    </div>

```

```

        @endforeach

    </tbody>
</table>
</div>

@endsection

```

#### 6.5.1.1.7. socials

##### 6.5.1.1.7.1. create.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">share</i> Social links<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Creating social links</small>
@endsection

@section('content')

    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
                @endisset

                <p class="lead">Create a social link</p>
                <form action="{{ url('/admin/socials') }}" method="POST">
                    @csrf
                    <div class="form-group">
                        <div class="form-line">
                            <input name="name" id="name" type="text"
class="form-control" placeholder="Name" required />
                        </div>
                    </div>
                    <div class="form-group">
                        <div class="form-line">
                            <input name="url" id="url" type="url" class="form-
control" placeholder="URL" required />
                        </div>
                    </div>
                    <div class="form-group">
                        <div class="form-line">

```

```

        <input name="icon" id="icon" type="text"
class="form-control" placeholder="Font Awesome icon" required />
    </div>
</div>
<div class="form-group">
    <select name="trainer_id" id="trainer_id">
        <option value="">Select a trainer...</option>

        @foreach($trainers as $trainer)
            <option value="{{ $trainer->id }}">{{
$trainer->name }}</option>
        @endforeach

    </select>
</div>
<div class="form-group">
    <button type="submit" name="socialBtn" id="socialBtn"
class="btn btn-primary waves-effect waves-light">Create</button>
    <a href="{{ url('/admin/socials') }}" class="btn
waves-effect">Cancel</a>
</div>
</form>
</div>
</div>
</div>
</div>
@endsection

```

#### 6.5.1.1.7.2. edit.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">share</i> Social links<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Editing social links</small>
@endsection

@section('content')

    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
                @endisset

                <p class="lead">Edit a social link</p>
                <form action="{{ url('/admin/socials/' . $social->id) }}"

```

```

method="POST">
    @method('PATCH')
    @csrf
    <div class="form-group">
        <div class="form-line">
            <input name="name" id="name" type="text"
class="form-control" placeholder="Name" required value="{{ $social->name }}"
/>
        </div>
    </div>
    <div class="form-group">
        <div class="form-line">
            <input name="url" id="url" type="url" class="form-
control" placeholder="URL" required value="{{ $social->url }}" />
        </div>
    </div>
    <div class="form-group">
        <div class="form-line">
            <input name="icon" id="icon" type="text"
class="form-control" placeholder="Font Awesome icon" required value="{{
$social->icon }}" />
        </div>
    </div>
    <div class="form-group">
        <select name="trainer_id" id="trainer_id">
            <option value="{{ $social->trainer['id'] }}">{{
$social->trainer['name'] }}</option>

            @foreach($trainers as $trainer)
                <option value="{{ $trainer->id }}">{{
$trainer->name }}</option>
            @endforeach

        </select>
    </div>
    <div class="form-group">
        <button type="submit" name="socialBtn" id="socialBtn"
class="btn btn-primary waves-effect waves-light">Edit</button>
        <a href="{{ url('/admin/socials') }}" class="btn
waves-effect">Cancel</a>
    </div>
</form>
</div>
</div>
</div>
@endsection

```

#### 6.5.1.1.7.3. index.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">share</i> Social links<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i

```

```

class="pull-right go_back">Back</i></a>
    <small>Showing all social links</small>
@endsection

@section('content')

    @php($i = 1)

    <div class="table-responsive">
        <table class="table table-striped">
            <thead>
                <tr class="info">
                    <th>Name</th>
                    <th>Icon/URL</th>
                    <th>Trainer</th>
                    <th>Edit</th>
                    <th>Delete</th>
                </tr>
            </thead>
            <tbody>

                @foreach($socials as $social)

                    <tr>
                        <td>{{ $social->name }}</td>
                        <td><a href="{{ $social->url }}" class="fa fa-{{ $social-
>icon }}"></a></td>

                        @if($social->trainer['image'])
                            <td></td>
                        @else
                            <td>No trainer associated</td>
                        @endif

                        <td><a href="{{ url('/admin/socials/' . $social->id . '/edit')
}}" class="btn btn-info waves-effect btn-xs"><i class="material-
icons">edit</i></a></td>
                        <td>
                            <a class="btn btn-danger waves-effect btn-xs" href="#"
data-toggle="modal" data-target="#delete-modal{{ $i }}">
                                <i class="material-icons">delete_forever</i>
                            </a>
                            <div class="modal fade" id="delete-modal{{ $i++ }}"
role="dialog">
                                <div class="modal-dialog modal-sm text-center">
                                    <div class="modal-content">
                                        <div class="modal-body">
                                            <button type="button" class="close"
data-dismiss="modal">
                                                &times;
                                            </button>
                                            <h4>Are you sure?</h4>
                                            <button type="button" class="btn btn-
default error" onclick="deletion({{ $social->id }}, '{{ $social->getTable()
}}')";">
                                                Delete

```

```

                </button>
            </div>
        </div>
    </div>
</td>
</tr>

@endforeach

</tbody>
</table>
</div>

@endsection

```

#### 6.5.1.1.8. trainers

##### 6.5.1.1.8.1. create.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">fitness_center</i> Trainers<a href="{{ url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i class="pull-right go_back">Back</i></a>
    <small>Creating Trainers</small>
@endsection

@section('content')

    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
                @endisset

                <p class="lead">Create a trainer</p>
                <form action="{{ url('/admin/trainers') }}" method="POST"
enctype="multipart/form-data">
                    @csrf
                    <div class="form-group">
                        <div class="form-line">
                            <input name="name" id="name" type="text"
class="form-control" placeholder="Name" required />
                        </div>
                    </div>

```



```

        <div class="form-group">
            <div class="form-line">
                <input name="workout" id="workout" type="text"
class="form-control" placeholder="Workout" required />
            </div>
        </div>
        <div class="form-group">
            <div class="form-line">
                <textarea name="description" id="description"
class="form-control" placeholder="Content" rows="7" required ></textarea>
            </div>
        </div>
        <div class="form-group">
            <label for="image"><p><i>Image:</i></p></label>
            <input type="file" name="image" id="image" />
            (max. 2MB, 474x592)
            <br/>
        </div>
        <div class="form-group">
            <button type="submit" name="trainerBtn"
id="trainerBtn" class="btn btn-primary waves-effect waves-
light">Create</button>
            <a href="{{ url('/admin/trainers') }}" class="btn
waves-effect">Cancel</a>
        </div>
    </form>
</div>
</div>
</div>
@endsection

```

#### 6.5.1.1.8.2. edit.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">fitness_center</i> Trainers<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Editing Trainers</small>
@endsection

@section('content')
    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
            </div>
        </div>
    </div>

```

```

        @endisset

        <p class="lead">Edit a trainer</p>
        <form action="{{ url('/admin/trainers/' . $trainer->id) }}"
method="POST" enctype="multipart/form-data">
            @method('PATCH')
            @csrf
            <div class="form-group">
                <div class="form-line">
                    <input name="name" id="name" type="text"
class="form-control" placeholder="Name" required value="{{ $trainer->name }}"
/>
                </div>
            </div>
            <div class="form-group">
                <div class="form-line">
                    <input name="workout" id="workout" type="text"
class="form-control" placeholder="Workout" required value="{{ $trainer-
>workout }}" />
                </div>
            </div>
            <div class="form-group">
                <div class="form-line">
                    <textarea name="description" id="description"
class="form-control" placeholder="Content" rows="7" required >{{ $trainer-
>description }}</textarea>
                </div>
            </div>
            <div class="form-group">
                
            </div>
            <div class="form-group">
                <label for="image"><p><i>Image:</i></p></label>
                <input type="file" name="image" id="image" />
                (max. 2MB, 474x592)
                <br/>
            </div>
            <div class="form-group">
                <button type="submit" name="trainerBtn"
id="trainerBtn" class="btn btn-primary waves-effect waves-light">Edit</button>
                <a href="{{ url('/admin/trainers') }}" class="btn
waves-effect">Cancel</a>
            </div>
        </form>
    </div>
</div>
</div>
@endsection

```

#### 6.5.1.1.8.3. index.blade.php

```
@extends('layouts.admin')
```

```

@section('header')
    <i class="material-icons icon_left">fitness_center</i> Trainers<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Showing all trainers</small>
@endsection

@section('content')

    @php($i = 1)

    <div class="table-responsive">
        <table class="table table-striped">
            <thead>
                <tr class="info">
                    <th>Name</th>
                    <th>Workout</th>
                    <th>Description</th>
                    <th>Join date</th>
                    <th>Image</th>
                    <th>Edit</th>
                    <th>Delete</th>
                </tr>
            </thead>
            <tbody>

                @foreach($trainers as $trainer)

                    <tr>
                        <td>{{ $trainer->name }}</td>
                        <td>{{ $trainer->workout }}</td>
                        <td>{{ $trainer->description }}</td>
                        <td>{{ $trainer->created_at->format('d.m.Y.') }}</td>
                        <td></td>
                        <td><a href="{{ url('/admin/trainers/' . $trainer-
>id . '/edit') }}" class="btn btn-info waves-effect btn-xs"><i class="material-
icons">edit</i></a></td>
                        <td>
                            <a class="btn btn-danger waves-effect btn-xs" href="#"
data-toggle="modal" data-target="#delete-modal{{ $i }}">
                                <i class="material-icons">delete_forever</i>
                            </a>
                            <div class="modal fade" id="delete-modal{{ $i++ }}"
role="dialog">
                                <div class="modal-dialog modal-sm text-center">
                                    <div class="modal-content">
                                        <div class="modal-body">
                                            <button type="button" class="close"
data-dismiss="modal">
                                                &times;
                                            </button>
                                            <h4>Are you sure?</h4>
                                            <button type="button" class="btn btn-
default error" onclick="deletion({{ $trainer->id }}, '{{ $trainer->getTable()
}}')";">
                                                Delete

```

```

        </button>
    </div>
</div>
</div>
</div>
</td>
</tr>

@endforeach

</tbody>
</table>
</div>

@endsection

```

#### 6.5.1.1.9. users

##### 6.5.1.1.9.1. create.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">person</i> Users<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Creating users</small>
@endsection

@section('content')

    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
                @endisset

                <p class="lead">Create a user</p>
                <form action="{{ url('/admin/users') }}" method="POST"
enctype="multipart/form-data">
                    @csrf
                    <div class="form-group">
                        <div class="form-line">
                            <input name="first_name" id="first_name"
type="text" class="form-control" placeholder="First name" required />
                        </div>
                    </div>

```

```

        <div class="form-group">
            <div class="form-line">
                <input name="last_name" id="last_name" type="text"
class="form-control" placeholder="Last name" required />
            </div>
        </div>
        <div class="form-group">
            <div class="form-line">
                <input name="email" id="email" type="email"
class="form-control" placeholder="E-mail" required />
            </div>
        </div>
        <div class="form-group">
            <div class="form-line">
                <input name="password" id="password"
type="password" class="form-control" placeholder="Password" required />
            </div>
        </div>
        <div class="form-group">
            <p><i>Role:</i></p>
            <input id="role_id1" name="role_id" type="radio"
value="1" />
            <label for="role_id1"> Admin </label>
            <input id="role_id2" name="role_id" type="radio"
value="2" />
            <label for="role_id2"> User </label>
        </div>
        <div class="form-group">
            <p><i>Active:</i></p>
            <input id="active1" name="email_verified_at"
type="radio" value="{{ date('Y-m-d H:i:s', time()) }}" />
            <label for="active1"> Yes </label>
        </div>
        <div class="form-group">
            <label for="image"><p><i>Image:</i></p></label>
            <input type="file" name="image" id="image" />
            (max. 2MB, 1:1 ratio)
            <br/>
        </div>
        <div class="form-group">
            <button type="submit" name="userBtn" id="userBtn"
class="btn btn-primary waves-effect waves-light">Create</button>
            <a href="{{ url('/admin/users') }}" class="btn waves-
effect">Cancel</a>
        </div>
    </form>
</div>
</div>
</div>
@endsection

```

#### 6.5.1.1.9.2. edit.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">person</i> Users<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Editing users</small>
@endsection

@section('content')

    <div class="body">
        <div class="row">
            <div class="col-md-4 col-md-offset-4">

                @isset($errors)
                    @foreach($errors->all() as $error)
                        <div class="alert alert-warning">
                            {{ $error }}
                        </div>
                    @endforeach
                @endisset

                <p class="lead">Edit a user</p>
                <form action="{{ url('/admin/users/' . $user->id) }}"
method="POST" enctype="multipart/form-data">
                    @method('PATCH')
                    @csrf
                    <div class="form-group">
                        <div class="form-line">
                            <input name="first_name" id="first_name"
type="text" class="form-control" placeholder="First name" value="{{ $user-
>first_name }}" required />
                        </div>
                    </div>
                    <div class="form-group">
                        <div class="form-line">
                            <input name="last_name" id="last_name" type="text"
class="form-control" placeholder="Last name" value="{{ $user->last_name }}"
required />
                        </div>
                    </div>
                    <div class="form-group">
                        <div class="form-line">
                            <input name="email" id="email" type="email"
class="form-control" placeholder="E-mail" value="{{ $user->email }}" required
/>
                        </div>
                    </div>
                    <div class="form-group">
                        <p><i>Role:</i></p>
                        <input id="role_id1" name="role_id" type="radio"
value="1" @if($user->role_id == 1) checked @endif />
                        <label for="role_id1"> Admin </label>
                        <input id="role_id2" name="role_id" type="radio"
value="2" @if($user->role_id == 2) checked @endif />
                        <label for="role_id2"> User </label>

```

```

        </div>
        <div class="form-group">
            <p><i>Active:</i></p>
            <input id="active1" name="email_verified_at"
type="radio" value="{{ date("Y-m-d H:i:s", time()) }}" @if($user-
>email_verified_at) checked @endif />
            <label for="active1"> Yes </label>
        </div>
        <div class="form-group">
            
        </div>
        <div class="form-group">
            <label for="image"><p><i>Image:</i></p></label>
            <input type="file" name="image" id="image" />
            (max. 2MB, 1:1 ratio)
            <br/>
        </div>
        <div class="form-group">
            <button type="submit" name="userBtn" id="userBtn"
class="btn btn-primary waves-effect waves-light">Edit</button>
            <a href="{{ url('/admin/users') }}" class="btn waves-
effect">Cancel</a>
        </div>
    </form>
</div>
</div>
@endsection

```

#### 6.5.1.1.9.3. index.blade.php

```

@extends('layouts.admin')

@section('header')
    <i class="material-icons icon_left">person</i> Users<a href="{{
url('/admin') }}"><i class="material-icons pull-right">keyboard_return</i><i
class="pull-right go_back">Back</i></a>
    <small>Showing all users</small>
@endsection

@section('content')

    @php($i = 1)

    <div class="table-responsive">
        <table class="table table-striped">
            <thead>
                <tr class="info">
                    <th>First name</th>
                    <th>Last name</th>
                    <th>E-mail</th>
                    <th>Role</th>
                    <th>Join date</th>
                    <th>Active</th>

```

```

        <th>Image</th>
        <th>Edit</th>
        <th>Delete</th>
    </tr>
</thead>
<tbody>

    @foreach($users as $user)

        <tr>
            <td>{{ $user->first_name }}</td>
            <td>{{ $user->last_name }}</td>
            <td>{{ $user->email }}</td>
            <td>{{ $user->role->name }}</td>
            <td>{{ $user->created_at->format('d.m.Y.') }}</td>
            <td>@if($user->email_verified_at != NULL)Yes @else No
@elseif</td>
            <td></td>
            <td><a href="{{ url('/admin/users/' . $user->id . '/edit') }}"
class="btn btn-info waves-effect btn-xs"><i class="material-
icons">edit</i></a></td>
            <td>
                <a class="btn btn-danger waves-effect btn-xs" href="#"
data-toggle="modal" data-target="#delete-modal{{ $i }}">
                    <i class="material-icons">delete_forever</i>
                </a>
                <div class="modal fade" id="delete-modal{{ $i++ }}"
role="dialog">
                    <div class="modal-dialog modal-sm text-center">
                        <div class="modal-content">
                            <div class="modal-body">
                                <button type="button" class="close" data-
dismiss="modal">
                                    &times;
                                </button>
                                <h4>Are you sure?</h4>
                                <button type="button" class="btn btn-
default error" onclick="deletion({{ $user->id }}, '{{ $user->getTable()
}}')";">
                                    Delete
                                </button>
                            </div>
                        </div>
                    </div>
                </div>
            </td>
        </tr>

    @endforeach

</tbody>
</table>
</div>

@endsection

```



### 6.5.1.2. partials

#### 6.5.1.2.1. common

##### 6.5.1.2.1.1. head.blade.php

```
<head>
  <meta charset="UTF-8" />
  <meta http-equiv="X-UA-Compatible" content="IE=Edge" />
  <meta content="width=device-width, initial-scale=1, maximum-scale=1, user-
scalable=no" name="viewport" />
  <title>Energy Fitness | Admin panel</title>
  <link rel="icon" href="{{ asset('images/favicon/energy.png') }}"
type="image/x-icon" />
  <link
href="https://fonts.googleapis.com/css?family=Roboto:400,700&subset=latin,cyri
llic-ext" rel="stylesheet" type="text/css" />
  <link href="https://fonts.googleapis.com/icon?family=Material+Icons"
rel="stylesheet" type="text/css" />
  <link href="https://stackpath.bootstrapcdn.com/font-
awesome/4.7.0/css/font-awesome.min.css" rel="stylesheet" integrity="sha384-
wvfxPqpZZVQGK6TAh5PVlGOfQNHSoD2xbE+QkPxCAFLNEevoEH3Sl0sibVcOQVnN"
crossorigin="anonymous">
  <link href="{{
asset('admin_assets/plugins/bootstrap/css/bootstrap.min.css') }}"
rel="stylesheet" />
  <link href="{{ asset('admin_assets/plugins/bootstrap-select/css/bootstrap-
select.min.css') }}" rel="stylesheet" />
  <link href="{{ asset('admin_assets/plugins/node-waves/waves.min.css') }}"
rel="stylesheet" />
  <link href="{{ asset('admin_assets/plugins/animate-css/animate.min.css')
}}" rel="stylesheet" />
  <link href="{{ asset('admin_assets/css/style.min.css') }}"
rel="stylesheet" />
  <link href="{{ asset('admin_assets/css/themes/theme-light-blue.min.css')
}}" rel="stylesheet" />
  <link href="{{ asset('admin_assets/css/custom.css') }}" rel="stylesheet"
/>
</head>
```

##### 6.5.1.2.1.2. loader.blade.php

```
<div class="page-loader-wrapper">
  <div class="loader">
    <div class="preloader">
      <div class="spinner-layer pl-light-blue">
        <div class="circle-clipper left">
          <div class="circle"></div>
        </div>
        <div class="circle-clipper right">
```

```

        <div class="circle"></div>
    </div>
</div>
</div>
<p>Loading...</p>
</div>
</div>

```

#### 6.5.1.2.1.3. nav.blade.php

```

<div class="overlay"></div>

<nav class="navbar">
    <div class="container-fluid">
        <div class="navbar-header">
            <a href="javascript:void(0);" class="navbar-toggle collapsed"
data-toggle="collapse" data-target="#navbar-collapse" aria-
expanded="false"></a>
            <a href="javascript:void(0);" class="bars"></a>
            <b><a class="navbar-brand" href="{{ url('/admin')
}}">ADMINISTRATION</a></b>
        </div>
        <div class="collapse navbar-collapse" id="navbar-collapse">
            <ul class="nav navbar-nav navbar-right">
                <li><a href="{{ url('/') }}"><i class="material-
icons">directions_run</i><b class="pull-left">Exit</b></a></li>
            </ul>
        </div>
    </div>
</nav>

```

#### 6.5.1.2.1.4. scripts.blade.php

```

<script>
    const BASE_URL = "{{ url('/admin') }}";
    const TOKEN = "{{ csrf_token() }}";
</script>
<script src="{{ asset('admin_assets/plugins/jquery/jquery.min.js')
}}"></script>
<script src="{{ asset('admin_assets/plugins/bootstrap/js/bootstrap.min.js')
}}"></script>
<script src="{{ asset('admin_assets/plugins/bootstrap-select/js/bootstrap-
select.min.js') }}"></script>
<script src="{{ asset('admin_assets/plugins/jquery-
slimscroll/jquery.slimscroll.js') }}"></script>
<script src="{{ asset('admin_assets/plugins/node-waves/waves.min.js')
}}"></script>
<script src="{{ asset('admin_assets/js/admin.js') }}"></script>
<script src="{{ asset('admin_assets/js/ajax_admin.js') }}"></script>

```

#### 6.5.1.2.1.5. sidebar.blade.php

```
<section>
  <aside id="leftsidebar" class="sidebar">

    <!-- User info -->
    <div class="user-info">
      <div class="image">
        
      </div>
      <div class="info-container">
        <div class="name" data-toggle="dropdown" aria-haspopup="true"
aria-expanded="false">{{ session('user')->first_name }} {{ session('user')-
>last_name }}</div>
        <div class="email">{{ session('user')->email }}</div>
      </div>
    </div>
    <!-- User info END -->

    <!-- Menu -->
    <div class="menu">
      <ul class="list">
        <li class="header">NAVIGATION</li>

        <li>
          <a href="javascript:void(0);" class="menu-toggle">
            <i class="material-icons">person</i>
            <span>Users</span>
          </a>
          <ul class="ml-menu">
            <li>
              <a href="{{ url('/admin/users') }}">Show all
users</a>
            </li>
            <li>
              <a href="{{ url('/admin/users/create') }}">Create
a user</a>
            </li>
          </ul>
        </li>

        <li>
          <a href="javascript:void(0);" class="menu-toggle">
            <i class="material-icons">border_color</i>
            <span>Posts</span>
          </a>
          <ul class="ml-menu">
            <li>
              <a href="{{ url('/admin/posts') }}">Show all
posts</a>
            </li>
            <li>
              <a href="{{ url('/admin/posts/create') }}">Create
a post</a>
            </li>
          </ul>
        </li>
      </ul>
    </div>
  </aside>
</section>
```

```

        </ul>
    </li>

    <li>
        <a href="javascript:void(0);" class="menu-toggle">
            <i class="material-icons">burst_mode</i>
            <span>Slider</span>
        </a>
        <ul class="ml-menu">
            <li>
                <a href="{ { url('/admin/sliders') } }">Show all
slider images</a>
            </li>
            <li>
                <a href="{ { url('/admin/sliders/create')
}}">Create a slider image</a>
            </li>
        </ul>
    </li>

    <li>
        <a href="javascript:void(0);" class="menu-toggle">
            <i class="material-icons">link</i>
            <span>Menu links</span>
        </a>
        <ul class="ml-menu">
            <li>
                <a href="{ { url('/admin/menus') } }">Show all menu
links</a>
            </li>
            <li>
                <a href="{ { url('/admin/menus/create') } }">Create
a menu link</a>
            </li>
        </ul>
    </li>

    <li>
        <a href="javascript:void(0);" class="menu-toggle">
            <i class="material-icons">fitness_center</i>
            <span>Trainers</span>
        </a>
        <ul class="ml-menu">
            <li>
                <a href="{ { url('/admin/trainers') } }">Show all
trainers</a>
            </li>
            <li>
                <a href="{ { url('/admin/trainers/create')
}}">Create a trainer</a>
            </li>
        </ul>
    </li>

    <li>
        <a href="javascript:void(0);" class="menu-toggle">
            <i class="material-icons">euro_symbol</i>

```

```

        <span>Prices</span>
    </a>
    <ul class="ml-menu">
        <li>
            <a href="{ url('/admin/prices') }}">Show all
prices</a>
        </li>
        <li>
            <a href="{ url('/admin/prices/create') }}">Create
a price</a>
        </li>
    </ul>
</li>

<li>
    <a href="javascript:void(0);" class="menu-toggle">
        <i class="material-icons">group_work</i>
        <span>Services</span>
    </a>
    <ul class="ml-menu">
        <li>
            <a href="{ url('/admin/services') }}">Show all
services</a>
        </li>
        <li>
            <a href="{ url('/admin/services/create')
}}">Create a service</a>
        </li>
    </ul>
</li>

<li>
    <a href="javascript:void(0);" class="menu-toggle">
        <i class="material-icons">share</i>
        <span>Social links</span>
    </a>
    <ul class="ml-menu">
        <li>
            <a href="{ url('/admin/socials/') }}">Show all
links</a>
        </li>
        <li>
            <a href="{ url('/admin/socials/create')
}}">Create a link</a>
        </li>
    </ul>
</li>

</ul>
</div>
<!-- Menu END -->

<!-- Footer -->
<div class="legal">
    <div class="copyright">
        &copy; 2019 Jovan Ranković
    </div>

```

```

        <div class="version">
            <a href="https://en.ict.edu.rs">ICT college of vocational
studies</a>
        </div>
    </div>
    <!-- Footer END -->

</aside>
</section>

```

#### 6.5.1.2.2. home

##### 6.5.1.2.2.1. db\_info.blade.php

```

@section('header')
    Welcome, {{ session()->get('user')->first_name }} {{ session()-
>get('user')->last_name }}!
@endsection

<div class="body">
    <div class="row clearfix">

        <div class="col-lg-3 col-md-3 col-sm-6 col-xs-12">
            <a href="{{ url('/admin/users') }}">
                <div class="link_show_all info-box bg-light-blue hover-expand-
effect" data-link="user_show">
                    <div class="icon">
                        <i class="material-icons">person</i>
                    </div>
                    <div class="content">
                        <div class="text">{{ $users->count() }} USERS</div>
                    </div>
                </div>
            </a>
        </div>

        <div class="col-lg-3 col-md-3 col-sm-6 col-xs-12">
            <div class="link_show_all info-box bg-light-blue hover-expand-
effect" data-link="user_show">
                <div class="icon">
                    <i class="material-icons">group</i>
                </div>
                <div class="content">
                    <div class="text">{{ $roles->count() }} ROLES</div>
                </div>
            </div>
        </div>

        <div class="col-lg-3 col-md-3 col-sm-6 col-xs-12">
            <a href="{{ url('/admin/posts') }}">
                <div class="link_show_all info-box bg-light-blue hover-expand-
effect" data-link="post_show">
                    <div class="icon">

```

```

        <i class="material-icons">border_color</i>
    </div>
    <div class="content">
        <div class="text">{{ $posts->count() }} POSTS</div>
    </div>
</div>
</a>
</div>

<div class="col-lg-3 col-md-3 col-sm-6 col-xs-12">
    <div class="info-box bg-light-blue hover-expand-effect">
        <div class="icon">
            <i class="material-icons">mode_comment</i>
        </div>
        <div class="content">
            <div class="text">{{ $comments->count() }} COMMENTS</div>
        </div>
    </div>
</div>

<div class="col-lg-3 col-md-3 col-sm-6 col-xs-12">
    <a href="{{ url('/admin/sliders') }}">
        <div class="link_show_all info-box bg-light-blue hover-expand-
effect" data-link="slider_show">
            <div class="icon">
                <i class="material-icons">burst_mode</i>
            </div>
            <div class="content">
                <div class="text">{{ $sliders->count() }}
SLIDERS</div>
            </div>
        </div>
    </a>
</div>

<div class="col-lg-3 col-md-3 col-sm-6 col-xs-12">
    <a href="{{ url('/admin/menus') }}">
        <div class="link_show_all info-box bg-light-blue hover-expand-
effect" data-link="link_show">
            <div class="icon">
                <i class="material-icons">link</i>
            </div>
            <div class="content">
                <div class="text">{{ $menus->count() }} MENU
LINKS</div>
            </div>
        </div>
    </a>
</div>

<div class="col-lg-3 col-md-3 col-sm-6 col-xs-12">
    <a href="{{ url('/admin/trainers') }}">
        <div class="link_show_all info-box bg-light-blue hover-expand-
effect" data-link="poll_show">
            <div class="icon">
                <i class="material-icons">fitness_center</i>
            </div>

```

```

        <div class="content">
            <div class="text">{{ $trainers->count() }}
TRAINERS</div>
        </div>
    </div>
</a>
</div>

<div class="col-lg-3 col-md-3 col-sm-6 col-xs-12">
    <a href="{{ url('/admin/prices') }}">
        <div class="link_show_all info-box bg-light-blue hover-expand-
effect" data-link="gallery_show">
            <div class="icon">
                <i class="material-icons">euro_symbol</i>
            </div>
            <div class="content">
                <div class="text">{{ $prices->count() }} PRICES</div>
            </div>
        </div>
    </a>
</div>

<div class="col-lg-3 col-md-3 col-sm-6 col-xs-12">
    <a href="{{ url('/admin/services') }}">
        <div class="link_show_all info-box bg-light-blue hover-expand-
effect" data-link="gallery_show">
            <div class="icon">
                <i class="material-icons">group_work</i>
            </div>
            <div class="content">
                <div class="text">{{ $services->count() }}
SERVICES</div>
            </div>
        </div>
    </a>
</div>

<div class="col-lg-3 col-md-3 col-sm-6 col-xs-12">
    <a href="{{ url('/admin/socials') }}">
        <div class="info-box bg-light-blue hover-expand-effect">
            <div class="icon">
                <i class="material-icons">share</i>
            </div>
            <div class="content">
                <div class="text">{{ $socials->count() }} SOCIAL
LINKS</div>
            </div>
        </div>
    </a>
</div>

<div class="col-lg-3 col-md-3 col-sm-6 col-xs-12">
    <a href="{{ url('/top_secret_admin_path') }}">
        <div class="info-box bg-deep-purple hover-expand-effect">
            <div class="icon">
                <i class="material-icons">brightness_7</i>
            </div>

```



```

        <div class="content">
            <div class="text">TELESCOPE</div>
        </div>
    </div>
</a>
</div>
</div>

```

## 6.5.2. errors

### 6.5.2.1. 403.blade.php

```

<style>
    body {
        background-color: #2F3242;
    }
    svg {
        position: absolute;
        top: 50%;
        left: 50%;
        margin-top: -250px;
        margin-left: -400px;
    }
    .message-box {
        height: 200px;
        width: 380px;
        position: absolute;
        top: 50%;
        left: 50%;
        margin-top: -100px;
        margin-left: 50px;
        color: #FFF;
        font-family: Calibri;
        font-weight: 300;
    }
    .message-box h1 {
        font-size: 60px;
        line-height: 46px;
        margin-bottom: 40px;
    }
    .buttons-con .action-link-wrap {
        margin-top: 40px;
    }
    .buttons-con .action-link-wrap a {
        background: #675285;
        padding: 8px 25px;
        border-radius: 4px;
        color: #FFF;
        font-weight: bold;
        font-size: 14px;
        transition: all 0.3s linear;
    }

```

```

        cursor: pointer;
        text-decoration: none;
        margin-right: 10px
    }
    .buttons-con .action-link-wrap a:hover {
        background: #5A5C6C;
        color: #fff;
    }

    #Polygon-1 , #Polygon-2 , #Polygon-3 , #Polygon-4 , #Polygon-4, #Polygon-5
{
    animation: float 1s infinite ease-in-out alternate;
}
#Polygon-2 {
    animation-delay: .2s;
}
#Polygon-3 {
    animation-delay: .4s;
}
#Polygon-4 {
    animation-delay: .6s;
}
#Polygon-5 {
    animation-delay: .8s;
}

@keyframes float {
    100% {
        transform: translateY(20px);
    }
}
@media (max-width: 450px) {
    svg {
        position: absolute;
        top: 50%;
        left: 50%;
        margin-top: -250px;
        margin-left: -190px;
    }
    .message-box {
        top: 50%;
        left: 50%;
        margin-top: -100px;
        margin-left: -190px;
        text-align: center;
    }
}
}
</style>

<svg width="380px" height="500px" viewBox="0 0 837 1045" version="1.1"
xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/1999/xlink"
xmlns:sketch="http://www.bohemiancoding.com/sketch/ns">
    <g id="Page-1" stroke="none" stroke-width="1" fill="none" fill-
rule="evenodd" sketch:type="MSPage">
        <path d="M353,9 L626.664028,170 L626.664028,487 L353,642
L79.3359724,487 L79.3359724,170 L353,9 Z" id="Polygon-1" stroke="#007FB2"
stroke-width="6" sketch:type="MSShapeGroup"></path>

```

```

    <path d="M78.5,529 L147,569.186414 L147,648.311216 L78.5,687
L10,648.311216 L10,569.186414 L78.5,529 Z" id="Polygon-2" stroke="#EF4A5B"
stroke-width="6" sketch:type="MSShapeGroup"></path>
    <path d="M773,186 L827,217.538705 L827,279.636651 L773,310
L719,279.636651 L719,217.538705 L773,186 Z" id="Polygon-3" stroke="#795D9C"
stroke-width="6" sketch:type="MSShapeGroup"></path>
    <path d="M639,529 L773,607.846761 L773,763.091627 L639,839
L505,763.091627 L505,607.846761 L639,529 Z" id="Polygon-4" stroke="#F2773F"
stroke-width="6" sketch:type="MSShapeGroup"></path>
    <path d="M281,801 L383,861.025276 L383,979.21169 L281,1037
L179,979.21169 L179,861.025276 L281,801 Z" id="Polygon-5" stroke="#36B455"
stroke-width="6" sketch:type="MSShapeGroup"></path>
  </g>
</svg>
<div class="message-box">
  <h1>403</h1>
  <p>Seems you're not allowed here.</p>
  <div class="buttons-con">
    <div class="action-link-wrap">
      <a onclick="history.back(-1)" class="link-button link-back-
button">Back to site</a>
    </div>
  </div>
</div>

```

#### 6.5.2.2. 404.blade.php

```

<style>
  body {
    background-color: #2F3242;
  }
  svg {
    position: absolute;
    top: 50%;
    left: 50%;
    margin-top: -250px;
    margin-left: -400px;
  }
  .message-box {
    height: 200px;
    width: 380px;
    position: absolute;
    top: 50%;
    left: 50%;
    margin-top: -100px;
    margin-left: 50px;
    color: #FFF;
    font-family: Calibri;
    font-weight: 300;
  }
  .message-box h1 {
    font-size: 60px;
    line-height: 46px;
    margin-bottom: 40px;
  }

```

```

.buttons-con .action-link-wrap {
    margin-top: 40px;
}
.buttons-con .action-link-wrap a {
    background: #675285;
    padding: 8px 25px;
    border-radius: 4px;
    color: #FFF;
    font-weight: bold;
    font-size: 14px;
    transition: all 0.3s linear;
    cursor: pointer;
    text-decoration: none;
    margin-right: 10px
}
.buttons-con .action-link-wrap a:hover {
    background: #5A5C6C;
    color: #fff;
}

#Polygon-1 , #Polygon-2 , #Polygon-3 , #Polygon-4 , #Polygon-4, #Polygon-5
{
    animation: float 1s infinite ease-in-out alternate;
}
#Polygon-2 {
    animation-delay: .2s;
}
#Polygon-3 {
    animation-delay: .4s;
}
#Polygon-4 {
    animation-delay: .6s;
}
#Polygon-5 {
    animation-delay: .8s;
}

@keyframes float {
    100% {
        transform: translateY(20px);
    }
}
@media (max-width: 450px) {
    svg {
        position: absolute;
        top: 50%;
        left: 50%;
        margin-top: -250px;
        margin-left: -190px;
    }
    .message-box {
        top: 50%;
        left: 50%;
        margin-top: -100px;
        margin-left: -190px;
        text-align: center;
    }
}

```

```

    }
</style>

<svg width="380px" height="500px" viewBox="0 0 837 1045" version="1.1"
xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/1999/xlink"
xmlns:sketch="http://www.bohemiancoding.com/sketch/ns">
  <g id="Page-1" stroke="none" stroke-width="1" fill="none" fill-
rule="evenodd" sketch:type="MSPage">
    <path d="M353,9 L626.664028,170 L626.664028,487 L353,642
L79.3359724,487 L79.3359724,170 L353,9 Z" id="Polygon-1" stroke="#007FB2"
stroke-width="6" sketch:type="MSShapeGroup"></path>
    <path d="M78.5,529 L147,569.186414 L147,648.311216 L78.5,687
L10,648.311216 L10,569.186414 L78.5,529 Z" id="Polygon-2" stroke="#EF4A5B"
stroke-width="6" sketch:type="MSShapeGroup"></path>
    <path d="M773,186 L827,217.538705 L827,279.636651 L773,310
L719,279.636651 L719,217.538705 L773,186 Z" id="Polygon-3" stroke="#795D9C"
stroke-width="6" sketch:type="MSShapeGroup"></path>
    <path d="M639,529 L773,607.846761 L773,763.091627 L639,839
L505,763.091627 L505,607.846761 L639,529 Z" id="Polygon-4" stroke="#F2773F"
stroke-width="6" sketch:type="MSShapeGroup"></path>
    <path d="M281,801 L383,861.025276 L383,979.21169 L281,1037
L179,979.21169 L179,861.025276 L281,801 Z" id="Polygon-5" stroke="#36B455"
stroke-width="6" sketch:type="MSShapeGroup"></path>
  </g>
</svg>
<div class="message-box">
  <h1>404</h1>
  <p>Something didn't fit in here.</p>
  <div class="buttons-con">
    <div class="action-link-wrap">
      <a onclick="history.back(-1)" class="link-button link-back-
button">Back to site</a>
    </div>
  </div>
</div>

```

#### 6.5.2.1. 419.blade.php

```

<style>
  body {
    background-color: #2F3242;
  }
  svg {
    position: absolute;
    top: 50%;
    left: 50%;
    margin-top: -250px;
    margin-left: -400px;
  }
  .message-box {
    height: 200px;
    width: 380px;
    position: absolute;
    top: 50%;
    left: 50%;
  }

```

```

        margin-top: -100px;
        margin-left: 50px;
        color: #FFF;
        font-family: Calibri;
        font-weight: 300;
    }
    .message-box h1 {
        font-size: 60px;
        line-height: 46px;
        margin-bottom: 40px;
    }
    .buttons-con .action-link-wrap {
        margin-top: 40px;
    }
    .buttons-con .action-link-wrap a {
        background: #675285;
        padding: 8px 25px;
        border-radius: 4px;
        color: #FFF;
        font-weight: bold;
        font-size: 14px;
        transition: all 0.3s linear;
        cursor: pointer;
        text-decoration: none;
        margin-right: 10px
    }
    .buttons-con .action-link-wrap a:hover {
        background: #5A5C6C;
        color: #fff;
    }

    #Polygon-1 , #Polygon-2 , #Polygon-3 , #Polygon-4 , #Polygon-4, #Polygon-5
{
    animation: float 1s infinite ease-in-out alternate;
}
#Polygon-2 {
    animation-delay: .2s;
}
#Polygon-3 {
    animation-delay: .4s;
}
#Polygon-4 {
    animation-delay: .6s;
}
#Polygon-5 {
    animation-delay: .8s;
}

@keyframes float {
    100% {
        transform: translateY(20px);
    }
}
@media (max-width: 450px) {
    svg {
        position: absolute;
        top: 50%;
    }
}

```

```

        Left: 50%;
        margin-top: -250px;
        margin-left: -190px;
    }
    .message-box {
        top: 50%;
        Left: 50%;
        margin-top: -100px;
        margin-left: -190px;
        text-align: center;
    }
}
</style>

<svg width="380px" height="500px" viewBox="0 0 837 1045" version="1.1"
xmlns="http://www.w3.org/2000/svg" xmlns:xlink="http://www.w3.org/1999/xlink"
xmlns:sketch="http://www.bohemiancoding.com/sketch/ns">
    <g id="Page-1" stroke="none" stroke-width="1" fill="none" fill-
rule="evenodd" sketch:type="MSPage">
        <path d="M353,9 L626.664028,170 L626.664028,487 L353,642
L79.3359724,487 L79.3359724,170 L353,9 Z" id="Polygon-1" stroke="#007FB2"
stroke-width="6" sketch:type="MSShapeGroup"></path>
        <path d="M78.5,529 L147,569.186414 L147,648.311216 L78.5,687
L10,648.311216 L10,569.186414 L78.5,529 Z" id="Polygon-2" stroke="#EF4A5B"
stroke-width="6" sketch:type="MSShapeGroup"></path>
        <path d="M773,186 L827,217.538705 L827,279.636651 L773,310
L719,279.636651 L719,217.538705 L773,186 Z" id="Polygon-3" stroke="#795D9C"
stroke-width="6" sketch:type="MSShapeGroup"></path>
        <path d="M639,529 L773,607.846761 L773,763.091627 L639,839
L505,763.091627 L505,607.846761 L639,529 Z" id="Polygon-4" stroke="#F2773F"
stroke-width="6" sketch:type="MSShapeGroup"></path>
        <path d="M281,801 L383,861.025276 L383,979.21169 L281,1037
L179,979.21169 L179,861.025276 L281,801 Z" id="Polygon-5" stroke="#36B455"
stroke-width="6" sketch:type="MSShapeGroup"></path>
    </g>
</svg>
<div class="message-box">
    <h1>419</h1>
    <p>Hmm... try logging in again.</p>
    <div class="buttons-con">
        <div class="action-link-wrap">
            <a onclick="history.back(-1)" class="link-button link-back-
button">Back to site</a>
        </div>
    </div>
</div>

```

## 6.5.3. front

### 6.5.3.1. pages

#### 6.5.3.1.1. home.blade.php

```

@extends('layouts.front')

@section('content')
    @include('front.partials.home.welcome')
    @include('front.partials.home.about')
    @include('front.partials.home.trainers')
    @include('front.partials.home.prices')
    @include('front.partials.home.blog')
    @include('front.partials.home.contact')
    @include('front.partials.home.map')
@endsection

@section('homeNav')
    <li><a href="#welcome" class="smoothScroll">Home</a></li>
@endsection

@section('moreNav')
    @foreach($menus as $menu)
        <li><a href="{{ $menu->route }}" class="smoothScroll">{{ $menu->name }}</a></li>
    @endforeach
@endsection

@section('profileImage')
    @if(session()->has('user'))
        

        <form action="{{ url('/images/user/' . session('user')->id) }}"
        method="POST" enctype="multipart/form-data">
            @method('PATCH')
            @csrf
            <input id="imgUser" name="imgUser" class="hidden" type="file"
            onchange="this.form.submit();" />
        </form>

        <h6 class="text-center">Click image to update</h6>
        <hr/>
    @endif
@endsection

@section('moreJS')
    <script src="js/jquery.nav.js"></script>
    <script src="js/jquery.backstretch.min.js"></script>

    <script
    src="https://maps.googleapis.com/maps/api/js?key=AIzaSyBVHsEpU4NGN1fknIQtdGTD
    YXKrCNnEfK&callback=initMap" async="" defer=""></script>

    <script>
        $(function(){
            jQuery(document).ready(function() {
                $('#welcome').backstretch([

                    @foreach($sliders as $slider)
                        "{{ $slider->image }}"
                    @endforeach
                ])
            })
        })
    </script>

```



```

        ], {duration: 2000, fade: 750});
    });
});
</script>
@endsection

```

#### 6.5.3.1.2. post.blade.php

```

@extends('layouts.front')

@section('content')
    @include('front.partials.post.header')

    <section id="blog" class="parallax-section">
        <div class="container">
            <div class="row">
                <div class="col-md-12 col-sm-12">

                    @include('front.partials.post.content')
                    @include('front.partials.post.comments')
                    @include('front.partials.post.form')

                </div>
            </div>
        </div>
    </section>
@endsection

@section('homeNav')
    <li><a href="{{ url('/') }}">Home</a></li>
@endsection

@section('moreNav')
    <li><a href="#comments" class="smoothScroll">Comments</a></li>
@endsection

@section('moreCSS')
    <style>
        #blog-header {
            background: url('{{ asset($post->image) }}') 50% 0 repeat-y fixed;
        }
    </style>
@endsection

@section('moreJS')
    <script>
        const BASE_URL = "{{ url('/') }}";
        const TOKEN = "{{ csrf_token() }}";
    </script>
    <script src="{{ asset('js/ajax.js') }}"></script>
@endsection

```

### 6.5.3.1. partials

#### 6.5.3.1.1. common

##### 6.5.3.1.1.1. footer.blade.php

```
<footer>
  <div class="container">
    <div class="row">

      <div class="wow fadeInUp col-md-4 col-sm-4" data-wow-delay="0.6s">
        <br/>

        <div>
          <p>Address: 198 West 21th Street, Suite 721 New York NY
10016</p>
        </div>

        <div>
          <p>Phone: + 1235 2355 98</p>
        </div>

        <div>
          <p>Email: energyfitness@gmail.com</p>
        </div>

      </div>

      <div class="wow fadeInUp col-md-5 col-sm-4" data-wow-
delay="0.9s">
        <h2>Sessions</h2>
        <div>
          <h5>Morning</h5>
          <h4>6:00 AM - 11:00 PM</h4>
        </div>
        <div>
          <h5>Evening</h5>
          <h4>4:00 PM - 9:00 PM</h4>
        </div>
      </div>

      <div class="wow fadeInUp col-md-3 col-sm-4" data-wow-delay="1s">
        <h2>Follow us</h2>
        <ul class="social-icon">

          @foreach($socials as $social)
            <li><a href="{ { $social->url } }" class="fa fa-{{
$social->icon }} wow fadeInUp" data-wow-delay="1s"></a></li>
          @endforeach

        </ul>
      </div>
    </div>
  </div>
```

```

        <div class="clearfix"></div>

        <div class="col-md-12 col-sm-12">
            <p class="copyright-text">&copy; 2019 <a href="#" data-
toggle="modal" data-target="#author-modal">Jovan Ranković</a></p>
        </div>

        <!-- Author modal -->
        <div id="author-modal" class="modal fade" role="dialog">
            <div class="modal-dialog">
                <div class="modal-content">
                    <div class="modal-header">
                        <button type="button" class="close" data-
dismiss="modal"><span aria-hidden="true">x</span><span class="sr-
only">Close</span></button>
                        <h4 class="modal-title">Author</h4>
                    </div>
                    <div class="modal-body">
                        <br/>
                        <p class="text-center">Student: Jovan Ranković</p>
                        <p class="text-center">Index number: 145/14</p>
                        <p class="text-center">College: <a
href="https://en.ict.edu.rs/"><strong>ICT college of vocational
studies</strong></a></p>
                    </div>
                </div>
            </div>
        </div>
        <!-- Author modal END -->

    </div>
</div>
</footer>

```

#### 6.5.3.1.1.2. head.blade.php

```

<head>
    <title>Energy Fitness</title>
    <meta name="description" content="">
    <meta name="author" content="">
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=Edge">
    <meta name="viewport" content="width=device-width, initial-scale=1,
maximum-scale=1">
    <link rel="shortcut icon" href="{{ asset('images/favicon/energy.png') }}">

    <link rel="stylesheet" href="{{ asset('css/bootstrap.min.css') }}">
    <link rel="stylesheet" href="{{ asset('css/animate.css') }}">
    <link rel="stylesheet" href="{{ asset('css/font-awesome.min.css') }}">

    <!-- Main css -->
    <link rel="stylesheet" href="{{ asset('css/style.css') }}">

    <!-- Google Font -->

```

```

    <link
href='https://fonts.googleapis.com/css?family=Source+Sans+Pro:400,300,600'
rel='stylesheet' type='text/css'>
    <link href='https://fonts.googleapis.com/css?family=Lora:700italic'
rel='stylesheet' type='text/css'>

    @yield('moreCSS')
</head>

```

#### 6.5.3.1.1.3. nav.blade.php

```

<div class="navbar navbar-default navbar-fixed-top sticky-navigation"
role="navigation">
    <div class="container">

        <div class="navbar-header">
            <button class="navbar-toggle" data-toggle="collapse" data-
target=".navbar-collapse">
                <span class="icon icon-bar"></span>
                <span class="icon icon-bar"></span>
                <span class="icon icon-bar"></span>
            </button>
            <a href="{{ url('/') }}" class="navbar-brand">Energy</a>
        </div>
        <div class="collapse navbar-collapse">
            <ul class="nav navbar-nav navbar-right main-navigation">
                @yield('homeNav')
                @yield('moreNav')
                @if(session()->has('user'))

                    <li class="dropdown"><a href="#" data-toggle="dropdown"
class="dropdown-toggle">{{ session('user')->first_name }} <b
class="caret"></b></a>
                        <ul class="dropdown-menu">
                            <li><a href="#" data-toggle="modal" data-
target="#profile">Profile</a></li>

                            @if(session('user')->role->name == 'admin')
                                <li><a href="{{ url('/admin') }}">Admin</a></li>
                                <li><a href="{{ asset('files/php2_doc_145_14.pdf') }}">Documentation</a></li>
                            @endif

                            <li><a href="{{ url('/logout') }}">Logout</a></li>
                        </ul>
                    </li>

                    @else
                        <li><a href="#" data-toggle="modal" data-target=".log-
sign">Log in/Sign up</a></li>
                    @endif

                </ul>
            </div>

```

```

    </div>
</div>

@if(!session()->has('user'))
<!-- Log in/Sign up Modal -->
<div class="modal fade bs-modal-sm log-sign" id="myModal" tabindex="-1"
role="dialog" aria-labelledby="mySmallModalLabel" aria-hidden="true">
    <div class="modal-dialog modal-sm">
        <div class="modal-content">

            <div class="bs-example bs-example-tabs">
                <ul id="myTab" class="nav nav-tabs">
                    <li id="tab1" class="active tab-style login-shadow "><a
href="#signin" data-toggle="tab">Log In</a></li>
                    <li id="tab2" class=" tab-style "><a href="#signup" data-
toggle="tab">Sign Up</a></li>

                </ul>
            </div>
            <div class="modal-body">
                <div id="myTabContent" class="tab-content">

                    <!-- Login Form -->
                    <div class="tab-pane fade active in" id="signin">
                        <form class="form-horizontal" method="POST" action="{{
url('/login') }}">
                            <fieldset>
                                @csrf

                                <div class="group">
                                    <input class="input" type="text"
id="logEmail" name="logEmail" required /><span class="highlight"></span><span
class="bar"></span>
                                    <label class="label" for="logEmail">E-
mail</label>
                                </div>

                                <div class="group">
                                    <input class="input" type="password"
id="logPasswd" name="logPasswd" required /><span
class="highlight"></span><span class="bar"></span>
                                    <label class="label"
for="logPass">Password</label>
                                </div>
                                <em></em>

                                <div class="control-group">
                                    <label class="control-label"
for="signin"></label>
                                    <div class="controls">
                                        <button id="logBtn" name="logBtn"
class="btn btn-primary btn-block">Log In</button>
                                    </div>
                                </div>
                            </fieldset>
                        </form>
                    </div>
                </div>
            </div>
        </div>
    </div>
</div>

```

```

        <!-- Registration Form -->
        <div class="tab-pane fade" id="signup">
            <form class="form-horizontal" method="POST" action="{{
url('/register') }}">
                <fieldset>
                    @csrf
                    <div class="group">
                        <input class="input" type="text"
id="regFN" name="regFN" required /><span class="highlight"></span><span
class="bar"></span>
                        <label class="label" for="regFN">First
Name</label></div>
                        <div class="group">
                            <input class="input" type="text"
id="regLN" name="regLN" required /><span class="highlight"></span><span
class="bar"></span>
                            <label class="label" for="regLN">Last
Name</label></div>
                            <div class="group">
                                <input class="input" type="text"
id="email" name="email" required /><span class="highlight"></span><span
class="bar"></span>
                                <label class="label"
for="regEmail">Email</label></div>
                                <div class="group">
                                    <input class="input" type="password"
id="regPasswd" name="regPasswd" required /><span
class="highlight"></span><span class="bar"></span>
                                    <label class="label"
for="regPasswd">Password</label></div>
                                    <em></em>
                                    <div class="control-group">
                                        <label class="control-label"
for="signup"></label>
                                        <div class="controls">
                                            <button id="regBtn" name="regBtn"
class="btn btn-primary btn-block">Sign Up</button>
                                        </div>
                                    </div>
                                </fieldset>
                            </form>
                        </div>
                    </div>
                </div>
            </div>
        </div>
    <!-- Log in/Sign up Modal END -->
@endif

@if(session()->has('user'))
    <!-- Profile modal -->

```

```

<div id="profile" class="modal fade" role="dialog">
  <div class="modal-dialog">
    <div class="modal-content">
      <div class="modal-header">
        <button type="button" class="close" data-dismiss="modal"><span
aria-hidden="true">x</span><span class="sr-only">Close</span></button>
        <h4 class="modal-title">Profile</h4>
      </div>
      <div class="modal-body">

        @yield('profileImage')

        <h4 class="text-center">{{ session('user')->first_name }} {{
session('user')->last_name }}</h4>
        <hr/>

        @php
          $joined = new DateTime(session('user')->created_at);
          $now = new DateTime();

          $since = $now->diff($joined);
        @endphp

        <p class="text-center">Member for: <i>{{ ($since->y >
0)?$since->y.' years':'' }} {{ ($since->m > 0 && $since->m < 12)?$since->m.'
months':'' }} {{ ($since->m < 1)?(($since->d == 0)?$since->i.'
minutes':$since->d.' days')':'' }}</i></p>
        <p class="text-center">Comments: <i>{{ count(session('user')->
comments) }}</i></p>

        @if(session('user')->role->name == 'admin')
          <p class="text-center">Posts: <i>{{ count(session('user')->
posts) }}</i></p>
        @endif

      </div>
    </div>
  </div>
</div>
<!-- Profile modal END -->
@endif

```

#### 6.5.3.1.1.4. preloader.blade.php

```

<div class="preloader">
  <div class="sk-spinner sk-spinner-pulse"></div>
</div>

```

#### 6.5.3.1.1.5. scripts.blade.php

```

<script src="{{ asset('js/jquery.js') }}"></script>
<script src="{{ asset('js/bootstrap.min.js') }}"></script>

```

```

<script src="{{ asset('js/jquery.parallax.js') }}"></script>
<script src="{{ asset('js/smoothscroll.js') }}"></script>
@yield('moreJS')
<script src="{{ asset('js/wow.min.js') }}"></script>
<script src="{{ asset('js/custom.js') }}"></script>

```

#### 6.5.3.1.2. home

##### 6.5.3.1.2.1. about.blade.php

```

<section id="about" class="parallax-section">
    <div class="container">
        <div class="row">

            <div class="col-md-6 col-sm-12">
                
                <blockquote class="wow fadeInUp" data-wow-delay="1s">Take your
training to another level</blockquote>
            </div>

            <div class="col-md-1"></div>

            <div class="wow fadeInUp col-md-4 col-sm-12" data-wow-
delay="0.5s">
                <div class="about-detail">
                    <h2>About Energy</h2>
                    <p>We are long-running professional fitness club, with the
best environment and equipment.</p>
                    <p>Many years of experience lead us to the position to
offer you best of the best trainers.</p>
                    <a href="#trainers" class="btn btn-default
smoothScroll">Let us begin</a>
                </div>
            </div>

            <div class="col-md-1"></div>

        </div>
    </div>
</section>

```

##### 6.5.3.1.2.2. blog.blade.php

```

<section id="blog" class="parallax-section">
    <div class="container">
        <div class="row">

            <div class="col-md-12 col-sm-12 text-center">
                <h2>Fitness Blog</h2>
                <p>Read and comment on our newest posts</p>
            </div>
        </div>
    </div>

```



```

        </div>

        @foreach($posts as $post)

            <div class="wow fadeInUp col-md-6 col-sm-12" data-wow-
delay="0.9s">
                <div class="blog-thumb">
                    <span class="blog-date">{{ $post->created_at-
>format('d.m.Y.') }}</span>
                    <h3 class="blog-title"><a href="{{
url('/posts/'. $post->id) }}">{{ $post->title }}</a></h3>
                    <h5 id="blog-author">{{ $post->user->first_name }} {{
$post->user->last_name }}</h5>
                </div>
            </div>

        @endforeach

    </div>
</div>

    <div class="text-center">{{ $posts->links() }}</div>
</section>

```

#### 6.5.3.1.2.3. contact.blade.php

```

<section id="contact" class="parallax-section">
    <div class="container">
        <div class="row">

            <div class="wow fadeInUp col-md-offset-2 col-md-8 col-sm-offset-1
col-sm-10" data-wow-delay="0.9s">
                <h2>Contact Us</h2>
                <p>Ask us anything if you have any doubts</p>
                <div class="contact_detail">
                    <form action="{{ url('/contact') }}" method="POST"
id="contact-signup">
                        @csrf
                        <div class="col-md-6 col-sm-6">
                            <input name="conName" type="text" class="form-
control" id="conName" placeholder="Name" required />
                        </div>
                        <div class="col-md-6 col-sm-6">
                            <input name="conEmail" type="email" class="form-
control" id="conEmail" placeholder="E-mail" required />
                        </div>
                        <div class="col-md-6 col-sm-6">
                            <input name="conSubject" type="text" class="form-
control" id="conSubject" placeholder="Subject" required />
                        </div>
                        <div class="col-md-6 col-sm-6">
                            <textarea class="form-control" name="conMsg"
id="conMsg" placeholder="Message" required ></textarea>
                        </div>

```

```

        <div class="col-md-offset-3 col-md-6 col-sm-offset-2
col-sm-8">
            <input name="conBtn" type="submit" class="form-
control" id="conBtn" value="SEND MESSAGE">
        </div>
    </form>
</div>
</div>
</div>
</section>

```

#### 6.5.3.1.2.4. map.blade.php

```
<div id="map"></div>
```

#### 6.5.3.1.2.5. prices.blade.php

```

<section id="prices" class="parallax-section">
    <div class="container">
        <div class="row">

            <div class="wow fadeInUp col-md-12 col-sm-12" data-wow-
delay="0.9s">
                <h2>Our Prices</h2>
                <p>We offer the best prices in our area</p>
            </div>

            @foreach($prices as $price)

                <div class="wow fadeInUp col-md-4 col-sm-6" data-wow-
delay="1s">
                    <div class="pricing__item">
                        <h3 class="pricing__title">{{ $price->title }}</h3>
                        <div class="pricing__price"><span
class="pricing__currency">$</span>{{ $price->amount }}</div>
                        <ul class="pricing__feature-list">

                            @foreach($price->services as $pService)

                                <li class="pricing__feature">{{ $pService-
>name }}</li>

                            @endforeach

                        </ul>
                    </div>
                </div>
            </div>

            @endforeach

```

```

    </div>
  </div>
</section>

```

#### 6.5.3.1.2.6. trainers.blade.php

```

<section id="trainers" class="parallax-section">
  <div class="container">
    <div class="row">

      <div class="wow fadeInUp col-md-12 col-sm-12" data-wow-
delay="0.5s">
        <h2>Our Trainers</h2>
        <p>We present you the most professional and dedicated trainers
in NY</p>
      </div>

      @foreach($trainers as $trainer)

        <div class="wow fadeInUp col-md-4 col-sm-6" data-wow-
delay="0.5s">
          <div class="trainer-thumb">
            
            <div class="trainer-overlay">
              <div class="trainer-des">
                <h2>{{ $trainer->name }}</h2>
                <h3>{{ $trainer->workout }}</h3>
                <ul class="social-icon">

                  @foreach($trainer->socials as $tSocial)

                    <li><a href="{{ $tSocial->url }}"
class="fa fa-{{ $tSocial->icon }}" wow fadeInUp" data-wow-delay="1s"></a></li>

                  @endforeach

                </ul>
              </div>
            </div>
          </div>
          <p>{{ $trainer->description }}</p>
        </div>

      @endforeach

    </div>
  </div>
</section>

```

#### 6.5.3.1.2.7. welcome.blade.php

```

<section id="welcome" class="parallax-section">
  <div class="container">
    <div class="row">

      <div class="col-md-offset-1 col-md-10 col-sm-12">

        @isset($errors)
          @foreach($errors->all() as $error)
            <div class="alert alert-warning">
              {{ $error }}
            </div>
          @endforeach
        @endisset

        @if(session('message'))
          <h3 class="wow bounceIn" data-wow-delay="0.9s">{{
session('message') }}</h3>
        @else
          <h3 class="wow bounceIn" data-wow-delay="0.9s">Welcome to
the</h3>
        @endif

        <h1 class="wow fadeInUp" data-wow-
delay="1.6s">Energy<br>Fitness Club</h1>
        <a href="#about" class="wow fadeInUp smoothScroll btn btn-
default" data-wow-delay="2s">LEARN MORE</a>
      </div>
    </div>
  </section>

```

### 6.5.3.1.3. post

#### 6.5.3.1.3.1. comments.blade.php

```

<div class="blog-comment wow fadeInUp" id="comments" data-wow-delay="1s"
xmlns="http://www.w3.org/1999/html">
  <br/>
  <h3>{{ $post->comments->count() }} Comments</h3>

  @php($i=1)

  @foreach($post->comments as $comment)

    <div class="media">
      <div class="media-object pull-left col-md-2 col-sm-4 col-xs-3">
        
      </div>
      <div class="media-body">

        @if(session()->has('user'))

```

```

        @if(session('user')->id == $comment->user->id ||
session('user')->role_id == 1)

            <button type="button" class="close" aria-label="Close"
data-toggle="modal" data-target="#deleteWarning{{ $i }}">
                <span aria-hidden="true">&times;</span>
            </button>

            <div class="modal fade" id="deleteWarning{{ $i++ }}"
role="dialog">
                <div class="modal-dialog modal-sm text-center">
                    <div class="modal-content">
                        <div class="modal-body">
                            <button type="button" class="close"
data-dismiss="modal">
                                &times;
                            </button>
                            <h7>Are you sure?</h7>
                            <button type="button" class="btn btn-
default error" onclick="comment_delete({{ $post->id }}, {{ $comment->id }}, {{
$comment->user->id }}, '{{ $comment->content }}', '{{ $comment->user-
>first_name }}', '{{ $comment->user->last_name }}', '{{ $post->title }}');">
                                Delete
                            </button>
                        </div>
                    </div>
                </div>
            </div>
        @endif

        @if(session('user')->id == $comment->user->id)

            <button type="button" class="close" data-
toggle="modal" data-target="#edit{{ $i }}">
                <span aria-hidden="true"><i class="fa fa-
edit"></i></span>
            </button>

            <div class="modal fade" id="edit{{ $i++ }}"
role="dialog">
                <div class="modal-dialog modal-sm text-center">
                    <div class="modal-content">
                        <div class="modal-body">
                            <button type="button" class="close"
data-dismiss="modal">
                                &times;
                            </button>
                            <h7>Edit comment</h7>

                            <fieldset>

                                <div class="group">
                                    <textarea class="input"
type="text" id="editComment" name="editComment" required />{{ $comment-
>content }}</textarea><span class="highlight"></span><span class="bar"></span>
                                </div>

```

```

        <div class="control-group">
            <div class="controls">
                <button class="button
btn btn-primary btn-block" onclick="comment_update({{ $post->id }}, {{
$comment->id }}, {{ $comment->user->id }}, '{{ $comment->user->first_name }}',
'{{ $comment->user->last_name }}', '{{ $post->title }}');">
                    Edit
                </button>
            </div>
        </div>

    </fieldset>

</div>

</div>
</div>
</div>
</div>
@endif

@endif

        <h4 class="media-heading">{{ $comment->user->first_name }} {{
$comment->user->last_name }}</h4>
        <h5>{{ $comment->updated_at->format('d.m.Y. H:i') }}
@if($comment->updated_at != $comment->created_at) <i>(edited)</i> @endif</h5>
        <p>{{ $comment->content }}</p>
    </div>
</div>

@endforeach
</div>

```

#### 6.5.3.1.3.2. content.blade.php

```

<div class="blog-content wow fadeInUp" data-wow-delay="1s">
    <span>{{ $post->created_at->format('d.m.Y.') }}</span>
    <span class="meta-author">{{ $post->user->first_name }} {{ $post->user-
>last_name }}</span>
    <div class="blog-clear"></div>
    <p id="post-content">{{ $post->content }}</p>
</div>

```

#### 6.5.3.1.3.3. form.blade.php

```

@if(session()->has('user'))
    <div class="blog-comment-form wow fadeInUp" data-wow-delay="1s">
        <h3>Leave a comment</h3>
        <form action="#" method="POST" id="comment-form">
            @csrf
            <div class="col-md-12 col-sm-12">

```

```

        <textarea class="form-control" placeholder="Message" rows="5"
name="commentMsg" id="commentMsg" required ></textarea>
    </div>

    <input name="postId" type="hidden" class="form-control"
id="postId" value="{{ $post->id }}" />

    <input name="loggedUserId" type="hidden" class="form-control"
id="loggedUserId" value="{{ session('user')->id }}" />

    <input type="hidden" name="postTitle" class="form-control"
id="postTitle" value="{{ $post->title }}">

    <input type="hidden" name="loggedUserFN" class="form-control"
id="loggedUserFN" value="{{ session('user')->first_name }}" />

    <input type="hidden" name="loggedUserLN" class="form-control"
id="loggedUserLN" value="{{ session('user')->last_name }}" />

    <div class="col-md-3 col-sm-3">
        <input name="commentBtn" type="submit" class="form-control"
id="commentBtn" value="Submit">
    </div>

</form>
</div>
@else
    <div class="blog-comment-form wow fadeInUp" data-wow-delay="1s">
        <h3>You must <a href="#" data-toggle="modal" data-target=".log-
sign">log in</a> to comment.</h3>
    </div>
@endif

```

#### 6.5.3.1.3.4. header.blade.php

```

<section id="blog-header" class="parallax-section">
    <div class="container">
        <div class="row">

            <div class="col-md-offset-2 col-md-8 col-sm-12">
                <h3 class="wow bounceIn" data-wow-delay="0.9s">{{ $post->title
}}</h3>
            </div>

        </div>
    </div>
</section>

```

#### 6.5.4. layouts

#### 6.5.4.1. admin.blade.php

```
<!DOCTYPE html>
<html lang="en">
  @include('admin.partials.common.head')
  <body class="theme-light-blue">
    @include('admin.partials.common.loader')
    @include('admin.partials.common.nav')
    @include('admin.partials.common.sidebar')

    <section class="content" id="content">
      <div class="container-fluid">
        <div class="row">
          <div class="col-lg-12 col-md-12 col-sm-12 col-xs-12">
            <div class="card">
              <div class="header">
                <h2>
                  @yield('header')
                </h2>
              </div>

              @yield('content')
            </div>
          </div>
        </div>
      </div>
    </section>

    @include('admin.partials.common.scripts')
  </body>
</html>
```

#### 6.5.4.2. front.blade.php

```
<!DOCTYPE html>
<html lang="en">
  @include('front.partials.common.head')
  <body data-spy="scroll" data-target=".navbar-collapse" data-offset="50">
    @include('front.partials.common.preloader')
    @include("front.partials.common.nav")
    @yield('content')
    @include("front.partials.common.footer")
    @include("front.partials.common.scripts")
  </body>
</html>
```

### 6.6. Routes (web.php)

```
<?php
```



```

Route::namespace('Home')->group(function () {
    Route::get('/', 'FrontendController@home');
    Route::post('/contact', 'FrontendController@contact');
    Route::patch('/images/user/{user}', 'FrontendController@image_update');
    Route::get('/admin', 'AdminController@home')->middleware('admin');
});

Route::namespace('MyAuth')->group(function () {
    Route::post('/login', 'LoginController@login');
    Route::get('/logout', 'LoginController@logout');
});

Route::group(['namespace' => 'MyAuth', 'prefix' => 'register'], function () {
    Route::post('/', 'RegisterController@register');
    Route::get('/{remember_token}', 'RegisterController@activate');
});

Route::group(['namespace' => 'Resource', 'prefix' => 'posts'], function () {
    Route::get('/{post}', 'PostController@show');
    Route::resource('{post}/comments', 'CommentController')->except(['show',
    'index', 'create', 'edit']);
});

Route::group(['namespace' => 'Resource', 'prefix' => 'admin', 'middleware' =>
    'admin'], function () {
    Route::resource('/users', 'UserController')->except('show');
    Route::resource('/posts', 'PostController')->except('show');
    Route::resource('/sliders', 'SliderController')->except('show');
    Route::resource('/menus', 'MenuController')->except('show');
    Route::resource('/trainers', 'TrainerController')->except('show');
    Route::resource('/prices', 'PriceController')->except('show');
    Route::resource('/services', 'ServiceController')->except('show');
    Route::resource('/socials', 'SocialController')->except('show');
});

Route::fallback(function() {
    abort(404);
});

```