

HospitalFinder Data Model

Six tables behind the Flutter app and the admin dashboard: hospitals and their child records, a shared notifications table, and one profile per authenticated account.


6 application tables

2 schemas · public + auth

RLS enforced

Entity relationships

Solid edges are enforced foreign keys with `ON DELETE CASCADE`. Dashed edges are nullable references — the row survives if the user is removed. Only identifying and foreign-key columns are shown here; full column lists follow.

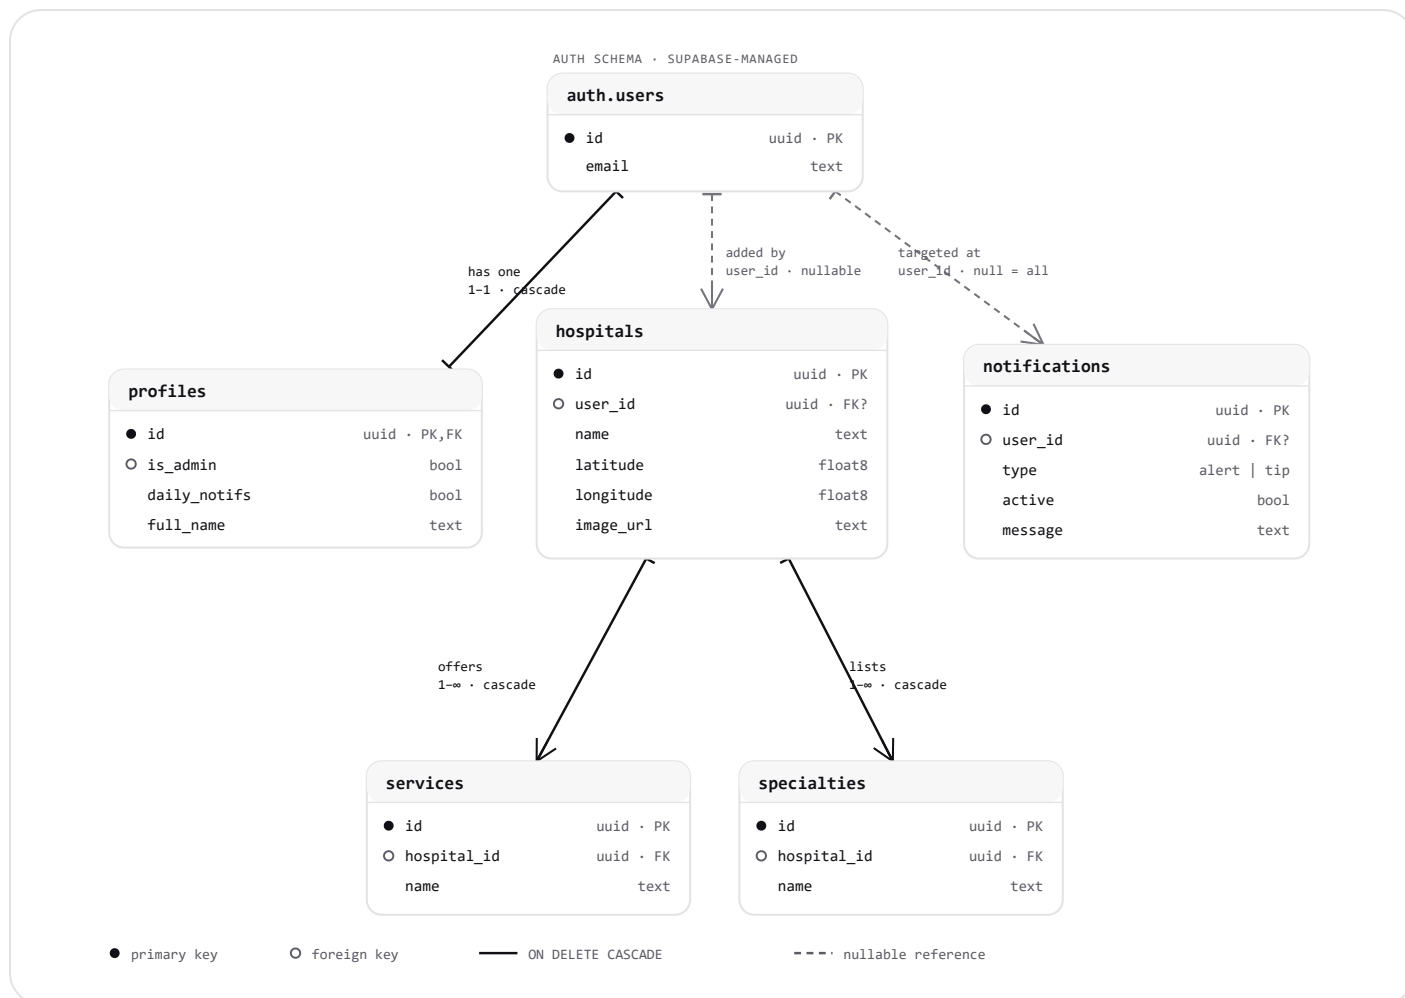

Every account gets one `profiles` row (created by a trigger on sign-up). A hospital owns its `services` and `specialties` rows — deleting the hospital removes them. `user_id` on `hospitals` and `notifications` is optional and not enforced as a constraint.

Table reference

Types as stored in Postgres. `timestampz` columns default to `now()`; `uuid` primary keys default to `gen_random_uuid()` unless noted.

hospitals

TABLE

COLUMN	TYPE	NOTES
id	uuid	PK
name	text	not null
address	text	free text, often includes phone
latitude	double precision	used for nearby search
longitude	double precision	used for nearby search
phone_number	text	tel / WhatsApp actions
diseases	text	comma-separated values
user_id	uuid	FK? → auth.users · nullable · “added by”
rating	numeric	nullable
review_count	integer	nullable
image_url	text	public URL from the <code>hospital-images</code> bucket
is_open	boolean	nullable
created_at	timestampz	default now()

services

TABLE

COLUMN	TYPE	NOTES
id	uuid	PK
hospital_id	uuid	FK → hospitals.id · not null · ON DELETE CASCADE
name	text	not null · e.g. “Maternity”
created_at	timestampz	default now()
index <code>services_hospital_id_idx</code> on (hospital_id)		

specialties

TABLE

COLUMN	TYPE	NOTES
id	uuid	PK
hospital_id	uuid	FK → hospitals.id · not null · ON DELETE CASCADE
name	text	not null · shown as “Doctors” in the app
created_at	timestamptz	default now()
index specialties_hospital_id_idx on (hospital_id)		

notifications

TABLE

COLUMN	TYPE	NOTES
id	uuid	PK
title	text	not null
message	text	not null
type	text	not null · default 'alert' · CHECK IN ('alert' , 'tip')
active	boolean	not null · default true
user_id	uuid	FK? → auth.users · nullable · null = shown to everyone
created_at	timestamptz	default now()
index notifications_type_idx on (type)		

profiles

TABLE

COLUMN	TYPE	NOTES
id	uuid	PK FK → auth.users.id · ON DELETE CASCADE
full_name	text	copied from auth metadata by the sign-up trigger
daily_notifications_enabled	boolean	not null · default true
is_admin	boolean	not null · default false · gates all admin writes
created_at	timestamptz	default now()
updated_at	timestamptz	default now()
trigger <code>on_auth_user_created</code> → <code>handle_new_user()</code> inserts a row per new account · RLS: self-access only (<code>auth.uid() = id</code>)		

auth.users

EXTERNAL

COLUMN	TYPE	NOTES
id	uuid	PK · referenced by profiles / hospitals / notifications
email	text	unique · used to sign in
raw_user_meta_data	jsonb	holds <code>full_name</code> passed at sign-up
managed by Supabase Auth — shown for reference, not created by the app		

health_tips

LEGACY

COLUMN	TYPE	NOTES
id	uuid	PK
created_at	timestamptz	default now()
Content	text	the tip body (capitalised column name)
Not referenced by the app — tips now live in <code>notifications</code> where <code>type = 'tip'</code> . Safe to drop.		

Relationships in words

- 1 **hospitals** → **services** — one hospital **offers** many services. FK `services.hospital_id`, ON DELETE CASCADE.
- 2 **hospitals** → **specialties** — one hospital **lists** many specialties (surfaced as “Doctors” in the app). FK `specialties.hospital_id`, ON DELETE CASCADE.
- 3 **auth.users** → **profiles** — each account has exactly one profile; they share the same primary key. ON DELETE CASCADE, and the row is created automatically by a trigger.
- 4 **auth.users** → **hospitals** — an admin who adds a hospital may be recorded in `hospitals.user_id`. Nullable; not enforced as a constraint.
- 5 **auth.users** → **notifications** — a notification may target a single user via `notifications.user_id`. When null, the app shows it to everyone.

Access & storage

- **Row-level security.** `hospitals`, `services`, `specialties` and `notifications` are readable by anyone; inserts, updates and deletes require `public.is_admin()`. `profiles` rows are visible only to their owner.
- **Storage.** The public bucket `hospital-images` holds uploaded photos; `hospitals.image_url` stores the resulting public URL — a plain value, not a foreign key.
- **One notifications table, two uses.** `type = 'alert'` feeds the in-app Alerts list; `type = 'tip'` with `active = true` feeds the daily 10 AM health-tip notification.