Development robustness: training size and sampling seed

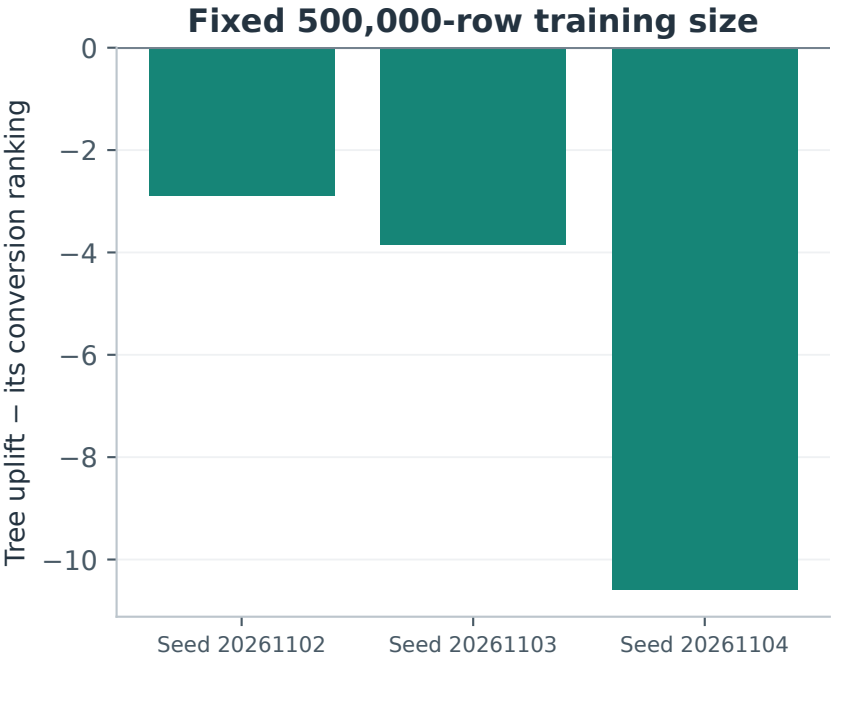

All panels use the same 500,000 validation rows. Seed changes the training subset, not the held-out test set.
Error bars capture validation evaluation noise only; three seeds do not estimate total training uncertainty.