

# 7: Crafting Reports

Environmental Data Analytics | John Fay & Luana Lima | Developed by Kateri Salk

Spring 2023

## Contents

|  |   |
|--|---|
| LESSON OBJECTIVES . . . . .                      | 1 |
| USE OF R STUDIO & R MARKDOWN SO FAR... . . . .   | 1 |
| BASIC R MARKDOWN DOCUMENT STRUCTURE . . . . .    | 1 |
| RESOURCES . . . . .                              | 2 |
| THE KNITTING PROCESS . . . . .                   | 2 |
| WHAT ELSE CAN R MARKDOWN DO? . . . . .           | 2 |
| WHY R MARKDOWN? . . . . .                        | 2 |
| TEXT EDITING CHALLENGE . . . . .                 | 3 |
| R CHUNK EDITING CHALLENGE . . . . .              | 4 |
| KNIT YOUR PDF . . . . .                          | 7 |
| OTHER R MARKDOWN CUSTOMIZATION OPTIONS . . . . . | 7 |

## LESSON OBJECTIVES

1. Describe the purpose of using R Markdown as a communication and workflow tool
2. Incorporate Markdown syntax into documents
3. Communicate the process and findings of an analysis session in the style of a report

## USE OF R STUDIO & R MARKDOWN SO FAR...

1. Write code
2. Document that code
3. Generate PDFs of code and its outputs
4. Integrate with Git/GitHub for version control

## BASIC R MARKDOWN DOCUMENT STRUCTURE

1. **YAML Header** surrounded by — on top and bottom
  - YAML templates include options for html, pdf, word, markdown, and interactive
  - More information on formatting the YAML header can be found in the cheat sheet

2. **R Code Chunks** surrounded by “on top and bottom + Create using Cmd/Ctrl+Alt+I”
  - Can be named {r name} to facilitate navigation and autoreferencing
  - Chunk options allow for flexibility when the code runs and when the document is knitted
3. **Text** with formatting options for readability in knitted document

## RESOURCES

Handy cheat sheets for R markdown can be found: [here](#), and [here](#).

There’s also a quick reference available via the **Help→Markdown Quick Reference** menu.

Lastly, this website give a great & thorough overview.

## THE KNITTING PROCESS

- The knitting sequence



- Knitting commands in code chunks:
  - `include = FALSE` - code is run, but neither code nor results appear in knitted file
  - `echo = FALSE` - code not included in knitted file, but results are
  - `eval = FALSE` - code is not run in the knitted file
  - `message = FALSE` - messages do not appear in knitted file
  - `warning = FALSE` - warnings do not appear...
  - `fig.cap = "..."` - adds a caption to graphical results

## WHAT ELSE CAN R MARKDOWN DO?

See: <https://rmarkdown.rstudio.com> and class recording.

- Languages other than R...
- Various outputs...

---

## WHY R MARKDOWN?

Fill in our discussion below with bullet points. Use italics and bold for emphasis (hint: use the cheat sheets or **Help →Markdown Quick Reference** to figure out how to make bold and italic text).

- R Markdown is limited to ~~one language~~ **many languages**
- (Add more bullets here)

## TEXT EDITING CHALLENGE

Create a table below that details the example datasets we have been using in class. The first column should contain the names of the datasets and the second column should include some relevant information about the datasets. (Hint: use the cheat sheets to figure out how to make a table in Rmd)

| File name                    | Description                |
|------------------------------|----------------------------|
| NWIS_SiteInfo_NE_RAW.csv     | NWIS Site Information      |
| NTL-LTER_Lake_Carbon_Raw.csv | NTL LTER Lake: Carbon data |

## R CHUNK EDITING CHALLENGE

### Installing packages

Create an R chunk below that installs the package `knitr`. Instead of commenting out the code, customize the chunk options such that the code is not evaluated (i.e., not run).

```
install('knitr')
```

### Setup

Create an R chunk below called “setup” that loads the packages `tidyverse`, `lubridate`, `here`, and `knitr` and sets a ggplot theme. Remember that you need to disable R throwing a message, which contains a check mark that cannot be knitted.

```
#Load packages
library(tidyverse)
library(lubridate)
library(knitr)
library(here)

#Set theme
my_theme <- theme_light() +
  theme(axis.line = element_line(color = "lightblue"))

theme_set(my_theme)
```

In a new code chunk named “load data”, load the `NTL-LTER_Lake_Nutrients_Raw` dataset, convert dates, display the head of the dataset, and set the date column to a date format. Customize the chunk options such that the code is run but is not displayed in the knitted document. The output, however, should be displayed.

```
##   lakeid  lakename year4 daynum sampledte depth_id depth tn_ug tp_ug nh34 no23
## 1      L Paul Lake 1991   140 1991-05-20         1  0.00  538   25  NA   NA
## 2      L Paul Lake 1991   140 1991-05-20         2  0.85  285   14  NA   NA
## 3      L Paul Lake 1991   140 1991-05-20         3  1.75  399   14  NA   NA
## 4      L Paul Lake 1991   140 1991-05-20         4  3.00  453   14  NA   NA
## 5      L Paul Lake 1991   140 1991-05-20         5  4.00  363   13  NA   NA
## 6      L Paul Lake 1991   140 1991-05-20         6  6.00  583   37  NA   NA
##   po4 comments
## 1   NA
## 2   NA
## 3   NA
## 4   NA
## 5   NA
## 6   NA
```

### Data Exploration, Wrangling, and Visualization

Create an R chunk below to create a processed dataset do the following operations:

- Include all columns except `lakeid`, `depth_id`, and `comments`

- Include only surface samples (depth = 0 m)
- Drop rows with missing data

```
#Wrangle the data
ntl.lter.processed <- ntl.lter.raw %>%
  select(-c(lakeid,depth_id,comments)) %>% #Subset columns
  filter(depth == 0) %>% #Select only surface samples
  drop_na() #Drop rows with missing data
```

Create a second R chunk to create a summary dataset with the mean, minimum, maximum, and standard deviation of total nitrogen concentrations for each lake. Create a second summary dataset that is identical except that it evaluates total phosphorus. Customize the chunk options such that the code is run but not displayed in the final document.

Create a third R chunk that uses the function `kable` in the `knitr` package to display two tables: one for the summary dataframe for total N and one for the summary dataframe of total P. Use the `caption = " "` code within that function to title your tables. Customize the chunk options such that the final table is displayed but not the code used to generate the table.

Table 2: Surface Samples: Total Nitrogen

| lakename          | mean_tn_ug | min_tn_ug | max_tn_ug | sd_tn_ug  |
|-------------------|------------|-----------|-----------|-----------|
| Central Long Lake | 690.0469   | 343.020   | 953.063   | 209.09341 |
| Crampton Lake     | 362.6813   | 353.380   | 376.304   | 12.05748  |
| East Long Lake    | 810.7834   | 380.620   | 2608.956  | 335.41457 |
| Hummingbird Lake  | 1036.6695  | 779.053   | 1221.960  | 204.36889 |
| Paul Lake         | 368.7564   | 45.670    | 628.625   | 106.34741 |
| Peter Lake        | 561.8752   | 219.720   | 2048.151  | 305.64909 |
| Tuesday Lake      | 423.5605   | 237.363   | 554.418   | 78.84522  |
| West Long Lake    | 762.6017   | 303.170   | 2870.302  | 402.95992 |

Table 3: Surface Samples: Total Phosphorous

| lakename          | mean_tp_ug | min_tp_ug | max_tp_ug | sd_tp_ug  |
|-------------------|------------|-----------|-----------|-----------|
| Central Long Lake | 21.70981   | 8.190     | 37.270    | 7.076388  |
| Crampton Lake     | 11.16033   | 5.803     | 15.555    | 4.946759  |
| East Long Lake    | 29.28984   | 8.000     | 101.050   | 17.375710 |
| Hummingbird Lake  | 36.21925   | 32.765    | 42.119    | 4.146717  |
| Paul Lake         | 10.45606   | 1.222     | 36.070    | 4.805142  |
| Peter Lake        | 18.39153   | 0.000     | 64.383    | 10.976205 |
| Tuesday Lake      | 11.71853   | 6.325     | 18.663    | 3.044289  |
| West Long Lake    | 19.82981   | 2.690     | 63.243    | 10.541276 |

Create a fourth and fifth R chunk that generates two plots (one in each chunk): one for total N over time with different colors for each lake, and one with the same setup but for total P. Decide which geom option will be appropriate for your purpose, and select a color palette that is visually pleasing and accessible. Customize the chunk options such that the final figures are displayed but not the code used to generate the figures. In addition, customize the chunk options such that the figures are aligned on the left side of the page. Lastly, add a `fig.cap` chunk option to add a caption (title) to your plot that will display underneath the figure.

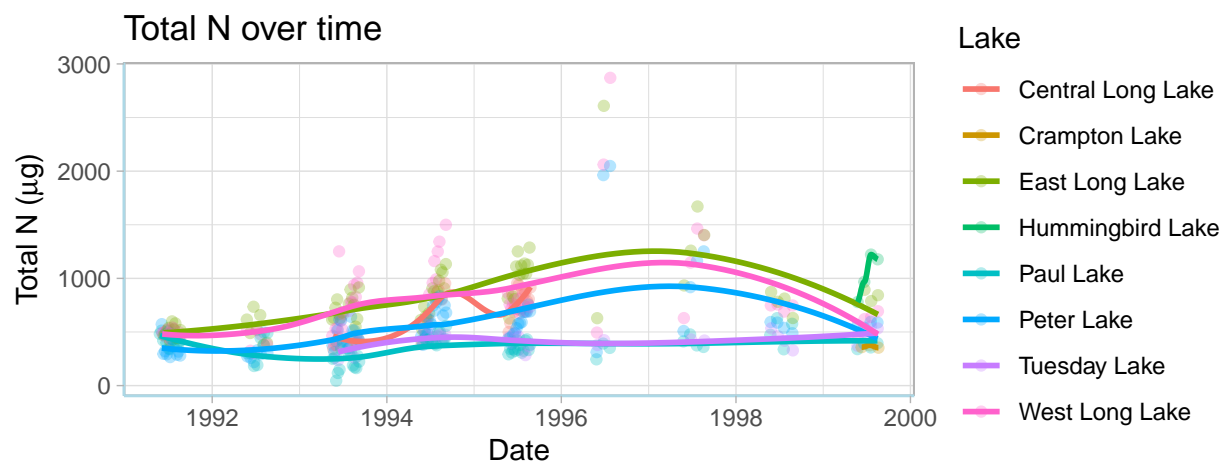


Figure 1: Total Nitrogen

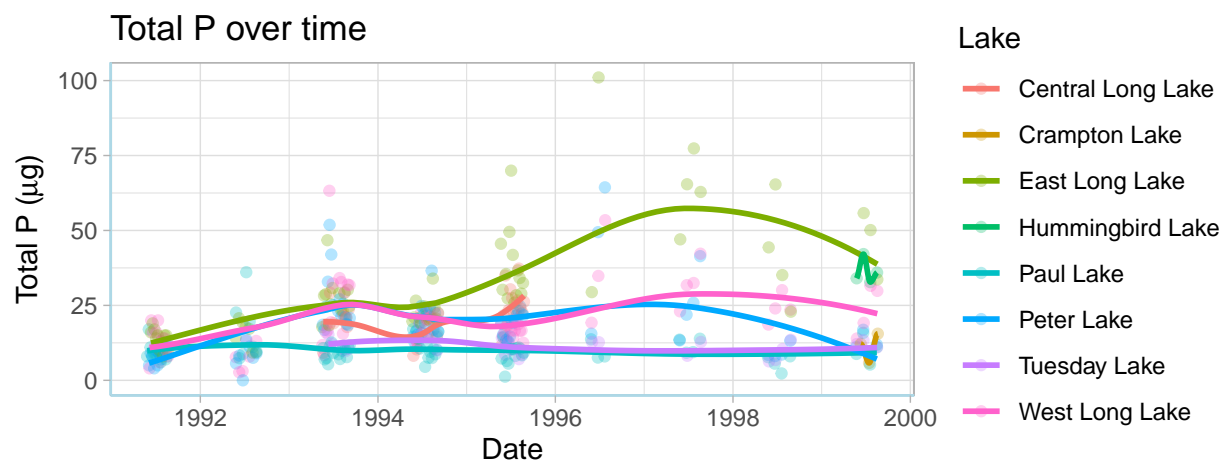


Figure 2: Total Phosphorous

## Communicating results

Write a paragraph describing your findings from the R coding challenge above. This should be geared toward an educated audience but one that is not necessarily familiar with the dataset. Then insert a horizontal rule below the paragraph. Below the horizontal rule, write another paragraph describing the next steps you might take in analyzing this dataset. What questions might you be able to answer, and what analyses would you conduct to answer those questions?

## KNIT YOUR PDF

When you have completed the above steps, try knitting your PDF to see if all of the formatting options you specified turned out as planned. This may take some troubleshooting.

## OTHER R MARKDOWN CUSTOMIZATION OPTIONS

We have covered the basics in class today, but R Markdown offers many customization options. A word of caution: customizing templates will often require more interaction with LaTeX and installations on your computer, so be ready to troubleshoot issues.

Customization options for pdf output include:

- Table of contents
- Number sections
- Control default size of figures
- Citations
- Template (more info here)

```
pdf_document:  
toc: true  
number_sections: true  
fig_height: 3  
fig_width: 4  
citation_package: natbib  
template:
```