


Juliana Pirolla

Wireshark Lab:

DNS v8.0

Supplement to *Computer Networking: A Top-Down Approach*, 8th ed., J.F. Kurose and K.W. Ross

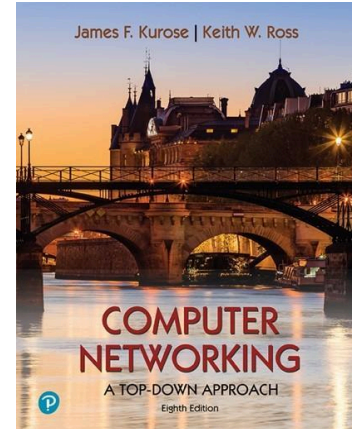

“Tell me and I forget. Show me and I remember. Involve me and I understand.” Chinese proverb

© 2005-2020, J.F. Kurose and K.W. Ross, All Rights Reserved

As described in Section 2.4 of the text¹, the Domain Name System (DNS) translates hostnames to IP addresses, fulfilling a critical role in the Internet infrastructure. In this lab, we’ll take a closer look at the client side of DNS. Recall that the client’s role in the DNS is relatively simple – a client sends a *query* to its local DNS server, and receives a *response* back. As shown in Figures 2.19 and 2.20 in the textbook, much can go on “under the covers,” invisible to the DNS clients, as the hierarchical DNS servers communicate with each other to either recursively or iteratively resolve the client’s DNS query. From the DNS client’s standpoint, however, the protocol is quite simple – a query is formulated to the local DNS server and a response is received from that server.

Before beginning this lab, you’ll probably want to review DNS by reading Section 2.4 of the text. In particular, you may want to review the material on **local DNS servers**, **DNS caching**, **DNS records and messages**, and the **TYPE field** in the DNS record.


1. nslookup

In this lab, we’ll make extensive use of the *nslookup* tool, which is available in most Linux/Unix and Microsoft platforms today. To run *nslookup* in Linux/Unix, you just type the *nslookup* command on the command line. To run it in Windows, open the Command Prompt and run *nslookup* on the command line.

In its most basic operation, *nslookup* tool allows the host running the tool to query any specified DNS server for a DNS record. The queried DNS server can be a root DNS server, a top-level-domain DNS server, an authoritative DNS server, or an intermediate DNS server (see the textbook for definitions of these terms). To accomplish this task, *nslookup* sends a DNS query to the specified DNS server, receives a DNS reply from that same DNS server, and displays the result.

¹ References to figures and sections are for the 8th edition of our text, *Computer Networks, A Top-down*

Approach, 8th ed., J.F. Kurose and K.W. Ross, Addison-Wesley/Pearson, 2020.

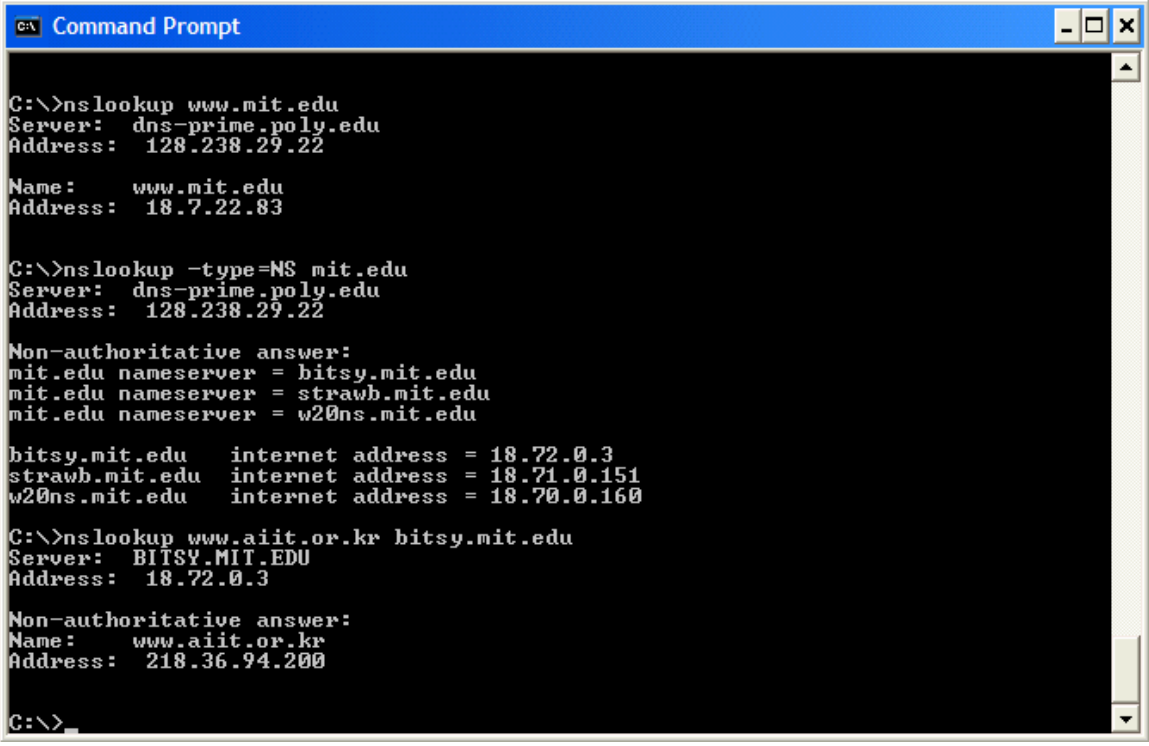

```
C:\>nslookup www.mit.edu
Server: dns-prime.poly.edu
Address: 128.238.29.22

Name: www.mit.edu
Address: 18.7.22.83

C:\>nslookup -type=NS mit.edu
Server: dns-prime.poly.edu
Address: 128.238.29.22

Non-authoritative answer:
mit.edu nameserver = bitsy.mit.edu
mit.edu nameserver = strawb.mit.edu
mit.edu nameserver = w20ns.mit.edu

bitsy.mit.edu internet address = 18.72.0.3
strawb.mit.edu internet address = 18.71.0.151
w20ns.mit.edu internet address = 18.70.0.160

C:\>nslookup www.aiit.or.kr bitsy.mit.edu
Server: BITSY.MIT.EDU
Address: 18.72.0.3

Non-authoritative answer:
Name: www.aiit.or.kr
Address: 218.36.94.200

C:\>
```

The above screenshot shows the results of three independent *nslookup* commands (displayed in the Windows Command Prompt). In this example, the client host is located on the campus of Polytechnic University in Brooklyn, where the default local DNS server is `dns-prime.poly.edu`. When running *nslookup*, if no DNS server is specified, then *nslookup* sends the query to the default DNS server, which in this case is `dns-prime.poly.edu`. Consider the first command:

```
nslookup www.mit.edu
```

In words, this command is saying “please send me the IP address for the host `www.mit.edu`”. As shown in the screenshot, the response from this command provides two pieces of information: (1) the name and IP address of the DNS server that provides the answer; and (2) the answer itself, which is the host name and IP address of `www.mit.edu`. Although the response came from the local DNS server at Polytechnic University, it is quite possible that this local DNS server iteratively contacted several other DNS servers to get the answer, as described in Section 2.4 of the textbook.

Now consider the second command:

```
nslookup -type=NS mit.edu
```

In this example, we have provided the option “`-type=NS`” and the domain “`mit.edu`”. This causes *nslookup* to send a query for a type-NS record to the default local DNS server. In words, the query is saying, “please send me the host names of the authoritative DNS for

mit.edu”. (When the `-type` option is not used, *nslookup* uses the default, which is to query for type A records.) The answer, displayed in the above screenshot, first indicates the DNS server that is providing the answer (which is the default local DNS server) along with three MIT nameservers. Each of these servers is indeed an authoritative DNS server for the hosts on the MIT campus. However, *nslookup* also indicates that the answer is “non-authoritative,” meaning that this answer came from the cache of some server rather than from an authoritative MIT DNS server. Finally, the answer also includes the IP addresses of the authoritative DNS servers at MIT. (Even though the type-NS query generated by *nslookup* did not explicitly ask for the IP addresses, the local DNS server returned these “for free” and *nslookup* displays the result.)

Now finally consider the third command:

```
nslookup www.aiit.or.kr bitsy.mit.edu
```

In this example, we indicate that we want the query sent to the DNS server `bitsy.mit.edu` rather than to the default DNS server (`dns-prime.poly.edu`). Thus, the query and reply transaction takes place directly between our querying host and `bitsy.mit.edu`. In this example, the DNS server `bitsy.mit.edu` provides the IP address of the host `www.aiit.or.kr`, which is a web server at the Advanced Institute of Information Technology (in Korea).

Now that we have gone through a few illustrative examples, you are perhaps wondering about the general syntax of *nslookup* commands. The syntax is:

```
nslookup -option1 -option2 host-to-find dns-server
```

In general, *nslookup* can be run with zero, one, two or more options. And as we have seen in the above examples, the `dns-server` is optional as well; if it is not supplied, the query is sent to the default local DNS server.

Now that we have provided an overview of *nslookup*, it is time for you to test drive it yourself. Do the following (and write down the results):

1. Run *nslookup* to obtain the IP address of a Web server in Asia. What is the IP address of that server?

```
[juliana@arch-e14]$ nslookup www.baidu.com
Server:      172.24.0.1
Address:     172.24.0.1#53

Non-authoritative answer:
www.baidu.com canonical name = www.a.shifen.com.
www.a.shifen.com canonical name = www.wshifen.com.
Name:   www.wshifen.com
Address: 103.235.46.115
Name:   www.wshifen.com
Address: 103.235.46.102
```

Address: 103.235.46.115

Address: 103.235.46.102

O comando `nslookup` consulta o sistema DNS (Domain Name System), cuja função é traduzir nomes de domínio (como `www.baidu.com`) em endereços IP, que são utilizados na comunicação entre máquinas na rede.

O resultado foi não autoritativo, o que significa que a resposta pode ter vindo de um servidor intermediário (cache), e não diretamente do servidor DNS oficial do domínio.

2. Run `nslookup` to determine the authoritative DNS servers for a university in Europe.

```
[juliana@arch-e14]$ nslookup -type=NS ox.ac.uk
Server:      172.24.0.1
Address:     172.24.0.1#53

Non-authoritative answer:
ox.ac.uk      nameserver = auth4.dns.ox.ac.uk.
ox.ac.uk      nameserver = auth5.dns.ox.ac.uk.
ox.ac.uk      nameserver = auth6.dns.ox.ac.uk.
ox.ac.uk      nameserver = dns0.ox.ac.uk.
ox.ac.uk      nameserver = dns2.ox.ac.uk.
ox.ac.uk      nameserver = dns1.ox.ac.uk.

Authoritative answers can be found from:
dns0.ox.ac.uk internet address = 129.67.1.190
dns1.ox.ac.uk internet address = 129.67.1.191
dns2.ox.ac.uk internet address = 163.1.2.190
auth4.dns.ox.ac.uk internet address = 45.33.127.156
auth5.dns.ox.ac.uk internet address = 93.93.128.67
auth6.dns.ox.ac.uk internet address = 185.24.221.32
auth4.dns.ox.ac.uk has AAAA address 2600:3c00:e000:19::1
auth5.dns.ox.ac.uk has AAAA address 2a00:1098:0:80:1000::10
auth6.dns.ox.ac.uk has AAAA address 2a02:2770:11:0:21a:4aff:febe:759b
```

Servidor DNS autoritativo: É o servidor oficial responsável por um domínio. Ele contém as informações originais e confiáveis sobre aquele domínio (registros A, MX, NS, etc.).

Resposta não autoritativa: Ocorre quando a resposta vem de um servidor que não é o dono do domínio, mas possui a informação armazenada em cache. Tal resposta continua sendo válida, apenas não veio da fonte oficial.

Autoritativo: consiste no servidor DNS da instituição oficial

- dns0.ox.ac.uk internet address = 129.67.1.190
- dns1.ox.ac.uk internet address = 129.67.1.191
- dns2.ox.ac.uk internet address = 163.1.2.190
- auth4.dns.ox.ac.uk internet address = 45.33.127.156
- auth5.dns.ox.ac.uk internet address = 93.93.128.67
- auth6.dns.ox.ac.uk internet address = 185.24.221.32
-

Não autoritativo

- ox.ac.uk nameserver = auth4.dns.ox.ac.uk.
- ox.ac.uk nameserver = auth5.dns.ox.ac.uk.
- ox.ac.uk nameserver = auth6.dns.ox.ac.uk.
- ox.ac.uk nameserver = dns0.ox.ac.uk.
- ox.ac.uk nameserver = dns2.ox.ac.uk.
- ox.ac.uk nameserver = dns1.ox.ac.uk.

```
[juliana@arch-e14]$ nslookup auth4.dns.ox.ac.uk.  
Server:          172.24.0.1  
Address:         172.24.0.1#53  
  
Non-authoritative answer:  
Name:   auth4.dns.ox.ac.uk  
Address: 45.33.127.156  
Name:   auth4.dns.ox.ac.uk  
Address: 2600:3c00:e000:19::1
```

3. Run *nslookup* so that one of the DNS servers obtained in Question 2 is queried for the mail servers for Yahoo! mail. What is its IP address?

```
[juliana@arch-e14]$ nslookup -type=MX yahoo.com dns2.ox.ac.uk  
Server:          dns2.ox.ac.uk  
Address:         163.1.2.190#53  
  
** server can't find yahoo.com: REFUSED
```

```
[juliana@arch-e14]$ nslookup -type=MX yahoo.com 8.8.8.8  
Server:          8.8.8.8  
Address:         8.8.8.8#53  
  
Non-authoritative answer:  
yahoo.com      mail exchanger = 1 mta7.am0.yahoodns.net.  
yahoo.com      mail exchanger = 1 mta6.am0.yahoodns.net.  
yahoo.com      mail exchanger = 1 mta5.am0.yahoodns.net.  
  
Authoritative answers can be found from:
```

```
[juliana@arch-e14]$ nslookup mta7.am0.yahoodns.net
Server:          172.24.0.1
Address:         172.24.0.1#53
```

```
Non-authoritative answer:
Name:   mta7.am0.yahoodns.net
Address: 67.195.228.106
Name:   mta7.am0.yahoodns.net
Address: 98.136.96.91
Name:   mta7.am0.yahoodns.net
Address: 67.195.204.79
Name:   mta7.am0.yahoodns.net
Address: 67.195.204.74
Name:   mta7.am0.yahoodns.net
Address: 67.195.204.72
Name:   mta7.am0.yahoodns.net
Address: 67.195.228.111
Name:   mta7.am0.yahoodns.net
Address: 98.136.96.74
Name:   mta7.am0.yahoodns.net
Address: 67.195.228.94
```


2. ipconfig

ipconfig (for Windows) and *ifconfig* (for Linux/Unix) are among the most useful little utilities in your host, especially for debugging network issues. Here we'll only describe *ipconfig*, although the Linux/Unix *ifconfig* is very similar. *ipconfig* can be used to show

your current TCP/IP information, including your address, DNS server addresses, adapter type and so on. For example, if you all this information about your host simply by entering

```
ipconfig /all
```

into the Command Prompt, as shown in the following screenshot.

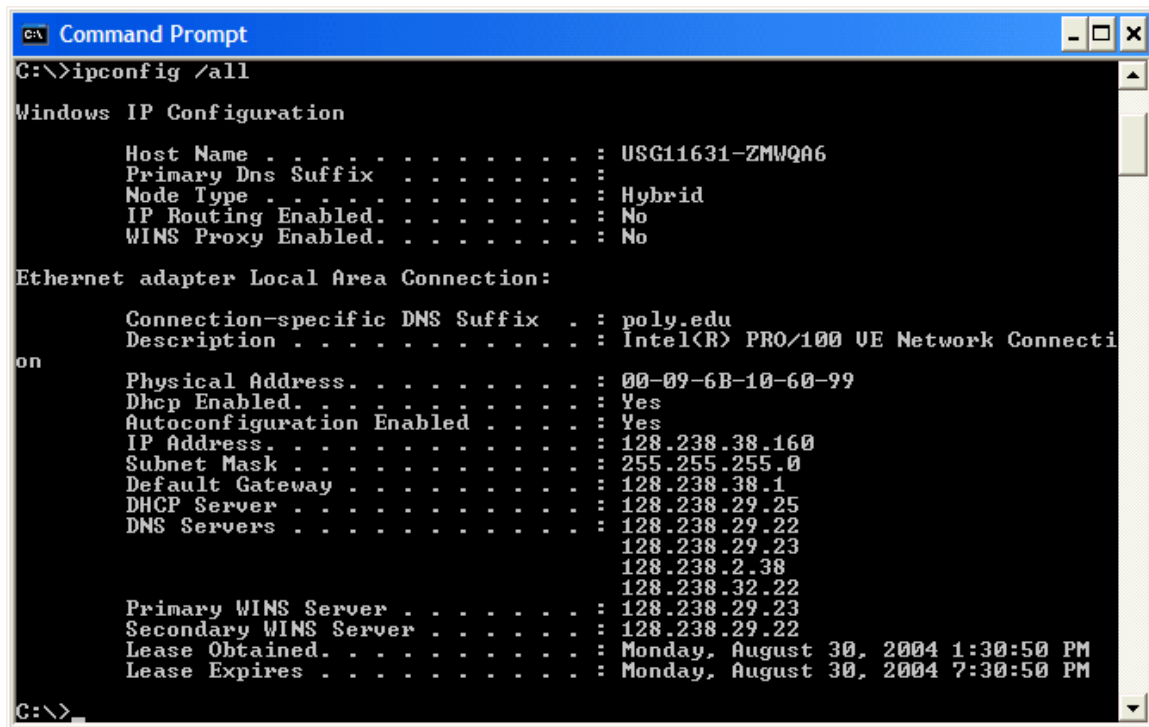

```
C:\>ipconfig /all

Windows IP Configuration

    Host Name . . . . . : USG11631-ZMWQA6
    Primary Dns Suffix . . . . . :
    Node Type . . . . . : Hybrid
    IP Routing Enabled. . . . . : No
    WINS Proxy Enabled. . . . . : No

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix . : poly.edu
    Description . . . . . : Intel(R) PRO/100 VE Network Connection
    Physical Address. . . . . : 00-09-6B-10-60-99
    Dhcp Enabled. . . . . : Yes
    Autoconfiguration Enabled . . . . : Yes
    IP Address. . . . . : 128.238.38.160
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 128.238.38.1
    DHCP Server . . . . . : 128.238.29.25
    DNS Servers . . . . . : 128.238.29.22
                          128.238.29.23
                          128.238.2.38
                          128.238.32.22
    Primary WINS Server . . . . . : 128.238.29.23
    Secondary WINS Server . . . . . : 128.238.29.22
    Lease Obtained. . . . . : Monday, August 30, 2004 1:30:50 PM
    Lease Expires . . . . . : Monday, August 30, 2004 7:30:50 PM

C:\>
```

ipconfig is also very useful for managing the DNS information stored in your host. In Section 2.5 we learned that a host can cache DNS records it recently obtained. To see these cached records, after the prompt C:\> provide the following command:

```
ipconfig /displaydns
```

Each entry shows the remaining Time to Live (TTL) in seconds. To clear the cache, enter


```
ipconfig /flushdns
```

Flushing the DNS cache clears all entries and reloads the entries from the hosts file.

3. Tracing DNS with Wireshark

Now that we are familiar with *nslookup* and *ipconfig*, we're ready to get down to some serious business. Let's first capture the DNS packets that are generated by ordinary Web-surfing activity.


- Use *ipconfig* to empty the DNS cache in your host.
- Open your browser and empty your browser cache. (With Internet Explorer, go to Tools menu and select Internet Options; then in the General tab select Delete Files.)
- Open Wireshark and enter "ip.addr == your_IP_address" into the filter, where you obtain your_IP_address with ipconfig. This filter removes all packets that neither originate nor are destined to your host.
- Start packet capture in Wireshark.
- With your browser, visit the Web page: <http://www.ietf.org>
- Stop packet capture.

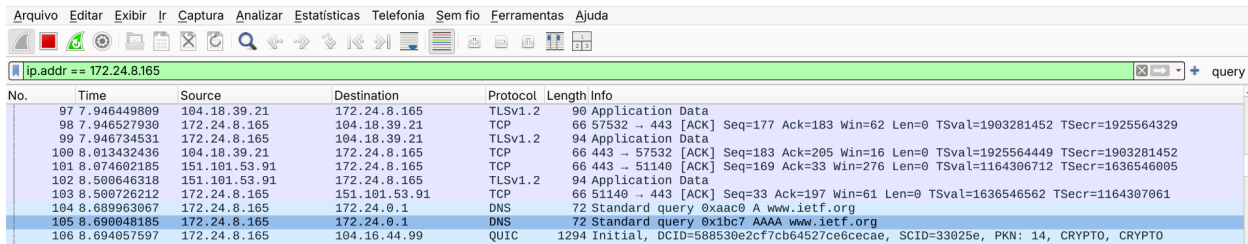

No.	Time	Source	Destination	Protocol	Length	Info
97	7.946449809	104.18.39.21	172.24.8.165	TLSv1.2	90	Application Data
98	7.946527930	172.24.8.165	104.18.39.21	TCP	66	57532 → 443 [ACK] Seq=177 Ack=183 Win=62 Len=0 TSval=1903281452 TSecr=1925564329
99	7.946734531	172.24.8.165	104.18.39.21	TLSv1.2	94	Application Data
100	8.013432436	104.18.39.21	172.24.8.165	TCP	66	443 → 57532 [ACK] Seq=183 Ack=205 Win=16 Len=0 TSval=1925564449 TSecr=1903281452
101	8.074602185	151.101.53.91	172.24.8.165	TCP	66	443 → 51140 [ACK] Seq=169 Ack=33 Win=276 Len=0 TSval=1164306712 TSecr=1636546085
102	8.500646318	151.101.53.91	172.24.8.165	TLSv1.2	94	Application Data
103	8.509726212	172.24.8.165	151.101.53.91	TCP	66	51140 → 443 [ACK] Seq=33 Ack=197 Win=61 Len=0 TSval=1636546562 TSecr=1164307061
104	8.689963067	172.24.8.165	172.24.0.1	DNS	72	Standard query 0xaac0 A www.ietf.org
105	8.690048185	172.24.8.165	172.24.0.1	DNS	72	Standard query 0x1bc7 AAAA www.ietf.org
106	8.694057597	172.24.8.165	104.16.44.99	QUIC	1294	Initial, DCID=588530e2cf7cb64527ce6cecae, SCID=33025e, PKN: 14, CRYPTO, CRYPTO

If you are unable to run Wireshark on a live network connection, you can download a packet trace file that was captured while following the steps above on one of the author's computers². Answer the following questions. Whenever possible, when answering a question below, you should hand in a printout of the packet(s) within the trace that you used to answer the question asked. Annotate the printout³ to explain your answer. To print a packet, use *File->Print*, choose *Selected packet only*, choose *Packet summary line*, and select the minimum amount of packet detail that you need to answer the question.

4. Locate the DNS query and response messages. Are then sent over UDP or TCP?
- UDP

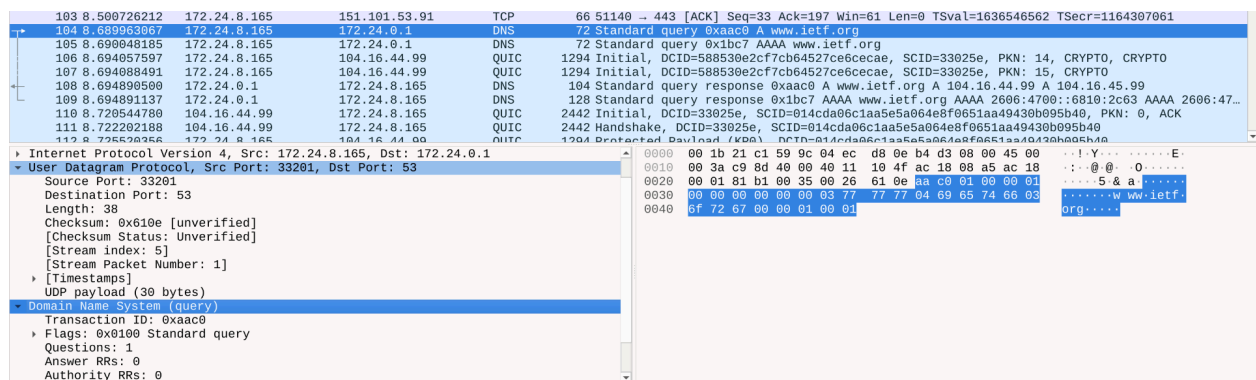

No.	Time	Source	Destination	Protocol	Length	Info
103	8.509726212	172.24.8.165	151.101.53.91	TCP	66	51140 → 443 [ACK] Seq=33 Ack=197 Win=61 Len=0 TSval=1636546562 TSecr=1164307061
105	8.690048185	172.24.8.165	172.24.0.1	DNS	72	Standard query 0x1bc7 AAAA www.ietf.org
106	8.694057597	172.24.8.165	104.16.44.99	QUIC	1294	Initial, DCID=588530e2cf7cb64527ce6cecae, SCID=33025e, PKN: 14, CRYPTO, CRYPTO
107	8.694088491	172.24.8.165	104.16.44.99	QUIC	1294	Initial, DCID=588530e2cf7cb64527ce6cecae, SCID=33025e, PKN: 15, CRYPTO
108	8.694899508	172.24.0.1	172.24.8.165	DNS	104	Standard query response 0xaac0 A www.ietf.org A 104.16.44.99 A 104.16.45.99
109	8.694891137	172.24.0.1	172.24.8.165	DNS	128	Standard query response 0x1bc7 AAAA www.ietf.org AAAA 2686:4700::6810:2c63 AAAA 2686:47...
110	8.720544788	104.16.44.99	172.24.8.165	QUIC	2442	Initial, DCID=814cda06c1aa5e5a064e8f0651aa49430b095b40, PKN: 0, ACK
111	8.722020188	104.16.44.99	172.24.8.165	QUIC	2442	Handshake, DCID=33025e, SCID=814cda06c1aa5e5a064e8f0651aa49430b095b40
112	8.725092766	172.24.8.165	104.16.44.99	QUIC	1294	Protected payload / rtp, nrtn=014fda06c1aa5e5a064e8f0651aa49430b095b40

Internet Protocol Version 4, Src: 172.24.8.165, Dst: 172.24.0.1

User Datagram Protocol, Src Port: 33201, Dst Port: 53

Source Port: 33201
Destination Port: 53
Length: 38
Checksum: 0x610e [unverified]
[Checksum Status: Unverified]
[Stream index: 5]
[Stream Packet Number: 1]
[Timestamps]
UDP payload (30 bytes)

Domain Name System (query)

Transaction ID: 0xaac0
Flags: 0x0100 Standard query
Questions: 1
Answer RRs: 0
Authority RRs: 0

5. What is the destination port for the DNS query message? What is the source

port of DNS response message?

- Porta de destino da query: **53**
- Porta de origem da resposta: **53**
- Porta de destino da resposta: **33201** (porta efêmera)

6. To what IP address is the DNS query message sent? Use ipconfig to determine the IP address of your local DNS server. Are these two IP addresses the same?
Pelo print do Wireshark, obtive
Internet Protocol Version 4, Src: 172.24.0.1 (dns), Dst: 172.24.8.165
User Datagram Protocol, Src Port: 53

A mensagem de consulta DNS é enviada para o endereço IP 172.24.0.1.


De acordo com o arquivo de configuração do sistema:

```
cat /etc/resolv.conf
```

o servidor DNS local também é 172.24.0.1.

Sim, os dois endereços são iguais.

7. Examine the DNS query message. What “Type” of DNS query is it? Does the query message contain any “answers”?
A mensagem de consulta DNS é do tipo A (Address) e AAAA, sendo utilizada para obter, respectivamente, os endereços IPv4 e IPv6 associados ao domínio consultado. Há 2 respostas.
8. Examine the DNS response message. How many “answers” are provided? What do each of these answers contain?
A mensagem de resposta DNS apresenta 2 respostas (Answer RRs: 2). Cada uma dessas respostas contém o nome do domínio consultado (www.ietf.org) e um endereço IP correspondente.

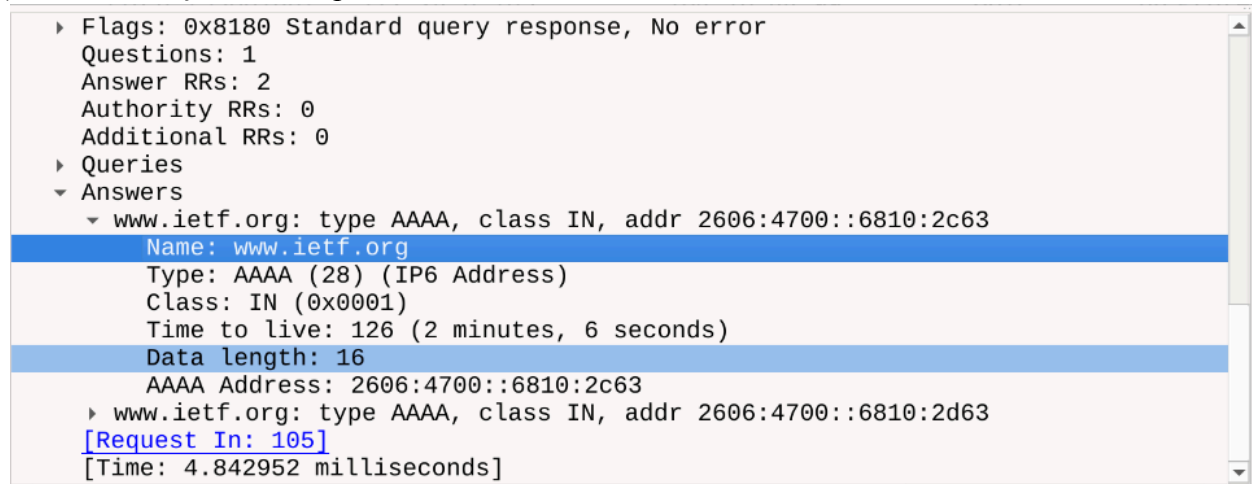

² Download the zip file <http://gaia.cs.umass.edu/wireshark-labs/wireshark-traces.zip> and extract the file dns-ethereal-trace-1. The traces in this zip file were collected by Wireshark running on one of the author's

computers, while performing the steps indicated in the Wireshark lab. Once you have downloaded the trace, you can load it into Wireshark and view the trace using the *File* pull down menu, choosing *Open*, and then selecting the dns-ethereal-trace-1 trace file.


³ What do we mean by “annotate”? If you hand in a paper copy, please highlight where in the printout you’ve found the answer and add some text (preferably with a colored pen) noting what you found in what you’ve highlight. If you hand in an electronic copy, it would be great if you could also highlight and annotate.

9. Consider the subsequent TCP SYN packet sent by your host. Does the destination IP address of the SYN packet correspond to any of the IP addresses provided in the DNS response message?
10. This web page contains images. Before retrieving each image, does your host issue new DNS queries?

Now let's play with *nslookup*⁴.

- Start packet capture.
- Do an *nslookup* on www.mit.edu
- Stop packet capture.

You should get a trace that looks something like the following:

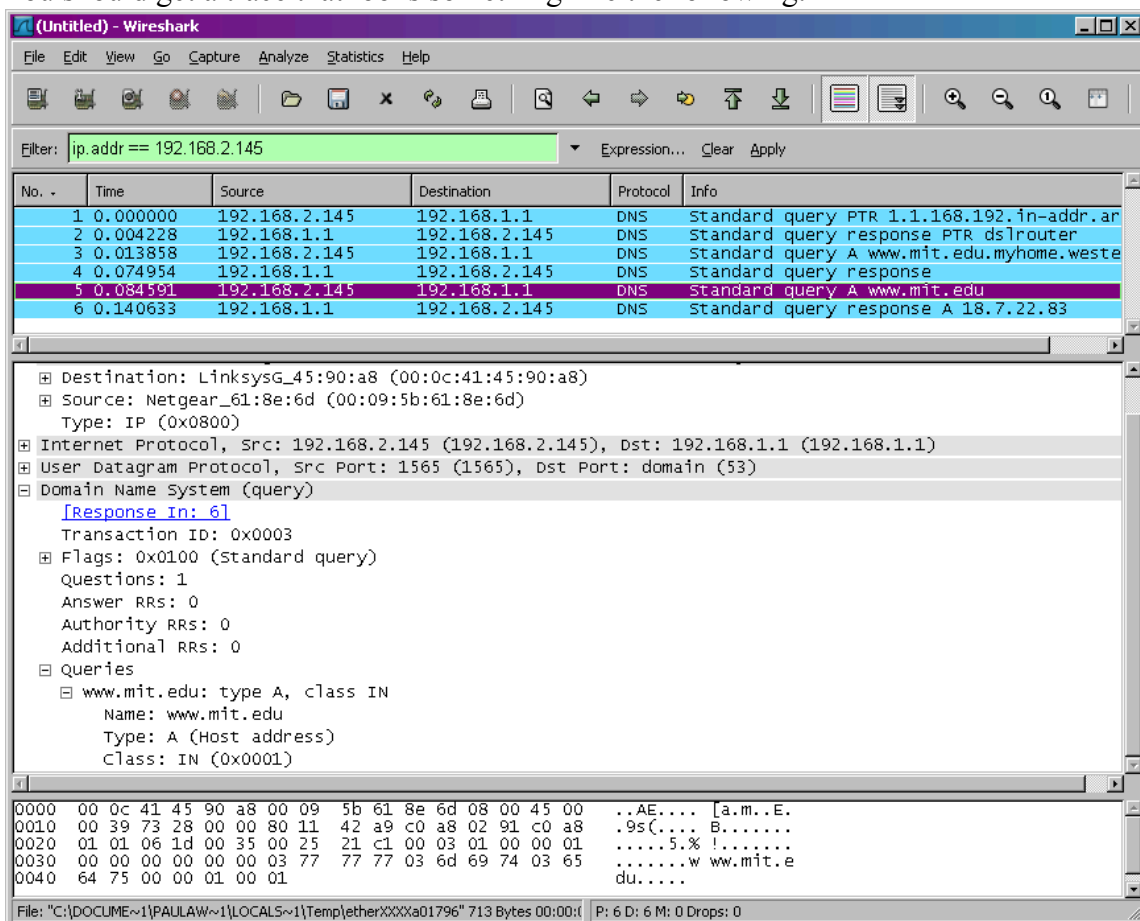

We see from the above screenshot that *nslookup* actually sent three DNS queries and received three DNS responses. For the purpose of this assignment, in answering the following questions, ignore the first two sets of queries/responses, as they are specific to *nslookup* and are not normally generated by standard Internet applications. You should instead focus on the last query and response messages.

⁴ If you are unable to run Wireshark and capture a trace file, use the trace file [dns-ethereal-trace-2](http://gaia.cs.umass.edu/wireshark-labs/wireshark-traces.zip) in the zip file <http://gaia.cs.umass.edu/wireshark-labs/wireshark-traces.zip>

11. What is the destination port for the DNS query message? What is the source port of DNS response message?
12. To what IP address is the DNS query message sent? Is this the IP address of your default local DNS server?
13. Examine the DNS query message. What “Type” of DNS query is it? Does the query message contain any “answers”?
14. Examine the DNS response message. How many “answers” are provided? What do each of these answers contain?
15. Provide a screenshot.

Now repeat the previous experiment, but instead issue the command:

```
nslookup -type=NS mit.edu
```

Answer the following questions⁵ :

16. To what IP address is the DNS query message sent? Is this the IP address of your default local DNS server?
17. Examine the DNS query message. What “Type” of DNS query is it? Does the query message contain any “answers”?
18. Examine the DNS response message. What MIT nameservers does the response message provide? Does this response message also provide the IP addresses of the MIT nameservers?
19. Provide a screenshot.

Now repeat the previous experiment, but instead issue the command:

```
nslookup www.aiit.or.kr bitsy.mit.edu
```

Answer the following questions⁶:

20. To what IP address is the DNS query message sent? Is this the IP address of your default local DNS server? If not, what does the IP address correspond to?
21. Examine the DNS query message. What “Type” of DNS query is it? Does the query message contain any “answers”?
22. Examine the DNS response message. How many “answers” are provided? What does each of these answers contain?
23. Provide a screenshot.

⁵ If you are unable to run Wireshark and capture a trace file, use the trace file dns-ethereal-trace-3 in the zip file <http://gaia.cs.umass.edu/wireshark-labs/wireshark-traces.zip>

⁶ If you are unable to run Wireshark and capture a trace file, use the trace file dns-ethereal-trace-4 in the zip file <http://gaia.cs.umass.edu/wireshark-labs/wireshark-traces.zip>