

Beamer Live Preview

A demo deck

Demo Author

October 6, 2026

Department of Examples
University of Somewhere

Basics

Lists and emphasis

- Plain text with **bold**, *emphasis*, **alerts** and `monospace`.
- Nested lists:
 - second level is `\small`
 - and uses the same bullet
- Enumerations:
 1. first
 2. second

- Revealed step by step

- Revealed step by step
- with `\pause`

- Revealed step by step
- with `\pause`
- and the preview shows step dots in the corner

Step three replaces it again.

- Inline $E(X) = \sum_i p(x_i) x_i$ and a user macro $\|x\|_2$.
- Display math:

$$\hat{\beta} = (X^T X)^{-1} X^T y$$

- Aligned equations:



$$f(x) = \frac{1}{\sigma\sqrt{2\pi}} e^{-\frac{(x-\mu)^2}{2\sigma^2}}$$

$$\sigma(x) = \frac{1}{1 + e^{-x}}$$

Columns and images

- Left: a PNG image
- Right: a PDF figure, rendered with pdf.js
- Sizes follow `width= / height=a`

^aFootnotes go to the bottom of the frame.

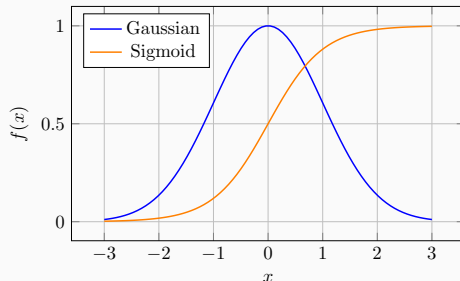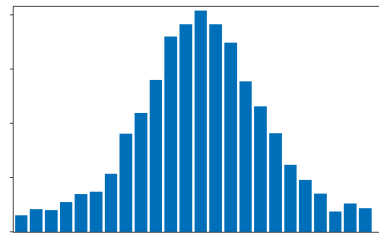

Block

A regular block with `block=fill`.

Alert block

Titles use the alert colour.

Example block


Titles use the `example text` colour.

Advanced

Model	Accuracy	F1
Logistic regression	0.91	0.88
Random forest	0.94	0.92
Gradient boosting	0.95	0.93

Table 1: Booktabs rules and a coloured row.

	Predicted +	Predicted –
Actual +	TP	FN
Actual –	FP	TN




- `tikzpicture` is compiled once in the background and cached.

Algorithm 1: K-Means(Dataset: D , Clusters: k)


```
1 begin
2   Choose  $k$  initial centroids;
3   repeat
4     Assign each point to its closest centroid;
5     Recompute each centroid as the mean of its points;
6   until centroids do not change;
7   return clusters;
8 end
```

the cat sat

- `\visible<n>` inside a picture: one compiled variant per overlay step.



- `\visible<n>` inside a picture: one compiled variant per overlay step.



- `\visible<n>` inside a picture: one compiled variant per overlay step.


```
import numpy as np  # keywords, comments and strings are highlighted

def softmax(z):
    e = np.exp(z - z.max())
    return e / e.sum()  # "numerically stable"
```

- [1] The beamer class
- [2] The metropolis theme
- [3] KaTeX

Verbatim

```
from sklearn.cluster import KMeans  
model = KMeans(n_clusters=3).fit(X)  
print(model.cluster_centers_)
```

Questions?