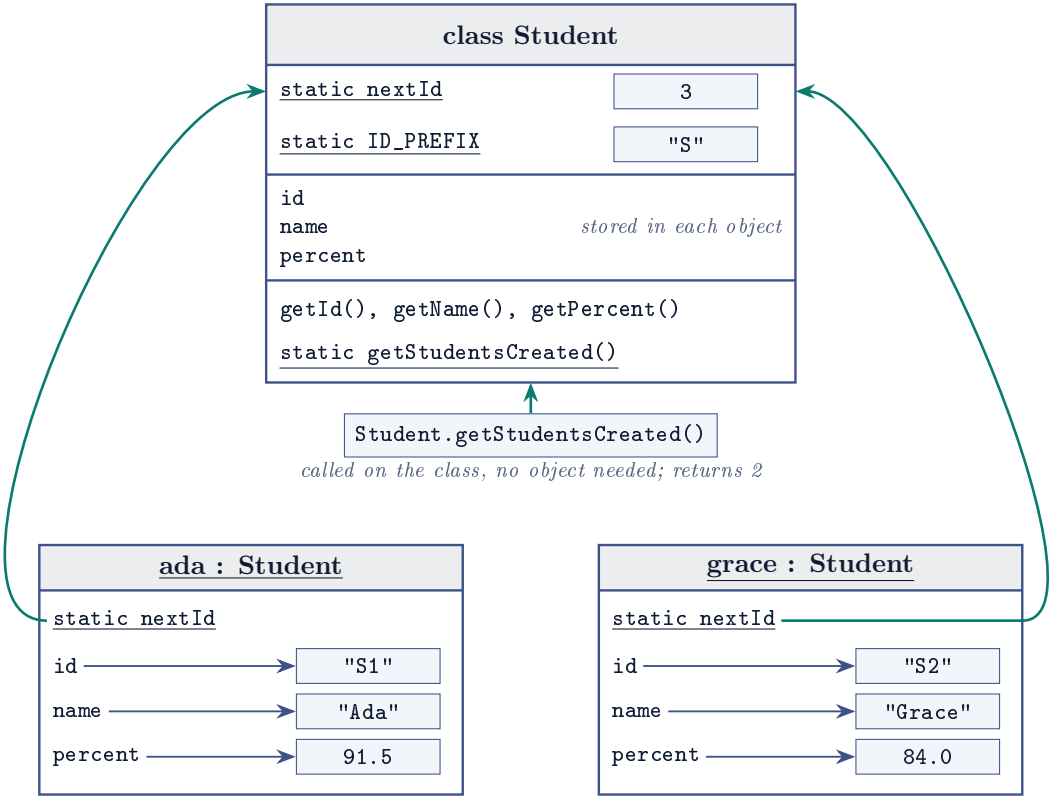
class Student
static nextId
3
static ID_PREFIX
"S"
id
name
percent
stored in each object
getId(), getName(), getPercent()
static getStudentsCreated()
Student.getStudentsCreated()
called on the class, no object needed; returns 2
ada : Student
static nextId
id
"S1"
name
"Ada"
percent
91.5
grace : Student
static nextId
id
"S2"
name
"Grace"
percent
84.0