

USO DE GIT

Download for Windows

[Click here to download](#) the latest (2.47.0) 64-bit version of Git for Windows. This is the most recent maintained build. It was released 17 days ago, on 2024-10-08.

Other Git for Windows downloads

Standalone Installer

[32-bit Git for Windows Setup.](#)

[64-bit Git for Windows Setup.](#)

Portable ("thumbdrive edition")

[32-bit Git for Windows Portable.](#)

[64-bit Git for Windows Portable.](#)

Using winget tool


Install [winget](#) tool if you don't already have it, then type this command in command prompt or Powershell.

```
winget install --id Git.Git -e --source winget
```


The current source code release is version 2.47.0. If you want the newer version, you can build it from [the source code](#).

Descargamos el git del windows:


Cuando se haya descargado, procedemos a la instalación. No tenemos que seleccionar nada que no esté predeterminado, por lo que le damos a next todo el tiempo, hasta llegar al final cuando le damos finish para terminar la instalación.

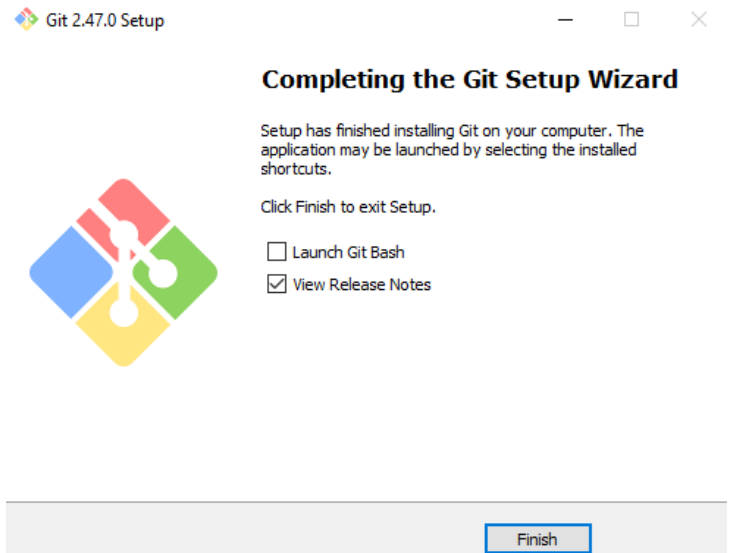



Abrimos el git bash, y creamos una carpeta para trabajar con el Git. Para crear un repositorio ponemos el comando: git init.

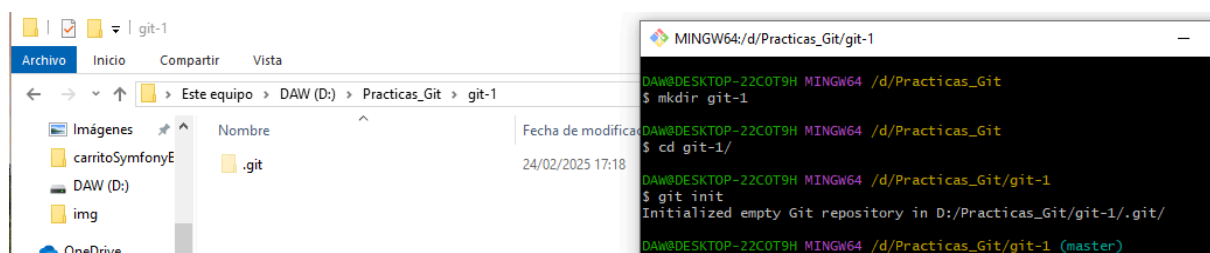

Para clonar un proyecto de GitHub copiamos la url del proyecto y ponemos el siguiente comando en git bash.

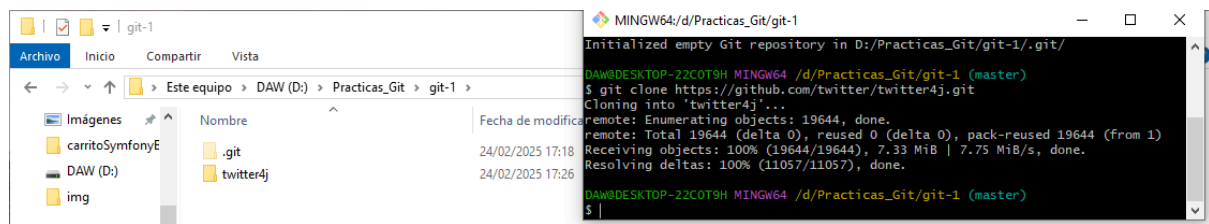

Creamos un archivo y vemos el estado de la rama master, con un 'git status'.

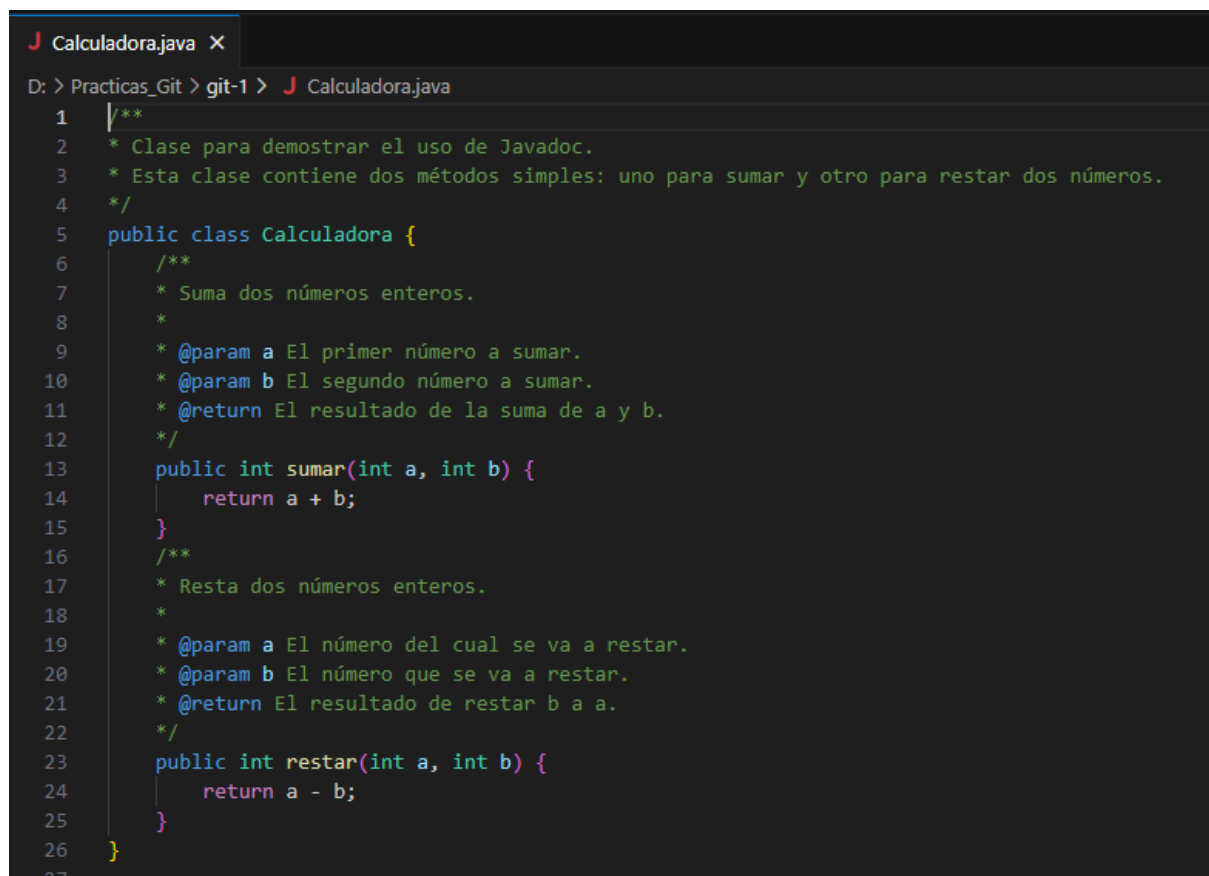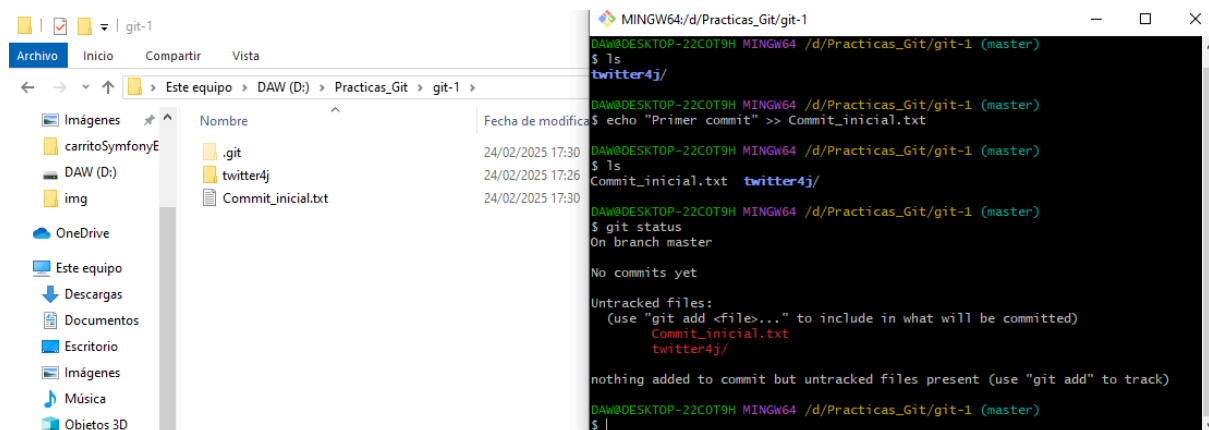

Generamos el javadoc: (Como en el ordenador del instituto no tenía el jdk instalado no me salía, así que lo dejé sin hacer y seguí con la tarea, por eso las siguientes capturas no aparece la carpeta docs).


```
judit@PC-Judit MINGW64 /d/DAW/Repositorio/2DAW/Tareas_git_Despliegue (main)
$ ls
Calculadora.java  Commit_inicial.txt  twitter4j/

judit@PC-Judit MINGW64 /d/DAW/Repositorio/2DAW/Tareas_git_Despliegue (main)
$ javac Calculadora.java


judit@PC-Judit MINGW64 /d/DAW/Repositorio/2DAW/Tareas_git_Despliegue (main)
$ javadoc -d docs Calculadora.java
Loading source file Calculadora.java...
Constructing Javadoc information...
Creating destination directory: "docs\"
Building index for all the packages and classes...
Standard Doclet version 18.0.2.1+1-1
Building tree for all the packages and classes...
Generating docs\Calculadora.html...
Calculadora.java:5: warning: use of default constructor, which does not provide
a comment
public class Calculadora {
    ^
Generating docs\package-summary.html...
Generating docs\package-tree.html...
Generating docs\overview-tree.html...
Building index for all classes...
Generating docs\allclasses-index.html...
Generating docs\allpackages-index.html...
Generating docs\index-all.html...
Generating docs\index.html...
Generating docs\help-doc.html...
1 warning

judit@PC-Judit MINGW64 /d/DAW/Repositorio/2DAW/Tareas_git_Despliegue (main)
$ ls
Calculadora.class  Calculadora.java  Commit_inicial.txt  docs/  twitter4j/
```

Nos vamos a GitHub y creamos un repositorio.

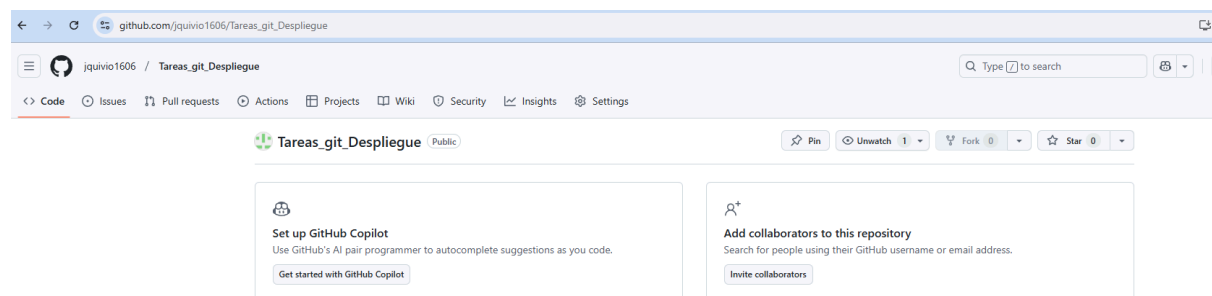

Hacemos un git add, y un commit para subir los archivos.

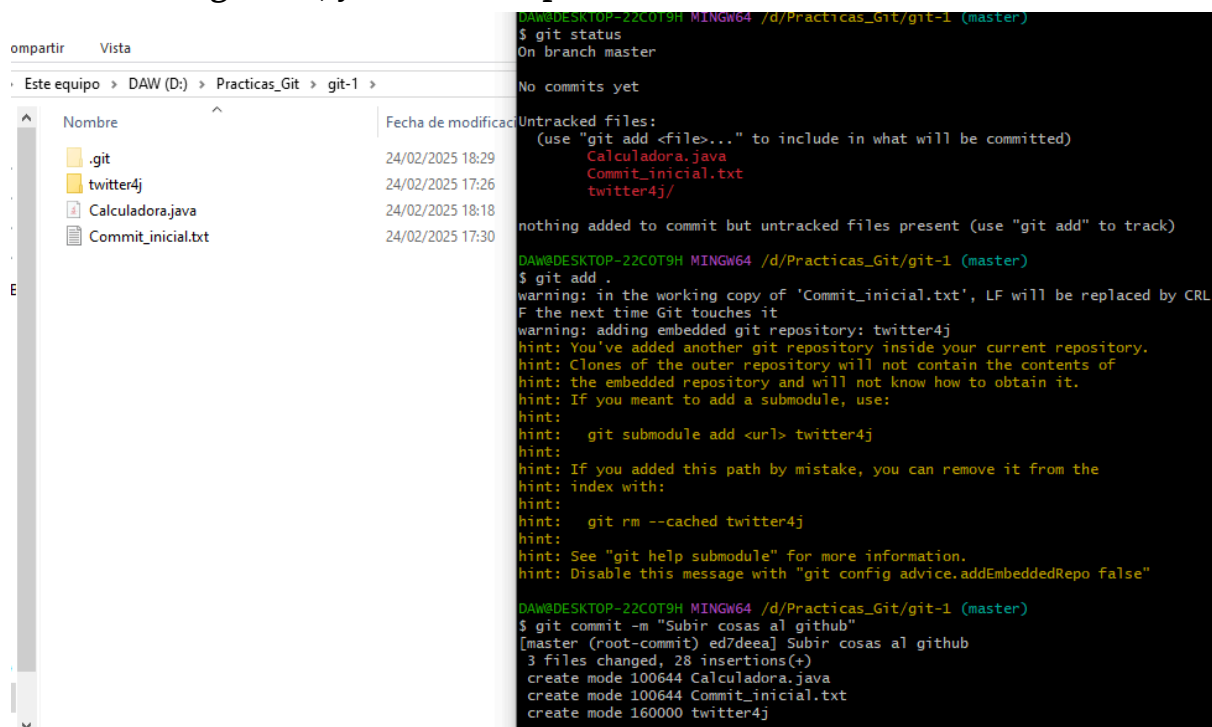

The image shows a Windows File Explorer window on the left and a terminal window on the right. The File Explorer shows the directory structure of a project named 'git-1' inside 'Practicas_Git' on the 'DAW (D:)' drive. It contains files: '.git', 'twitter4j', 'Calculadora.java', and 'Commit_inicial.txt'. The terminal window shows the following commands and output:

```
DAW@DESKTOP-22C0T9H MINGW64 /d/Practicas_Git/git-1 (master)
$ git status
On branch master

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    Calculadora.java
    Commit_inicial.txt
    twitter4j/

nothing added to commit but untracked files present (use "git add" to track)

DAW@DESKTOP-22C0T9H MINGW64 /d/Practicas_Git/git-1 (master)
$ git add .
warning: in the working copy of 'Commit_inicial.txt', LF will be replaced by CRLF the next time Git touches it
warning: adding embedded git repository: twitter4j
hint: You've added another git repository inside your current repository.
hint: Clones of the outer repository will not contain the contents of
hint: the embedded repository and will not know how to obtain it.
hint: If you meant to add a submodule, use:
hint:   git submodule add <url> twitter4j
hint: If you added this path by mistake, you can remove it from the
hint: index with:
hint:   git rm --cached twitter4j
hint: See "git help submodule" for more information.
hint: Disable this message with "git config advice.addEmbeddedRepo false"

DAW@DESKTOP-22C0T9H MINGW64 /d/Practicas_Git/git-1 (master)
$ git commit -m "Subir cosas al github"
[master (root-commit) ed7deea] Subir cosas al github
3 files changed, 28 insertions(+)
create mode 100644 Calculadora.java
create mode 100644 Commit_inicial.txt
create mode 160000 twitter4j
```

A continuación, ponemos estos 3 comandos:

```
DAW@DESKTOP-22C0T9H MINGW64 /d/Practicas_Git/git-1 (master)
$ git remote add origin git@github.com:jquivio1606/Tareas_git_Despliegue.git
```

Renombramos la rama de máster a main para subirlo a GitHub

```
DAW@DESKTOP-22C0T9H MINGW64 /d/Practicas_Git/git-1 (main)
$ git branch -M main
```

```
DAW@DESKTOP-22C0T9H MINGW64 /d/Practicas_Git/git-1 (main)
$ git push -u origin main
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 12 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (4/4), 608 bytes | 608.00 KiB/s, done.
Total 4 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com:jquivio1606/Tareas_git_Despliegue.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
```

Con estos comandos ya estarían subidas las cosas de nuestra carpeta a GitHub.

