
Memory sheet: Task 1.6 Implement prompt engineering strategies and governance for FM interactions

Domain 1, weight 31 percent. Read this sheet, then answer the flash questions aloud.

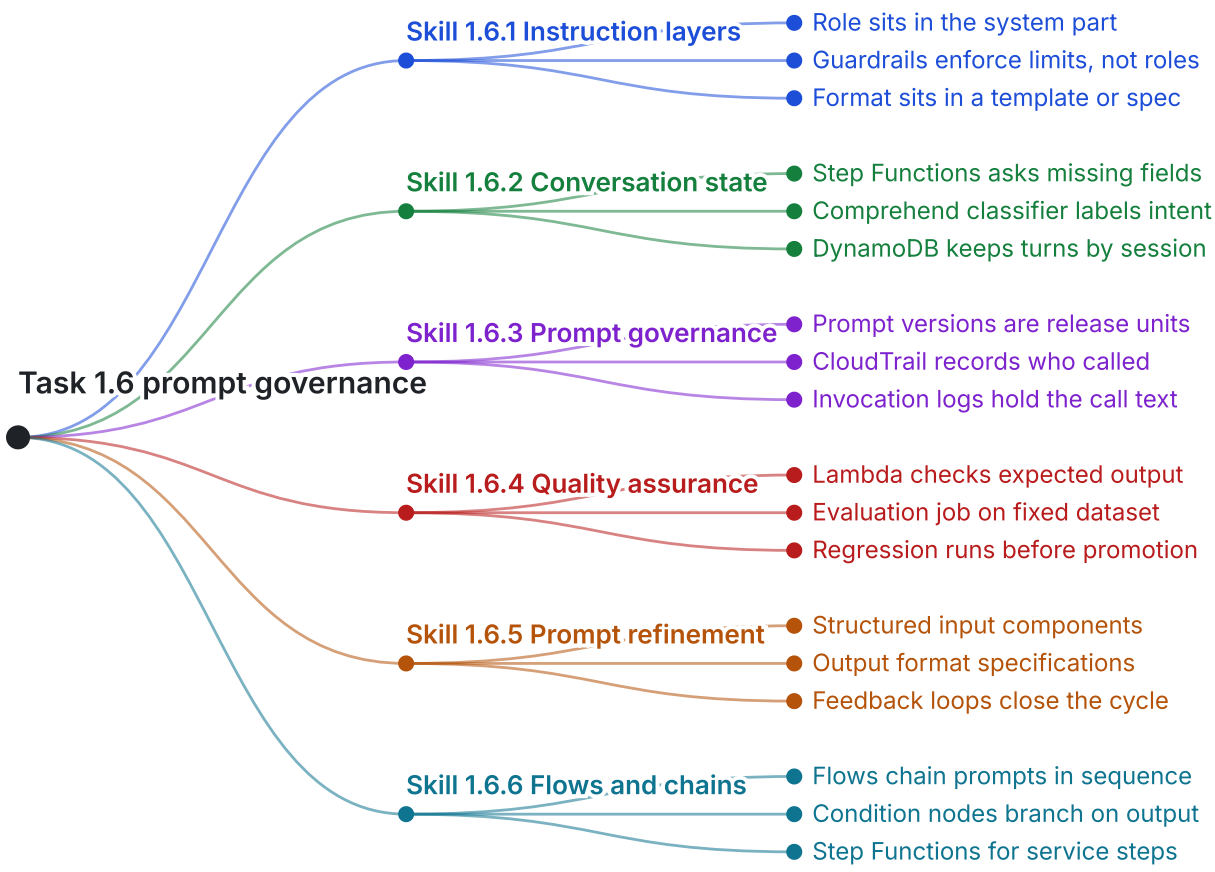

Deciding rules

When the stem says	Think of	Not when
"reused text", "template", or "variables"	Prompt Management version ARN	The job needs steps, branches, or waits, which Prompt Management does not run
"every call", "every request", or "before the model sees text"	Guardrail numbered version on the call, or a pre-step	A sample of traffic is enough, since a guardrail acts on every input and output
"wait", "approval", "retry", or "resume later"	Standard Step Functions workflow	A short high-volume run with no callback, which suits Express
"ordered prompt nodes" or "branch on a label"	Bedrock Flows with a condition node	The path is mostly service steps with waits, which points to Step Functions
"intent", "entity", "offset", or "PII"	Amazon Comprehend	The job is to check the model reply, which needs Guardrails
"earlier turns", "session", or "history"	DynamoDB items keyed by session and turn	Whole transcript files load as one object, which suits S3
"who", "when", or "which API"	CloudTrail management events	The auditor needs the words sent or returned, which invocation logs hold
"output must match a check" or "expected fields"	Lambda validator that fails the pipeline	The check only writes a log line, so the release does not stop

Etch lines

1. Read the last sentence first to learn what must change.
2. Production calls a numbered version ARN, never the working draft.
3. Guardrails run on each call, but a prompt sentence is only a request.
4. Editing the draft to roll back leaves no release record.
5. A flow has no approval node, so long human waits go to Step Functions.
6. Invocation logs hold prompt and reply text, while CloudTrail names the caller.

Flash questions

- Q: The production team wants a release that no draft edit can alter. Which reference should the app use? A: The numbered version ARN, not the working draft.
- Q: An app must stop replies that mention a blocked subject. Which managed control fits? A: A Bedrock guardrail on the call, pinned to a numbered version.
- Q: Which AWS service locates personal data in input text and gives character positions? A: Amazon Comprehend, through PII detection with begin and end offsets.
- Q: An approval path pauses for days while a person signs off. Which Step Functions type runs it? A: Standard, since it handles long waits for a person.
- Q: Inside a Bedrock flow, what node picks the path from a label the model returns? A: A condition node, which compares the prompt output with each label.

- Q: The prompt attack filter ignores a user message on InvokeModel. What did the team leave out? A: Input tags around the untrusted text, since the filter reads only tagged content.
- Q: An auditor asks who made an API call and when. Which record answers that? A: A CloudTrail management event, which records the caller and the time.
- Q: How can each logged reply show which prompt version produced it? A: Set requestMetadata to the version ARN on every call, so invocation logs carry it.

Source: The deciding constraint, Skills 1.6.1 to 1.6.6, Prompt versions and the path from dev to QA to production, Services and techniques in scope, X versus Y confusable pairs, Read a long question, Distractor patterns, and Drill. AWS docs and the study guide sections above, no practice-test text.