
Memory sheet: Task 3.3 Implement AI governance and compliance mechanisms

Domain 3, weight 20 percent. Read this sheet, then answer the flash questions aloud.

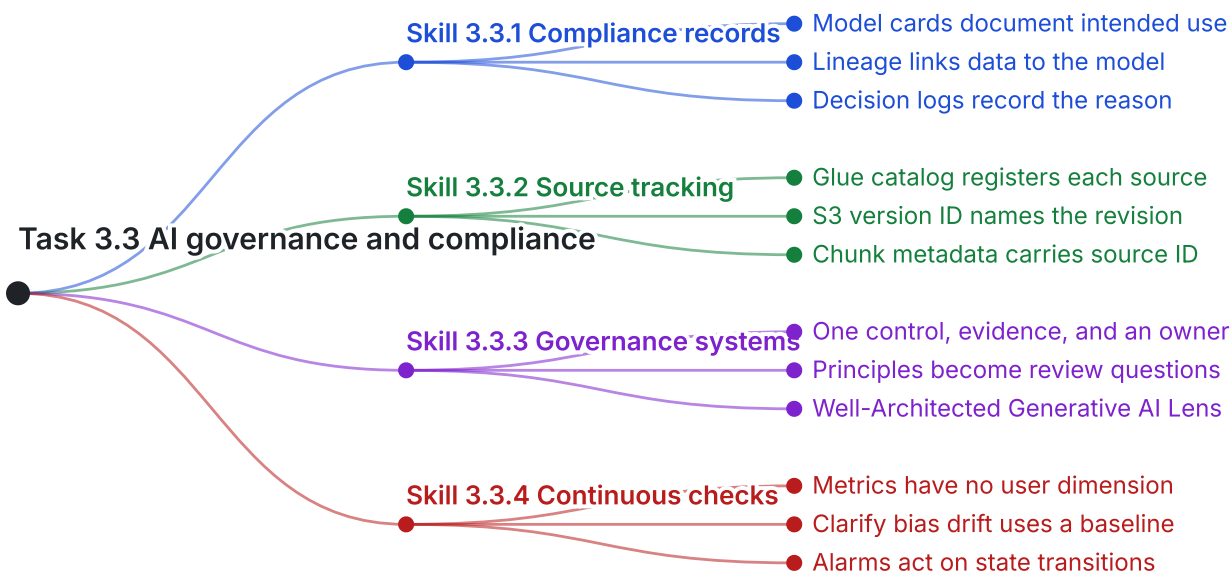

Deciding rules

When the stem says	Think of	Not when
Stop, mask, block, redact, or filter the text	Guardrail policy at runtime	A question that asks only for proof of what happened
Who called, which identity, or which API	CloudTrail API record	Prompt or response text, since CloudTrail holds no bodies
Original prompt, original answer, or what the model received	Model invocation logs sent to CloudWatch Logs or S3	A caller who never reaches the model, because it does not appear in the log
Which source, which version, or which document	Glue catalog entries and chunk metadata with S3 version IDs	A crawler alone, since it finds files without a version
Approved release, intended use, or risk rating	SageMaker model card and registry approval status	A text field that says Approved, since only a status the deployment reads is a gate
Bias or drift over time against a baseline	Clarify bias drift monitoring	One generated answer, since Clarify does not check answer text for harm
Alert, page, or automatic response	CloudWatch alarm action, or an EventBridge rule for service events	A service state change, since an alarm reads metrics, not events

Etch lines

1. A runtime guardrail acts on content, while records keep evidence after the call.
2. CloudTrail records who called an API, but never the prompt body.
3. A metric counts events and cannot name a user.
4. A model card documents a release and does not block it.
5. Clarify tracks bias against a baseline range across scheduled windows.
6. Lineage connects a dataset to the endpoint through each step.

Flash questions

- Q: Which record keeps the exact request and response bodies of a model call? A: Model invocation logging, sent to CloudWatch Logs or S3.
- Q: What does a CloudTrail record hold for a Bedrock runtime call, and what is missing? A: The caller, the time, and request parameters such as the model ID. The prompt and response bodies are missing.
- Q: Why can a streamed call look doubled when you count every CloudTrail record? A: The stream-completion event is not an API call. Count only AwsApiCall events.
- Q: Which identifier names a stable source for each chunk in a knowledge base? A: The Glue catalog table identifier. The S3 version ID names the revision.
- Q: Which identifier is absent for files stored before versioning was enabled? A: The version ID, since older objects carry the null value.
- Q: Which SageMaker record documents the risk rating and intended use of a model? A: A model card. It documents a release but does not stop one.
- Q: Which namespace holds guardrail metrics, and which metric counts interventions? A: AWS/Bedrock/Guardrails, with InvocationsIntervened as the key metric.
- Q: Does the sensitive information filter read personal data inside tool call arguments? A: No. It reads prompts and responses, not tool use fields.

Source: Skill 3.3.1 Compliance frameworks for FM deployments, Skill 3.3.2 Implement data source tracking for GenAI traceability, Skill 3.3.3 Create organizational governance systems, Skill 3.3.4 Continuous monitoring and advanced governance controls, and The deciding constraint. AWS docs and the study guide sections above, no practice-test text.