
Memory sheet: Task 4.3 Implement monitoring systems for GenAI applications

Domain 4, weight 12 percent. Read this sheet, then answer the flash questions aloud.

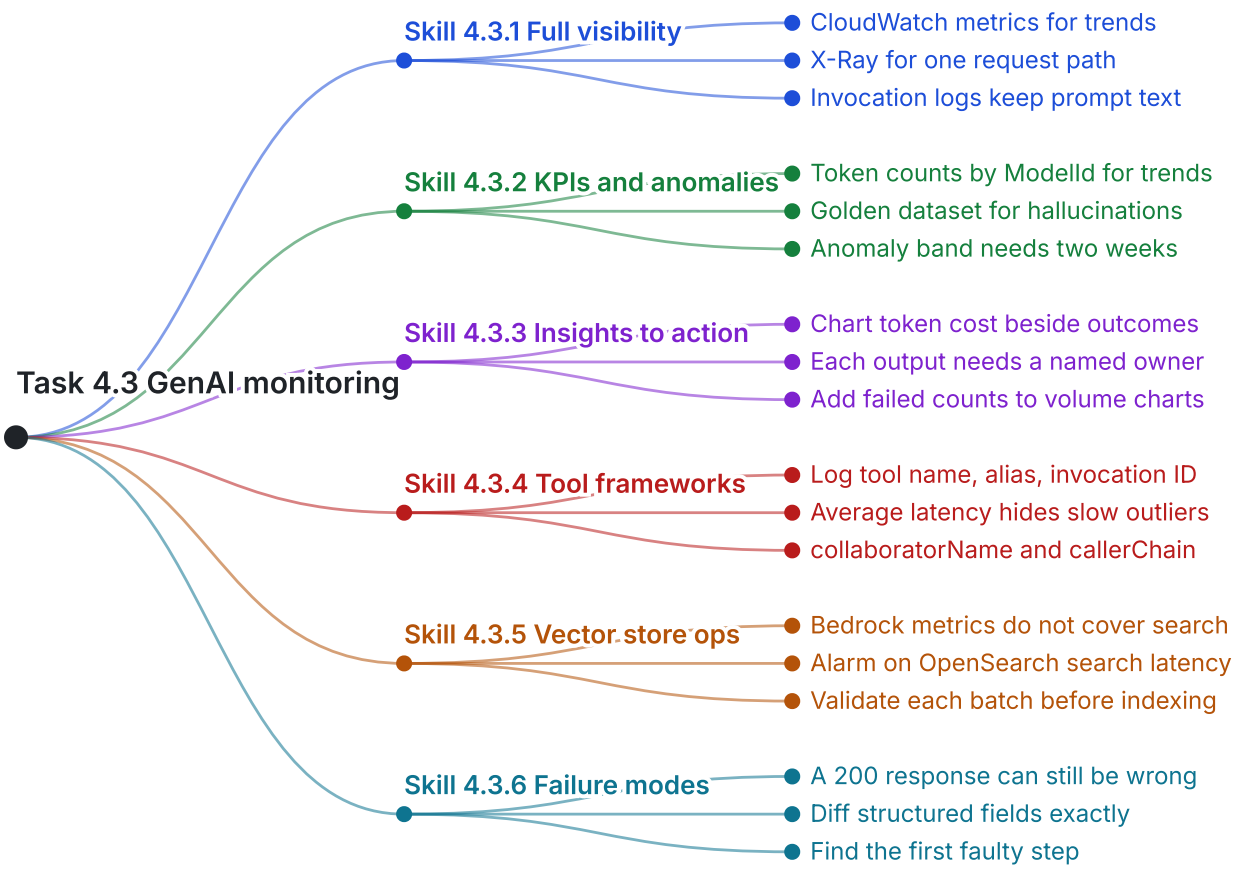

Deciding rules

When the stem says	Think of	Not when
Trend, spike, p50, or a threshold	CloudWatch metrics and alarms	The question asks about one request path
One slow request, or where the time went	X-Ray trace	The question needs the prompt or response text
Exact prompt, response text, or model input	Model invocation logs, kept in the configuration account and Region	The call is an InvokeAgent call, which invocation logging does not cover
Who called, which role, or when a call was made	CloudTrail	The question needs the text sent to a model
Blocked connection, subnet, or security group	VPC Flow Logs	The question needs prompt content or token counts
A bill jump or unexpected spend	Cost Anomaly Detection	A runtime control must act within minutes
Hallucination rate or answer correctness	Golden dataset with source context	Invocation logs alone, which show text but not truth
An agent used the wrong tool or collaborator	Agent trace with collaboratorName and callerChain	Model invocation counts, which do not count tool calls

Etch lines

1. Pick the signal from the question, then the service that stores it.
2. Metrics count over time, traces follow one request, logs keep content.
3. Invocation logging does not cover InvokeAgent calls. Use agent traces and CloudTrail data events.
4. Invocation logging and data events are off by default.
5. Query server errors and throttles without the ModelId dimension.
6. Cost Anomaly Detection cannot stop a token burst in the next few minutes.

Flash questions

- Q: Which signal gives per-model throttle counts over time? A: CloudWatch runtime metrics, with InvocationThrottles grouped by ModelId.
- Q: One slow request crosses an API, a function, and a model call. Which tool shows where the time went? A: X-Ray, which groups the segments of that request into one trace.
- Q: Where do you keep the exact prompt and response text of a Converse call? A: Model invocation logs, kept in the configuration account and Region.
- Q: Does invocation logging record InvokeAgent calls? A: No. Use agent traces and CloudTrail data events for agent calls.
- Q: Which record shows that a connection from a private subnet was rejected? A: VPC Flow Logs, with an action field of ACCEPT or REJECT.
- Q: A model gives wrong answers, yet error graphs stay flat. Why? A: Wrong answers can still return success. A golden dataset reveals them.

- Q: A brand-new model has no history for its token alarms. What threshold do you start with? A: A static threshold, then anomaly detection after two weeks of history.
- Q: Which two trace fields name the collaborator that handled a step? A: collaboratorName, and callerChain for the chain of agents.

Source: Skill sections 4.3.1 to 4.3.6, Signals at a glance, Read a long question, X versus Y, and Drill. AWS docs and the study guide sections above, no practice-test text.