CHAPTER D6

Stakeholder communication and lifecycle management


WEIGHT 14%. INFERENCE FROM SECONDARY SOURCES.

Turn words into metrics, record decisions, pass the gates.

5 sections, 13 components, 15 recall cues.

CONCEPT MAP

Units branch to components. On a small screen, scroll sideways.

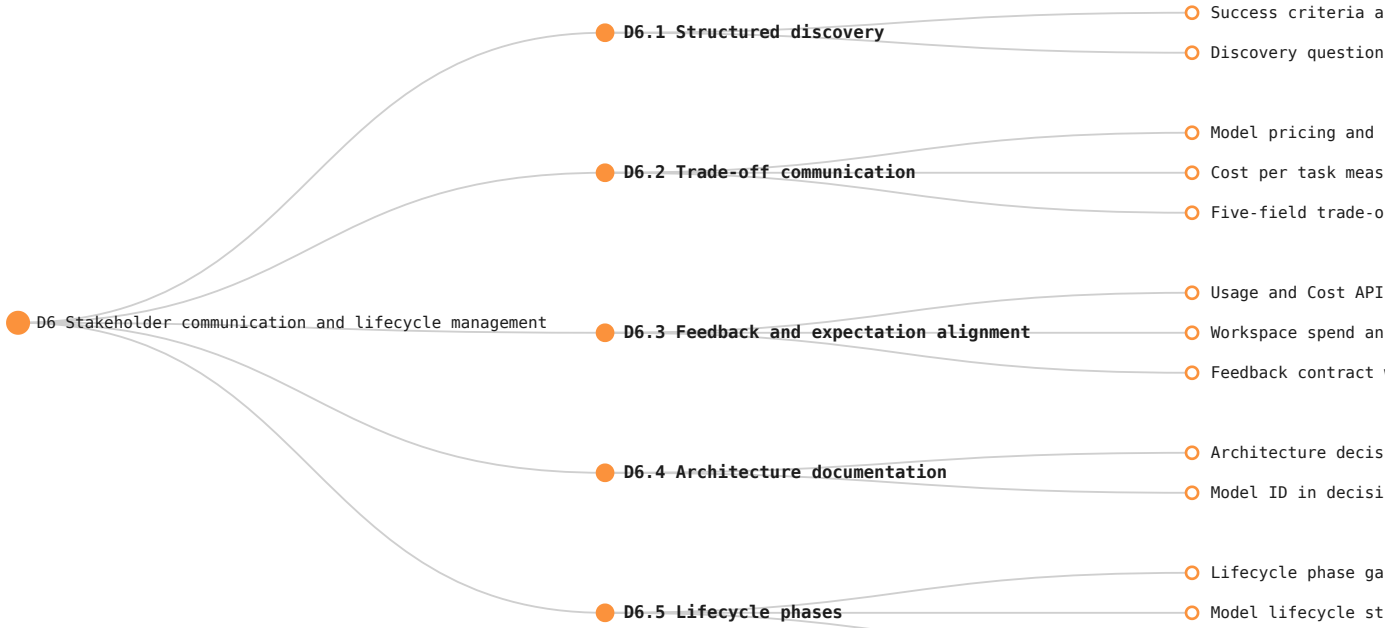


SECTIONS

D6.1 CHAPTER D6, STAKEHOLDER COMMUNICATION AND LIFECYCLE MANAGEMENT

Structured discovery

Each adjective becomes a metric, a threshold, and an owner.

CONSTRAINT FAMILIES

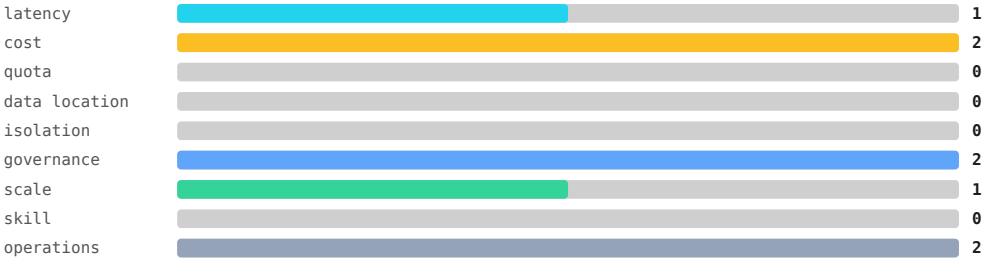

SUCCESS CRITERIA AND EVALUATION SETS

A requirement becomes testable only when it has a metric, a threshold, and a named scope.

Rule Convert each adjective into a metric, a threshold, and an owner before design.

Trap Design built on adjectives such as fast looks efficient, but no one can test it, so the team builds to a guessed bar. (Inference)

Exam tip If the stem gives adjectives but no metric, the first action is discovery.

DISCOVERY QUESTION GRID

Each question covers one dimension where a silent assumption can hide. (Inference)

Rule Ask one question for each dimension, and do not design around a blank answer. (Inference)

Trap Feature work first looks productive, but an unanswered limit still breaks the first production demo. (Inference)

Exam tip A blank answer is an open risk, so name the owner who fills it.


▼ RECALL CUES (3)

1. **a request with adjectives but no metric or threshold**
   Answer discovery before design
   Rule Convert each adjective into a metric, a threshold, and an owner.
   - Build a prototype and tune the wording later
   - Pick the largest model first
2. **a requirement that names no prohibited behavior**
   Answer written prohibition in the requirement record
   Rule Write each prohibited behavior as a design constraint with a named owner.
   - Rely on a reviewer to catch it later
   - Add monitoring after launch
3. **an owner who is unknown or who changed roles**
   Answer named owner who signs the requirement
   Rule Assign one owner who signs each requirement before design.
   - Leave the sign-off with the whole team

Trade-off communication

Compare cost per completed task. Date every price.

CONSTRAINT FAMILIES

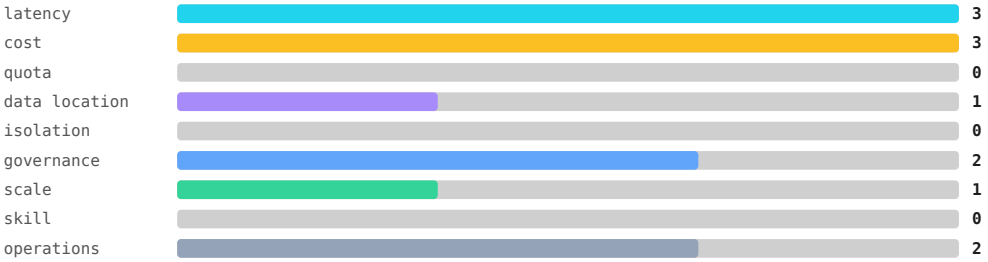

MODEL PRICING AND COST PER TASK

Compare options on cost per completed task, because the completed task is the unit that you pay for.

Rule Compare options on cost per completed task, and write the price date beside the figure.

Trap The lowest per-token price looks cheapest, but a model that needs more tokens or rounds can cost more per completed task.

Exam tip If the stem gives only a per-token price, convert it to cost per completed task first.

COST PER TASK MEASUREMENT

Record cost per task beside each quality score, so a trade-off shows both values together.

Rule Plot the score against the cost per completed task before you choose a model.

Trap A switch on the lowest per-token price looks like a saving. With no quality score on the same tasks, the cheaper tier can miss the bar or cost more per task.

Exam tip If the stem gives a cost but no quality score, measure the score first.

FIVE-FIELD TRADE-OFF RECORD

Each option needs the same fields, so every audience reads the same facts. (Inference)

Rule Give each audience the fields it decides on, and state the uncertainty beside each one. (Inference)

Trap One slide for all audiences looks efficient, but each audience then lacks the field it decides on. (Inference)

Exam tip An option that claims perfect accuracy or zero risk has no measurement behind it.

▼ RECALL CUES (3)

1. **a vendor claim of perfect accuracy or zero risk**
   Answer measured figure with its uncertainty
   Rule Replace each absolute claim with a measured figure and its uncertainty.
   - Promise zero risk to win approval
   - Quote one accuracy figure without its evaluation set
2. **options that differ in price and quality for several audiences**
   Answer priced trade-off for each audience
   Rule Price each option per completed task, then write one message per audience.
   - One slide for all audiences
   - Compare per-token prices only
3. **a cheaper model proposed for a quality-sensitive task**
   Answer measured score against spend
   Rule Measure quality and cost per task on real traffic before a switch.
   - Switch on the lowest per-token price
   - Accept the cheaper tier without a test

▼ NUMBERS AND VERSIONS (8)


- Five-minute cache writes cost 1.25 times the base input price, and one-hour cache writes cost 2 times. source
- Claude Haiku 5.5 has one price for prompts up to 100,000 tokens and another price for longer prompts. source
- Claude Opus 5.5 lists a base input price of 4 USD per million tokens and an output price of 20 USD per million tokens. source
- Regional endpoints on Amazon Bedrock carry a 10 percent pricing premium over global endpoints. source
- US-only inference through the inference_geo parameter adds a 1.1 times multiplier on all token prices for Claude 4.6 and later models. source
- For most agent workloads, the docs suggest Claude Opus 5.5 at its default effort as the first model. source
- Usage and cost data typically appears within 5 minutes of request completion. source
- Regional endpoints on Amazon Bedrock carry a 10 percent pricing premium over global endpoints. source

D6.3 CHAPTER D6, STAKEHOLDER COMMUNICATION AND LIFECYCLE MANAGEMENT

Feedback and expectation alignment

Read usage and cost on a schedule. Compare with thresholds.

CONSTRAINT FAMILIES

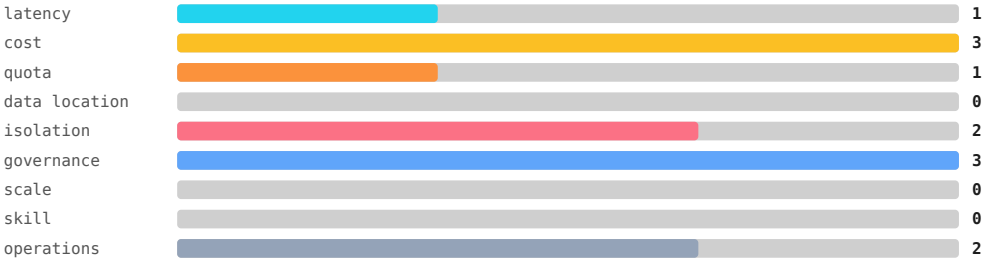

USAGE AND COST API READS

Usage data arrives after a short delay, so the feedback loop reads aggregates on a schedule.

Rule Read usage and cost aggregates on a schedule, and compare each total with its threshold.

Trap One response at a time looks precise, but it does not show the trend across workspaces. (Inference)

Exam tip Per-response usage fields show one call. The Usage and Cost API shows totals.

WORKSPACE SPEND AND RATE LIMITS

Spend limits cap monthly spend for one workspace, and rate limits cap requests and tokens per minute.

Rule Give each team or environment its own workspace, with its own spend and rate limits.

Trap One shared key with one global cap looks simpler, but it hides which team spent the budget. (Inference)

Exam tip A budget for each team points to workspace spend limits, not to a shared key.

FEEDBACK CONTRACT WITH REVIEW TRIGGERS

A written trigger turns a metric drift into a scheduled review. (Inference)

Rule Write each trigger, its owner, and its consequence before launch. (Inference)

Trap A higher SLA target looks like a fix, but the system behavior does not change. (Inference)

Exam tip A drop below the agreed iterate threshold calls for tuning, not a rebuild. (Inference)

▼ RECALL CUES (3)

1. **a spend overrun found in a monthly report**
   Answer workspace limits and alerts
   Rule Set a spend limit and alerts on the workspace that owns the spend.
   - Lower the model tier without a measurement
   - Use one shared key with no owner
2. **a quality drop below an agreed range**
   Answer review trigger and iterate rule
   Rule Run the agreed review and tune before any rebuild.
   - Rebuild on the first drop
   - Tighten the target to hide the drop
3. **a stakeholder demands a perfect guarantee**
   Answer measured range with a named trigger
   Rule Replace the guarantee with a measured range, a trigger, and a consequence.
   - Promise perfect uptime
   - Promise a single point with no range

▼ NUMBERS AND VERSIONS (6)


- Usage and cost data typically appears within 5 minutes of request completion. source
- Usage API time buckets are 1 minute, 1 hour, or 1 day. source
- Requests that exceed a rate limit return a 429 error. source
- An organization can have up to 100 workspaces by default, and archived workspaces do not count. source
- The default Amazon Bedrock quota is 2 million input tokens per minute. source
- Usage and cost data typically appears within 5 minutes of request completion. source

D6.4 CHAPTER D6, STAKEHOLDER COMMUNICATION AND LIFECYCLE MANAGEMENT

Architecture documentation

Record each decision with alternatives, owner, and evidence.

CONSTRAINT FAMILIES

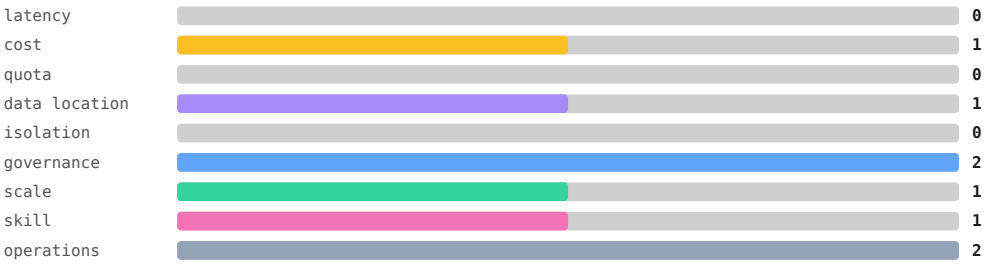

ARCHITECTURE DECISION RECORD

A record that a successor can read preserves the decision after the original people leave. (Inference)

Rule Record each decision with its alternatives, owner, evidence, and review criteria when you make it. (Inference)

Trap A full new evaluation looks thorough, but it repeats evidence that the record already holds. (Inference)

Exam tip If the decision owner left, the first action reads the record. (Inference)

MODEL ID IN DECISION RECORDS

Record the exact model ID, because a dateless ID from the 4.6 generation names one fixed snapshot.

Rule Record the exact model ID, the platform, and the deprecation date for each measured decision.

Trap A dateless ID looks like an alias that moves, but it names a fixed snapshot. A record that says latest misstates what was tested.

Exam tip A model ID with no date is a fixed snapshot from the 4.6 generation onward.

▼ RECALL CUES (3)

1. **a successor must run a system whose owner left**
   Answer read the record and check review criteria
   Rule Read the decision record, check its criteria against current data, then change the system.
   - Re-run the full evaluation from scratch
   - Remove the component because the owner left
2. **a team cannot say which model a decision measured**
   Answer exact model ID in the record
   Rule Record the exact model ID and platform for each measured decision.
   - Record the model family only
   - Record latest as the model
3. **a decision record is wrong after a code change**
   Answer new record that supersedes the old one
   Rule Add a new record that supersedes the old one. Do not edit it in place.
   - Edit the old record without a trace

▼ NUMBERS AND VERSIONS (3)


- A dateless model ID from the 4.6 generation is a fixed snapshot, not an alias. source
- Models before the 4.6 generation include a snapshot date in the ID. source
- Anthropic gives at least 60 days of notice before retirement of a publicly released model. source

D6.5 CHAPTER D6, STAKEHOLDER COMMUNICATION AND LIFECYCLE MANAGEMENT

Lifecycle phases

A phase fails: return to the earliest skipped gate.

CONSTRAINT FAMILIES

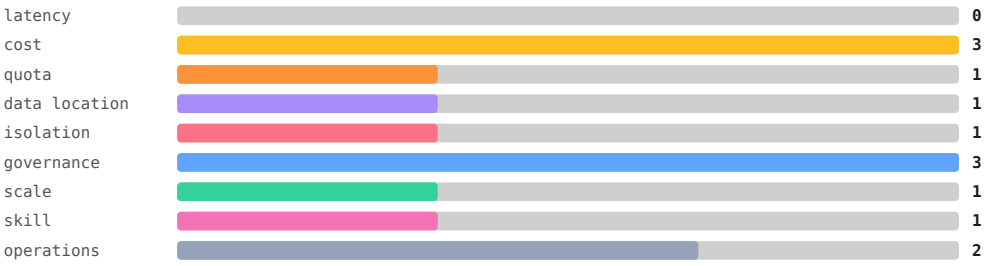

LIFECYCLE PHASE GATES

Each phase closes only when its artifact exists, so later work cannot replace earlier work. (Inference)

Rule When a later phase fails, return to the earliest skipped gate. (Inference)

Trap More dashboards look like progress, but they measure a design that has no requirements. (Inference)

Exam tip A higher error rate with no thresholds points to discovery, not to monitoring tools. (Inference)

MODEL LIFECYCLE STATES AND RETIREMENT

A model has one of four states, active, legacy, deprecated, or retired, and requests to a retired model fail.

Rule Migrate to the named replacement before the retirement date, and test the replacement first.

Trap A model switch made only at the retirement date causes an outage, because requests to a retired model fail.

Exam tip A deprecated model still serves requests, but its retirement date sets the deadline.

WORKSPACES PER ENVIRONMENT

Every request runs in exactly one workspace, so each environment needs its own workspace for keys, usage, and limits.

Rule Create one workspace for each environment that needs its own limits or reports.

Trap One shared workspace with a label convention looks simple, but keys and limits then mix across environments. (Inference)

Exam tip The Default Workspace cannot have spend limits, so production needs its own workspace.

▼ RECALL CUES (3)

1. **an error rate rises in production with no requirement thresholds**
   Answer return to the skipped phase
   Rule Return to the earliest phase whose gate the team skipped.
   - Add dashboards to the live system
   - Add a reviewer to every task
2. **a deprecation notice names a retirement date**
   Answer migrate to the named replacement before the date
   Rule Test the replacement, then move traffic before the retirement date.
   - Wait for the date to force a change
   - Keep the retired model on a backup route
3. **a team mixes development and production traffic in one workspace**
   Answer separate workspace for each environment
   Rule Create one workspace for each environment with its own limits.
   - One shared key for all environments

▼ NUMBERS AND VERSIONS (5)

- API version 2026-10-21 removes the temperature, top_p, and top_k request parameters. source
- A request that sends a removed parameter returns a 400 error on every model. source
- Anthropic gives at least 60 days of notice before retirement of a publicly released model. source
- Anthropic gives at least 60 days of notice before retirement of a publicly released model. source
- An organization can have up to 100 workspaces by default. source