EXAM MAP

Claude Certified Architect, Professional. Memory sheet

Seven chapters, 42 sections, and ten rules that cut across them.


42 sections, 110 components, 122 recall cues, 273 numbers and versions.

TEN RULES

1	Enforce controls in code. Prompts guide the model.
2	Pick the lowest tier that clears the measured quality floor.
3	Count tokens with the model you will call.
4	Price each option per completed task, and date the price.
5	Scope the tools before you add monitoring.
6	Cache the stable prefix. Move variables after the breakpoint.
7	Batch the work that no user waits for.
8	Trace every model and tool hop with one trace ID.
9	Approve irreversible actions first. Review reversible actions after.
10	Confirm feature coverage before regulated data reaches the API.

MAP


Inner ring: chapters. Outer ring: sections. Select a section to open its card.

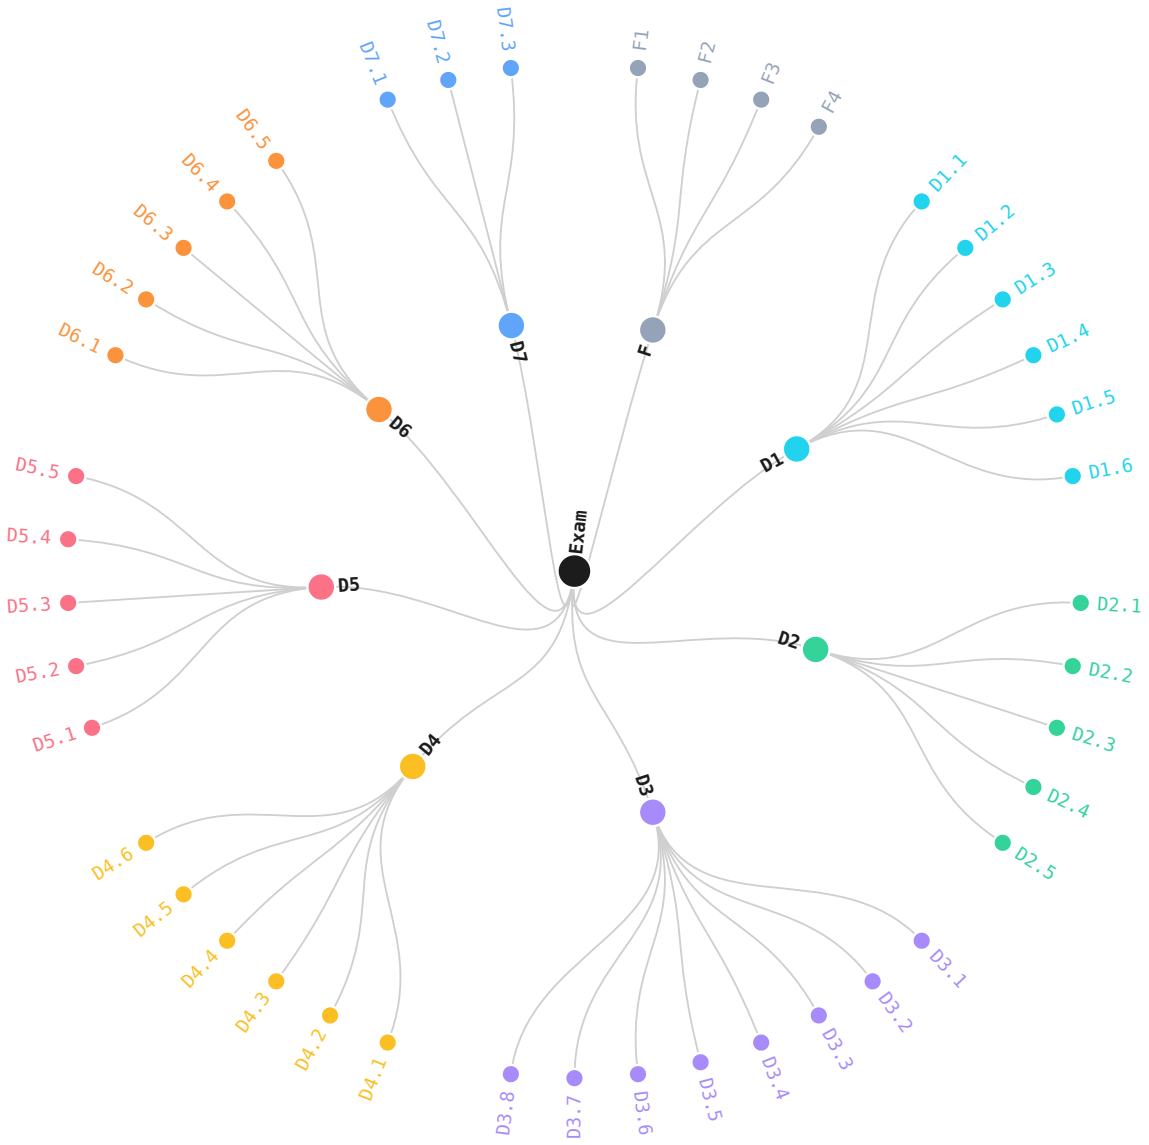

CHAPTERS

- F Foundations
- D1 Solution design and architecture
- D2 Claude models, prompting, and context engineering
- D3 Integration
- D4 Evaluation, testing, and optimization
- D5 Governance, safety, and risk management
- D6 Stakeholder communication and lifecycle management
- D7 Developer productivity and operational enablement

CONSTRAINT FAMILIES ACROSS ALL SECTIONS

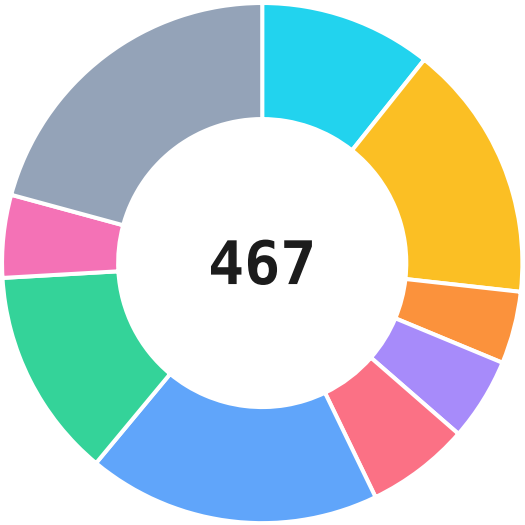

- latency, 50
- cost, 75
- quota, 21
- data location, 24
- isolation, 30
- governance, 85
- scale, 61
- skill, 24
- operations, 97

SECTIONS

SECTION	TITLE	MEMORY HOOK
F1	Architecture and business foundations	Rate per token class, sum the classes, then times volume.
F2	LLM foundations	Fit the window first. Then choose what enters it.
F3	Software and distributed systems	Retry 429 and 5xx with backoff. Fix 400 and 401 first.
F4	Security and identity	Scoped, time-limited, identity-backed key. Never in the prompt.

SECTION	TITLE	MEMORY HOOK
D1.1	Business problem to Claude solution	Fixed mapping: code. Open input: Claude plus a code check.
D1.2	End-to-end architecture	The application owns history, retries, and stop reasons.
D1.3	Architectural pattern selection	Known steps: tool-use loop. Open steps: agent loop.
D1.4	Multi-agent orchestration	Independent scoped work only. One lead owns the merge.
D1.5	Task decomposition	Split at independent seams. Check the merge in code.
D1.6	Business-value alignment	Unit cost from published rates, times expected volume.
D2.1	Model selection and tier trade-offs	Lowest tier that clears the measured floor. Then tune effort.
D2.2	System prompts, templates, and guardrails	Role and output rules in the prompt. Access rules in code.
D2.3	Prompt techniques	Three to five diverse examples. Measure before adding more.
D2.4	Context and token management	Count with the model you call. Budget before you send.
D2.5	Reuse and prompt caching	Breakpoint on the last block shared by every cached request.
D3.1	Tool capability scope	Remove the tools the task does not need. Then monitor.
D3.2	Authentication and authorization in integrations	Per-user credential when the audit must name the person.
D3.3	Accuracy and latency trade-offs	Smallest model and effort that pass quality and latency.
D3.4	Observability at scale	Trace every model and tool hop with one trace ID.
D3.5	The RAG pipeline	Search result blocks when answers need checkable sources.

SECTION	TITLE	MEMORY HOOK
D3.6	Retrieval strategies	Keywords for exact terms. Semantic for paraphrase. Filters for access.
D3.7	Integration mechanisms	Messages API and remote MCP: connector, tool calls only.
D3.8	Progressive discovery and monolithic context	Ten or more tools, or over 10k tokens: defer the definitions.
D4.1	Evaluation metrics	Business outcome is primary. Proxy scores are diagnostics.
D4.2	Evaluation datasets and frameworks	Build from production traffic. Add production edge cases.
D4.3	A/B tests and iteration	One arm per unit. Compare on the primary metric and threshold.
D4.4	Diagnosis at the correct layer	Earliest changed block in the prefix. Move variables after it.
D4.5	Optimization under quality floors	Work that nobody waits for: batch. User waits: synchronous.
D4.6	Production monitoring	Show spend beside completed tasks. Alert on cost per task.
D5.1	Guardrails and safety controls	Screen untrusted text. Enforce authorization in code.
D5.2	Risks and failure modes	Every claim needs a source quote, or it goes.
D5.3	Human-in-the-loop validation	Irreversible action: approve before. Reversible: review after.
D5.4	Regulatory compliance and data controls	ZDR per organization. Check feature coverage before regulated data.
D5.5	Responsible AI	Policy and examples in the prompt. A schema constrains the verdict.
D6.1	Structured discovery	Each adjective becomes a metric, a threshold, and an owner.
D6.2	Trade-off communication	Compare cost per completed task. Date every price.

SECTION	TITLE	MEMORY HOOK
D6.3	Feedback and expectation alignment	Read usage and cost on a schedule. Compare with thresholds.
D6.4	Architecture documentation	Record each decision with alternatives, owner, and evidence.
D6.5	Lifecycle phases	A phase fails: return to the earliest skipped gate.
D7.1	Team configuration for Claude Code	Control: permission rule or hook. Convention: CLAUDE.md.
D7.2	AI-assisted workflows with Claude Code	--tools restricts. --allowedTools only auto-approves.
D7.3	Diagnosis and operational resolution	Run the built-in check for the symptom first.

NUMBERS AND VERSIONS

SECTION	FACT	SOURCE
F1	Claude Sonnet 5.5 costs 2 dollars per million input tokens and 10 dollars per million output tokens.	source
F1	Claude Opus 5.5 costs 4 dollars per million input tokens and 20 dollars per million output tokens.	source
F1	Claude Haiku 5.5 starts at 0.10 dollars per million input tokens and 0.50 dollars per million output tokens.	source
F1	Batch API requests cost 50 percent less than the base price.	source
F1	Regional and multi-region endpoints include a 10 percent premium over global endpoints.	source
F1	Setting inference_geo to us on Claude 4.6 and later models applies a 1.1 times pricing multiplier.	source
F1	Prompts over 100,000 tokens cost more on Claude Haiku 5.5.	source
F1	The Start tier monthly spend cap is 500 US dollars.	source
F1	The Build tier monthly spend cap is 1,000 US dollars.	source
F1	The Scale tier monthly spend cap is 200,000 US dollars.	source
F1	A tier spend cap returns HTTP 429 with no retry-after header.	source

SECTION	FACT	SOURCE
F1	A spend limit that you set returns HTTP 400 with an invalid_request_error type.	source
F1	An organization has up to 100 workspaces by default.	source
F1	On Claude Platform on AWS, spend can take about 2 hours to reflect recent usage, and the overshoot is billed.	source
F1	Even with temperature set to 0, identical inputs can produce different outputs across API calls.	source
F2	Claude Opus 5.5 has a 1M-token context window.	source
F2	Models with a 1M-token context window generate up to 128k output tokens in one request.	source
F2	Other models, such as Claude Sonnet 4.5, have a 200k-token context window.	source
F2	An input that alone exceeds the window returns a 400 invalid_request_error.	source
F2	1M tokens is roughly 555k words on the current tokenizer.	source
F2	One request can include up to 600 images or PDF pages on models with a 1M-token window.	source
F2	Claude Haiku 5.5 is built for high-volume, latency-sensitive tasks such as classification and routing.	source
F2	Claude Haiku 5.5 has a 1M-token context window and up to 128K output tokens.	source
F2	Claude Haiku 5.5 uses a tokenizer that counts about 30 percent more tokens than Claude Haiku 4.5 for the same text.	source
F2	Claude Sonnet 5.5 costs 2 dollars per million input tokens and 10 dollars per million output tokens.	source
F2	Claude Sonnet 5.5 retires not sooner than September 28, 2027.	source
F3	The official SDK retries connection errors, rate limits, and 5xx errors twice by default.	source
F3	A 500 api_error means an unexpected internal error, and the docs say to retry with exponential backoff.	source
F3	A 529 overloaded_error means the API is temporarily overloaded.	source

SECTION	FACT	SOURCE
F3	The Messages API accepts a request up to 32 MB.	source
F3	A 413 request_too_large error means the request exceeds the size limit.	source
F3	The SDK validates that Messages requests that do not stream are not expected to exceed a 10-minute timeout.	source
F3	Most batches complete within 1 hour.	source
F3	Batches expire if processing does not complete within 24 hours.	source
F3	Batch results are available for 29 days after creation.	source
F3	The Messages API accepts a request up to 32 MB.	source
F3	The Batch API accepts a request up to 256 MB.	source
F3	An error can occur after the API returns a 200 response during a server-sent event stream.	source
F3	An overloaded_error in a stream would normally correspond to HTTP 529.	source
F3	Resume of an interrupted stream is documented for Claude 4.5 models and earlier.	source
F4	Key expiration is a preset of 3 hours, 1 day, 7 days, or 30 days, a custom duration, or Never.	source
F4	An expired key returns 401 authentication_error and cannot be reactivated.	source
F4	Anthropic emails the key creator 7 days before expiration for keys with a lifetime of at least 14 days.	source
F4	Admin API keys start with sk-ant-admin01-.	source
F4	Short-term bearer tokens on Amazon Bedrock have a 12-hour maximum.	source
F4	The default token lifetime in a federation rule is 3,600 seconds.	source
F4	The minted token lifetime is never less than 60 seconds.	source
F4	The SDK starts an advisory refresh at expiry minus 120 seconds.	source
F4	The SDK starts a mandatory refresh at expiry minus 30 seconds.	source
F4	The federation setup wizard listens for a token exchange for 15 minutes.	source

SECTION	FACT	SOURCE
F4	A federation rule accepts token_lifetime_seconds from 60 to 86400, with a default of 3600.	source
F4	Covered Models require 30-day data retention.	source
F4	Anthropic recommends logging activity on at least a 30-day rolling basis.	source
D1.1	Claude Haiku 5.5 base input price is 0.10 dollars per million tokens for prompts up to 100,000 tokens.	source
D1.1	Claude Haiku 5.5 output price is 0.50 dollars per million tokens for prompts up to 100,000 tokens.	source
D1.1	Claude Haiku 5.5 prompts over 100,000 tokens pay higher prices.	source
D1.1	Claude Opus 5.5 base input price is 4 dollars per million tokens.	source
D1.1	The Message Batches API discount is 50 percent on input and output tokens.	source
D1.1	A batch holds up to 100,000 Message requests or 256 MB, whichever is reached first.	source
D1.1	The docs give an example criterion of an F1 score of at least 0.85 on a held-out test set.	source
D1.1	Most batches finish in less than 1 hour.	source
D1.1	Batch results are available for 29 days after creation.	source
D1.3	On Claude Platform on AWS, a Managed Agents session runs without user events for up to 6 hours before it needs reauthentication.	source
D1.4	Delegation is one level deep, and a session can have at most 25 child threads at a time.	source
D1.4	Multiagent orchestration has beta status with the beta header managed-agents-2026-04-01.	source
D1.5	A batch holds up to 100,000 Message requests or 256 MB, whichever is reached first.	source
D1.5	Most batches finish within 1 hour.	source
D1.5	Batch results are available for 29 days after creation.	source
D1.5	Batch processing gives a 50 percent discount on input and output tokens.	source

SECTION	FACT	SOURCE
D1.5	A threshold compaction trigger must be at least 50,000 input tokens, and the default trigger is 150,000.	source
D1.6	Claude Haiku 5.5 base input price is 0.10 dollars per million tokens for prompts up to 100,000 tokens.	source
D1.6	Claude Haiku 5.5 output price is 0.50 dollars per million tokens for prompts up to 100,000 tokens.	source
D1.6	Claude Haiku 5.5 cache hits cost 0.01 dollars per million tokens.	source
D1.6	Toy: 2 million input tokens cost 0.20 dollars at the Haiku 5.5 base input price of 0.10 dollars per million. (Inference)	source
D2.1	Claude Haiku 5.5 costs $0.10 per million input tokens and $0.50 per million output tokens for prompts up to 100,000 tokens.	source
D2.1	Claude Haiku 5.5 costs $0.50 per million input tokens and $2.50 per million output tokens for prompts over 100,000 tokens.	source
D2.1	Claude Sonnet 5.5 costs $2 per million input tokens and $10 per million output tokens.	source
D2.1	Claude Opus 5.5 costs $4 per million input tokens and $20 per million output tokens.	source
D2.1	Claude Fable 5.1 costs $10 per million input tokens and $50 per million output tokens.	source
D2.1	The four current models in the comparison table have a 1M token context window and 128K max output.	source
D2.1	The model selection matrix says that most workloads start with Claude Opus 5.5.	source
D2.1	The retirement date for Claude Haiku 5.5 is not sooner than October 7, 2027.	source
D2.1	The default effort for Claude Haiku 5.5 is medium.	source
D2.1	The default effort for Claude Opus 5.5 is medium.	source
D2.1	Claude Haiku 5.5 supports the effort levels low, medium, high, xhigh, and max.	source
D2.1	On Claude Haiku 5.5, a thinking budget_tokens setting returns a 400 error.	source

SECTION	FACT	SOURCE
D2.1	Per-message effort is in beta and needs the beta header mid-conversation-output-config-2026-07-01.	source
D2.2	A lightweight model such as Claude Haiku 5.5 can pre-screen user input before the main conversation.	source
D2.2	A stop_reason refusal from the Claude Haiku 5.5 screen counts as a harmful verdict.	source
D2.2	On Claude Haiku 5.5, Claude Sonnet 5.5, and Claude Opus 5.5, a role system message in messages keeps the system and message caches.	source
D2.2	The explicit limits are 20 strict tools, 24 optional parameters, and 16 union-type parameters per request.	source
D2.2	Compiled grammars stay cached for 24 hours from last use.	source
D2.3	Include 3 to 5 examples for best results.	source
D2.3	Queries at the end of a long prompt can improve response quality by up to 30 percent in tests.	source
D2.3	Claude Haiku 5.5 uses adaptive thinking, and a budget_tokens setting returns a 400 error.	source
D2.3	On Claude Haiku 5.5, thinking can be turned off only at high effort or below.	source
D2.3	Forced tool use works with adaptive thinking. Claude Opus 5.5, Claude Sonnet 5.5, Claude Fable 5.1, and Claude Mythos 5.1 reject it with a 400 error.	source
D2.3	The default effort for Claude Haiku 5.5 is medium.	source
D2.3	Claude 4.6 and later models reject a prefilled final assistant turn with a 400 error.	source
D2.3	Claude Opus 5.5, Claude Sonnet 5.5, Claude Fable 5.1, and Claude Mythos 5.1 reject forced tool use. Use tool_choice auto with strict tool use or structured outputs.	source
D2.4	The context window for Claude Haiku 5.5 is 1M tokens.	source
D2.4	Claude Haiku 5.5 prices input at $0.50 per million tokens for prompts over 100,000 tokens.	source
D2.4	Claude Haiku 5.5 counts the same text as about 30 percent more tokens than Claude Haiku 4.5.	source

SECTION	FACT	SOURCE
D2.4	Compaction on demand uses the compact-2026-09-04 beta header.	source
D2.4	Compaction at a token threshold uses the compact-2026-01-12 beta header.	source
D2.4	Context editing is in beta and needs the context-management-2025-06-27 beta header.	source
D2.4	The clear_tool_uses_20250919 strategy clears old tool results when context grows beyond a threshold.	source
D2.4	The clear_thinking_20251015 strategy manages thinking blocks from earlier assistant turns.	source
D2.4	On Claude Haiku 5.5, server-side context management never invalidates thinking blocks.	source
D2.5	The default cache lifetime is 5 minutes.	source
D2.5	A 5-minute cache write costs 1.25 times the base input price.	source
D2.5	A 1-hour cache write costs 2 times the base input price.	source
D2.5	A cache read costs 0.1 times the base input price on Claude Haiku 5.5. It costs 0.05 times on Claude Opus 5.5 and Claude Sonnet 5.5, and 0.025 times on Claude Fable 5.1.	source
D2.5	A request can define up to 4 cache breakpoints.	source
D2.5	The lookback window checks at most 20 block positions per breakpoint.	source
D2.5	The minimum cacheable prompt length is 512 tokens for Claude Fable 5.1, Claude Opus 5.5, Claude Sonnet 5.5, and Claude Haiku 5.5.	source
D2.5	At 0.1 times the read price, the cache pays off after one read for a 5-minute write and after two reads for a 1-hour write.	source
D2.5	Automatic caching uses a 5-minute TTL by default.	source
D2.5	A ttl value of 1h sets a 1-hour TTL at 2 times the base input price.	source
D2.5	Automatic caching uses one of the 4 available breakpoint slots.	source
D2.5	In a request with mixed TTLs, 1-hour cache entries must appear before 5-minute cache entries.	source
D2.5	Automatic caching is available on every platform except the legacy Amazon Bedrock integration for Claude Opus 4.6 and earlier.	source

SECTION	FACT	SOURCE
D2.5	An explicit cache_control on the last block with a different TTL makes automatic caching return a 400 error.	source
D2.5	A cache hit requires 100 percent identical prompt segments up to the cache_control block.	source
D2.5	Include 3 to 5 examples in examples tags for best results.	source
D2.5	Queries placed at the end of a long prompt can improve response quality by up to 30 percent in tests.	source
D2.5	Put long-form data near the top of the prompt for inputs of 20k or more tokens.	source
D3.1	A typical multiserver setup can consume about 55k tokens in tool definitions.	source
D3.1	Tool search typically reduces definition tokens by over 85 percent.	source
D3.1	Claude tool selection accuracy can degrade once the set exceeds about 30 to 50 tools.	source
D3.1	Tool search is advisable with 10 or more tools.	source
D3.1	Each search returns up to 5 found tools by default.	source
D3.1	A request can define up to 10,000 tools with defer_loading set to true.	source
D3.1	Regex patterns are limited to 200 characters, and BM25 queries to 500 characters.	source
D3.1	Standard tool use fits when a request has fewer than 10 tools.	source
D3.1	A deferred tool cannot carry cache_control, and the API returns a 400 error.	source
D3.1	Tool descriptions should run at least 3 to 4 sentences for each tool.	source
D3.1	Tool examples add about 20 to 50 tokens for simple examples.	source
D3.1	A request can set strict on at most 20 tools.	source
D3.2	Claude Code flags a remote server for sign-in on a 401 or 403 response.	source
D3.2	An organization can hold up to 100 workspaces by default.	source
D3.2	Bedrock bearer tokens have a 12-hour maximum and are the least preferred option.	source

SECTION	FACT	SOURCE
D3.2	The default Bedrock quota is 2 million input tokens per minute.	source
D3.3	Claude Haiku 5.5 defaults to medium effort.	source
D3.3	Fast mode delivers up to 2.5 times higher output tokens per second.	source
D3.3	Fast mode on Claude Opus 5.5 costs $8 per MTok input and $40 per MTok output.	source
D3.3	After a 504 timeout error, the docs suggest the streaming Messages API for long requests.	source
D3.3	The SDK validates that Messages requests without streaming are not expected to exceed a 10-minute timeout.	source
D3.3	Batch usage is charged at 50 percent of standard API prices.	source
D3.3	A batch holds up to 100,000 requests or 256 MB, whichever is reached first.	source
D3.3	Most batches finish within 1 hour.	source
D3.3	Batch results are available for 29 days after creation.	source
D3.3	A batch expires if processing does not complete within 24 hours.	source
D3.4	Each span holds up to 0.75 MB of content by default.	source
D3.4	The usage report default is 7 buckets for one-day width, and the maximum is 31.	source
D3.4	A spend-cap 429 response has no retry-after header.	source
D3.4	The default metric export interval is 60000 milliseconds.	source
D3.4	The default logs export interval is 5000 milliseconds.	source
D3.5	All active models support search results with citations, except Claude Haiku 3.	source
D3.5	Citations combined with structured outputs return a 400 error.	source
D3.5	voyage-4 has a context length of 32,000 tokens and a default dimension of 1024.	source
D3.5	voyage-context-4 accepts up to 120,000 tokens when enable_auto_chunking is true.	source
D3.5	Voyage AI embeddings are normalized to length 1.	source

SECTION	FACT	SOURCE
D3.5	rerank-3 has a context length of 32,000 tokens and is recommended for most applications.	source
D3.5	Int8 quantization reduces embedding storage by 4x compared with float.	source
D3.5	Plain text citations use 0-indexed character indices with exclusive end indices.	source
D3.6	Voyage AI embeddings are normalized to length 1.	source
D3.6	Int8 embeddings cut storage by 4x compared with float.	source
D3.6	Binary quantization cuts embedding storage by 32x compared with float.	source
D3.6	rerank-3 has a context length of 32,000 tokens.	source
D3.6	rerank-3-lite is optimized for latency and cost.	source
D3.6	rerank-3 is the highest accuracy model in the listed rerankers.	source
D3.6	The MCP connector uses the mcp-client-2025-11-20 beta header.	source
D3.7	The MCP connector uses the mcp-client-2025-11-20 beta header.	source
D3.7	Batch processing gives a 50 percent discount on all usage.	source
D3.7	A Message Batch holds up to 100,000 requests or 256 MB, whichever limit comes first.	source
D3.7	From v2.1.265, Claude Code tries the HTTP transport first and switches to SSE when the server does not accept it.	source
D3.7	The idle timeout defaults to five minutes for HTTP and SSE servers, and to 30 minutes for stdio servers.	source
D3.8	Tool search returns up to 5 tools that match the query by default.	source
D3.8	A request allows up to 10,000 tools with defer_loading true.	source
D3.8	Regex patterns are limited to 200 characters, and BM25 queries to 500 characters.	source
D3.8	The docs say tool selection accuracy degrades once you exceed 30 to 50 available tools.	source
D3.8	The docs say tool search typically reduces tool definition tokens by over 85 percent.	source

SECTION	FACT	SOURCE
D3.8	The context window holds up to 1M tokens for several models, such as Claude Haiku 5.5.	source
D3.8	The auto mode activates tool search when definitions reach 10 percent of the context window.	source
D3.8	With alwaysLoad true, startup waits for the server tools, capped at the standard 5-second connect timeout.	source
D3.8	Level 1 metadata costs about 100 tokens per skill.	source
D3.8	Level 2 instructions cost under 5k tokens when a skill triggers.	source
D3.8	The SKILL.md body should stay under 500 lines.	source
D3.8	A skill name has a maximum of 64 characters.	source
D3.8	A skill description has a maximum of 1,024 characters.	source
D4.1	The docs example sets an F1 score of at least 0.85 on a held-out test set of 10,000 posts.	source
D4.1	The Usage API supports 1m, 1h, and 1d time buckets.	source
D4.1	The default limit for 1m buckets is 60, and the maximum is 1,440 buckets.	source
D4.1	Usage and cost data typically appears within 5 minutes of request completion.	source
D4.3	In Anthropic tests, low effort with failures re-run at high cost about 40% less than all tasks at high, at the same pass rate.	source
D4.3	Claude Opus 5.5 and Claude Haiku 5.5 default to medium effort. Other models that support effort default to high.	source
D4.4	The docs say to ask for word-for-word quotes first on documents longer than 20k tokens.	source
D4.5	The Batch API takes 50 percent off every token of a request, cached tokens too.	source
D4.5	A batch holds up to 100,000 Message requests or 256 MB, whichever limit comes first.	source
D4.5	Most batches complete within 1 hour.	source
D4.5	Results become available after all messages complete or after 24 hours, whichever comes first.	source

SECTION	FACT	SOURCE
D4.5	Batch results are available for 29 days after creation.	source
D4.5	A batched request must set max_tokens to at least 1.	source
D4.5	The docs say Claude Haiku 5.5 offers the fastest response times with high intelligence.	source
D4.5	The docs call effort the main control for speed and cost on Claude Haiku 5.5.	source
D4.5	The docs say to start most agent workloads with Claude Opus 5.5 at default effort medium.	source
D4.6	The Usage API supports 1m, 1h, and 1d time buckets.	source
D4.6	The default limit for 1h buckets is 24, and the maximum is 168 buckets.	source
D4.6	Usage and cost data typically appears within 5 minutes of request completion.	source
D4.6	With Full content, each span holds up to 0.75 MB of content by default.	source
D4.6	HIPAA, FERPA, or K-12 restrictions make destinations export only metadata.	source
D4.6	Claude Code exports metrics every 60000 ms by default.	source
D4.6	For the 4.6 generation and later, the dateless model ID maps to a single fixed snapshot.	source
D5.1	Claude Haiku 5.5 runs safety classifiers that can decline the screen request itself.	source
D5.1	A PreToolUse hook that exits with code 2 blocks the tool call.	source
D5.1	The sandbox runs on macOS, Linux, and WSL2.	source
D5.2	For long documents above 20k tokens, ask Claude for word-for-word quotes before the task.	source
D5.2	The Amazon Bedrock default quota is 2 million input tokens per minute.	source
D5.2	Customers can request up to 5 million input tokens per minute without additional Anthropic approval on Amazon Bedrock.	source
D5.2	When usage reaches a workspace spend limit, requests return HTTP 400 with invalid_request_error until the next month or a change to the limit.	source
D5.2	On Claude Platform on AWS, spend can take about 2 hours to reflect recent usage, and the overshoot is billed.	source

SECTION	FACT	SOURCE
D5.2	Anthropic gives at least 60 days notice before retirement for publicly released models.	source
D5.2	A dateless model ID from the 4.6 generation is a fixed snapshot.	source
D5.3	Anthropic recommends a rolling retention of at least 30 days for Amazon Bedrock activity logs.	source
D5.3	A PreToolUse hook that exits with code 2 prevents the tool call.	source
D5.3	A permissionDecision of allow does not let an action through after an exit code 2 block.	source
D5.3	Exit code 0 with no JSON decision means the normal permission flow applies.	source
D5.3	The default timeout for a command hook is 600 seconds.	source
D5.4	Covered Models require 30-day data retention and are not available under ZDR unless Anthropic authorizes them.	source
D5.4	US-only inference is priced at 1.1 times the standard rate across all token categories.	source
D5.4	The inference_geo parameter returns a 400 error on Claude models before the 4.6 generation.	source
D5.4	The Activity Feed retains events for 6 years.	source
D5.4	Activities are queryable within 1 minute of their creation.	source
D5.5	The moderation guide names Claude Haiku 5.5 as a cost-effective choice for large volumes.	source
D5.5	Claude Fable 5.1, Claude Fable 5, Claude Opus 5.5, Claude Opus 5, Claude Sonnet 5.5, and Claude Haiku 5.5 include these classifiers.	source
D5.5	Claude Haiku 5.5 has neither server-side fallback nor fallback credit, so use the SDK middleware or a manual retry.	source
D5.5	The resources page links system cards for Claude Haiku 5.5, Claude Sonnet 5.5, and Claude Opus 5.5.	source
D6.2	Five-minute cache writes cost 1.25 times the base input price, and one-hour cache writes cost 2 times.	source
D6.2	Claude Haiku 5.5 has one price for prompts up to 100,000 tokens and another price for longer prompts.	source

SECTION	FACT	SOURCE
D6.2	Claude Opus 5.5 lists a base input price of 4 USD per million tokens and an output price of 20 USD per million tokens.	source
D6.2	Regional endpoints on Amazon Bedrock carry a 10 percent pricing premium over global endpoints.	source
D6.2	US-only inference through the inference_geo parameter adds a 1.1 times multiplier on all token prices for Claude 4.6 and later models.	source
D6.2	For most agent workloads, the docs suggest Claude Opus 5.5 at its default effort as the first model.	source
D6.2	Usage and cost data typically appears within 5 minutes of request completion.	source
D6.2	Regional endpoints on Amazon Bedrock carry a 10 percent pricing premium over global endpoints.	source
D6.3	Usage and cost data typically appears within 5 minutes of request completion.	source
D6.3	Usage API time buckets are 1 minute, 1 hour, or 1 day.	source
D6.3	Requests that exceed a rate limit return a 429 error.	source
D6.3	An organization can have up to 100 workspaces by default, and archived workspaces do not count.	source
D6.3	The default Amazon Bedrock quota is 2 million input tokens per minute.	source
D6.3	Usage and cost data typically appears within 5 minutes of request completion.	source
D6.4	A dateless model ID from the 4.6 generation is a fixed snapshot, not an alias.	source
D6.4	Models before the 4.6 generation include a snapshot date in the ID.	source
D6.4	Anthropic gives at least 60 days of notice before retirement of a publicly released model.	source
D6.5	API version 2026-10-21 removes the temperature, top_p, and top_k request parameters.	source
D6.5	A request that sends a removed parameter returns a 400 error on every model.	source
D6.5	Anthropic gives at least 60 days of notice before retirement of a publicly released model.	source
D6.5	Anthropic gives at least 60 days of notice before retirement of a publicly released model.	source

SECTION	FACT	SOURCE
D6.5	An organization can have up to 100 workspaces by default.	source
D7.1	A PreToolUse hook that exits with code 2 blocks the tool call before permission rules run.	source
D7.1	The default timeout for a command hook is 600 seconds.	source
D7.1	Keep each CLAUDE.md file under 200 lines.	source
D7.1	A PreToolUse hook that exits with code 2 blocks the tool call before permission rules run.	source
D7.1	The default timeout for a command hook is 600 seconds.	source
D7.1	Keep each CLAUDE.md file under 200 lines.	source
D7.2	Claude Code exits with code 0 on success and a non-zero code when the run fails.	source
D7.2	Piped stdin is capped at 10MB.	source
D7.3	Across enterprise deployments, the average cost is around $13 per developer per active day.	source
D7.3	The default export interval for metrics is 60000 milliseconds.	source
D7.3	Claude Code keeps file snapshots for the 100 most recent checkpoints in a session.	source
D7.3	Claude Code deletes a session's file snapshots about 30 days after the session last saved one.	source
D7.3	The cleanupPeriodDays setting sets the retention period, with a default of 30 days.	source