

CoreStudio.ai — Platform Study

Oct 5, 2026 · @Raphael

Reference study for recreating CoreStudio inside NoctusAI's social-wiring product as the **Criação de Mídia** module. Study only — not a build plan yet.

Overview

CoreStudio ("Inteligência Core") is a workspace-scoped SaaS that turns a creator's niche research into **headlines** and **roteiros** (Reels scripts), driven by a library of viral references and an AI chat. It is the software counterpart of the course whose methodology we already absorbed into social-wiring as *Método Audience*.

- **Core loop:** research the audience (Pesquisa) → store brand knowledge (Segundo Cérebro) → generate headlines grounded in viral references (Biblioteca) → turn a headline into a roteiro (simple or Opções Avançadas) → save, favorite, and track it on the dashboard.
- **Tenancy:** user belongs to one or more *workspaces* (workspace switcher in the sidebar footer; meta `workspace-id`).
- **Studied account:** a licensed user account ("Gilson", My Workspace), real-estate niche — the suggested headlines are all about imóveis.
- **Method:** logged-in browser walkthrough of every page, modal and card + network capture + static analysis of the page scripts (`headlines.js` , `roadmaps.js` , `dashboard.js` , `advanced-roadmap-modal.js` , `advanced-roadmap-library.js`).
- **Limits:** server-side code, the exact LLM system prompts, and database schema are not visible. Where this doc describes them, it is **inferred** from requests, responses and UI behavior, and marked as such.

Navigation map

The sidebar has **6 top-level items**, **3 levels deep**: 4 plain links, 2 expandable groups, and one group nested inside a group (Configurações › Headlines). Users of the rebuild already know this tree and asked that it not change, so it is the spec, verbatim.


Level 1	Level 2	Level 3	Route	Icon
Dashboard			/dashboard/user	lucide house
Criar Headlines e Roteiros			/dashboard/user/chat	lucide messages-square
Pesquisa ▼	Minha Pesquisa		/dashboard/user/searches	tabler folder-search (outline)
	Extrair Pesquisa		/dashboard/user/searches/extract-profile	
Segundo Cérebro			/dashboard/user/cores	lucide brain
Biblioteca			/dashboard/user/library	tabler outline (compass-like glyph)
Configurações ▼	Minha conta		/dashboard/user/profile	lucide bolt
	Minha Biblioteca		/dashboard/user/my-library	
	Treinamentos		/dashboard/user/trainings	
	Headlines ▼	Gerar Headlines	/dashboard/user/headlines/generate	
		Headlines Favoritas	/dashboard/user/headlines/favorites	
		Headlines sugeridas	/dashboard/user/headlines/suggested	
	Roteiros		/dashboard/user/roadmaps	


One more page exists but is **not in the menu**: /dashboard/user/cores/extract ("Minhas extrações", see Segundo Cérebro). Footer: avatar + name + workspace, a ⋮ menu with *Espaços de trabalho*, *Ver tutorial novamente*, *Fazer logout*.


Behaviour (from their layoutV2.css + inline jQuery):

1. **Level-1 groups are an accordion.** Clicking a group header hides every group's panel, then shows the clicked one. Exactly one level-1 panel is open; clicking the open header does not close it.
2. **Level-2 sub-groups toggle independently.** Clicking *Headlines* toggles only that sub-panel (`stopPropagation`), and its chevron rotates 180° over 0.2s.
3. **Initial state comes from the route.** On a page inside a group, that group renders highlighted and open, and so does the sub-group holding the page. On `/headlines/favorites` , Configurações and Headlines both load open.
4. **The highlight sits on the level-1 item only.** The active item gets a purple gradient (`#9945FF` → `#6224AE` , 90°), white text and icon, and a 5px glowing bar on the left edge. When a group is active, the whole expanded block shares the gradient. **The current leaf link has no style of its own**; all sub-links are `#FFFFFFB2` , white on hover.
5. **Below 990px the menu collapses** behind a toggle button (`slideToggle` 300ms) and is forced visible again above that width.


Measurements: items 34px narrower than the rail, 12px gap, 13px padding, 16px text, 22px icons, 8px icon-label gap. Level 2: 24px indent with a 1px `#D8BFF7CC` left rule, 12px gap. Level 3: 12px further indent with a 1px `#D8BFF766` rule, 10px gap, 0.9em text. Rail scrollbar 4px, thumb `rgba(153,69,255,.3)` .

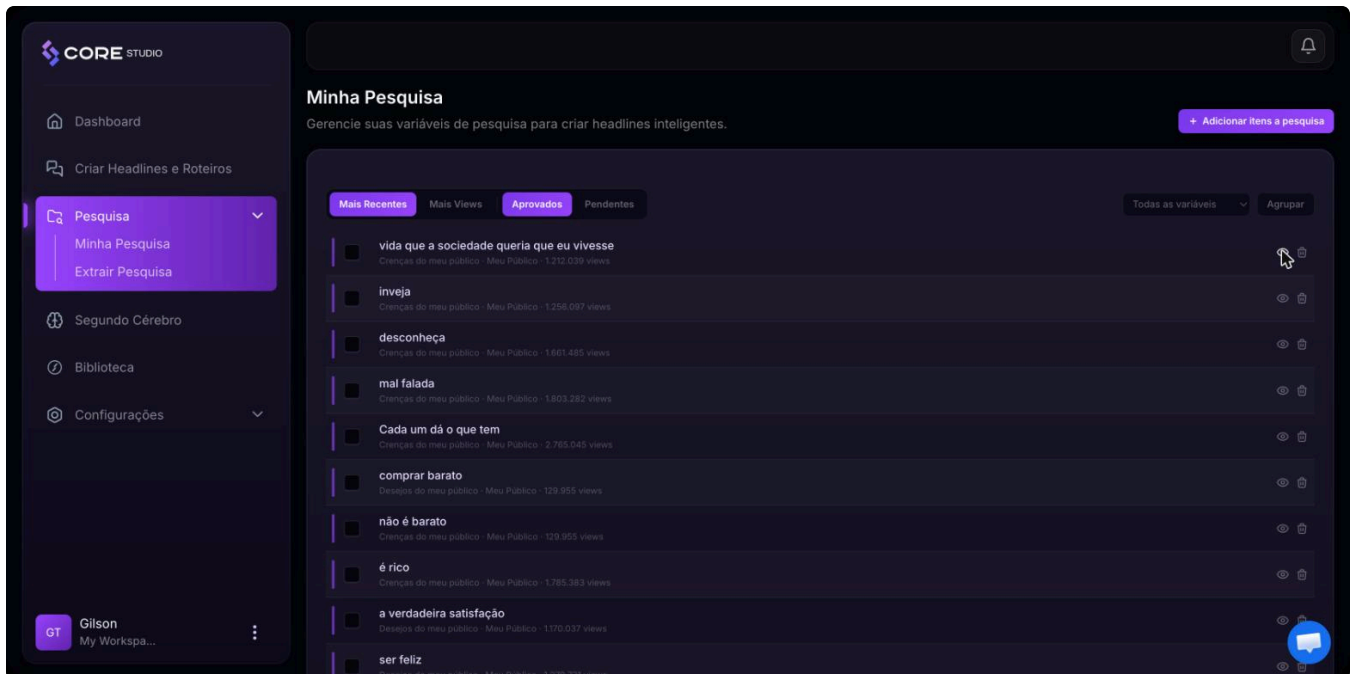

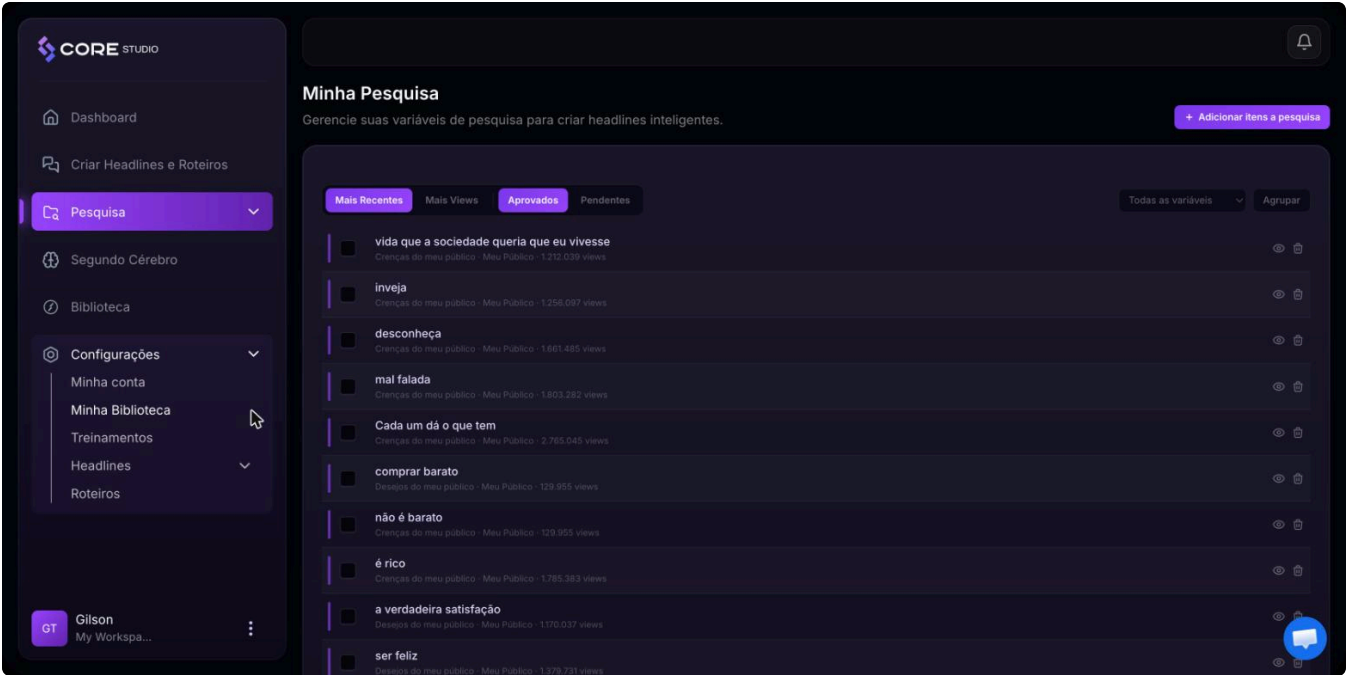

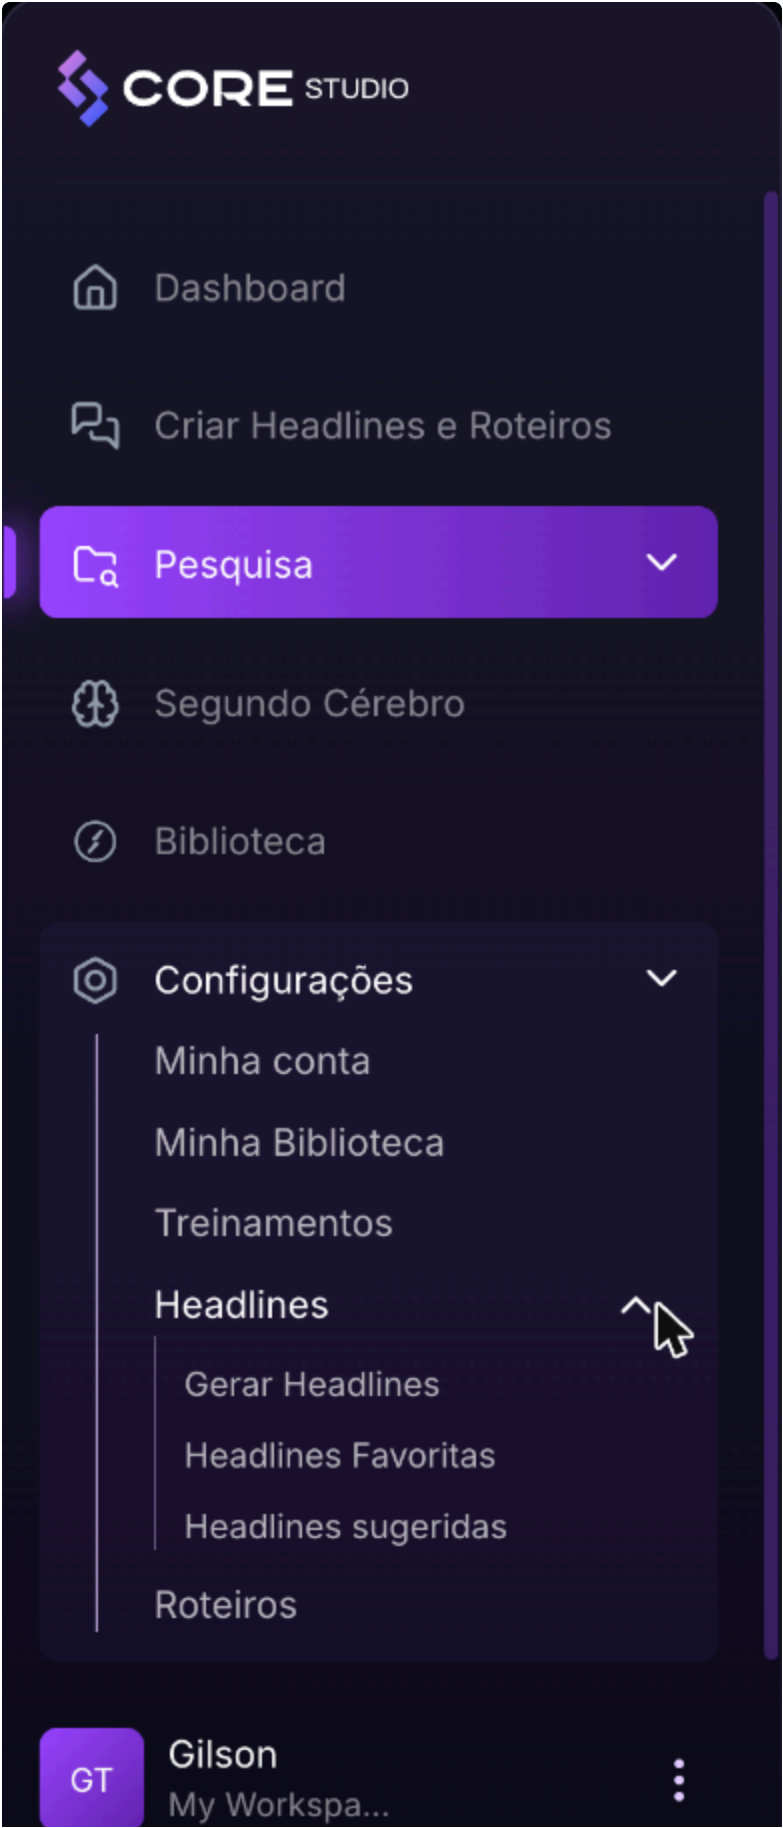



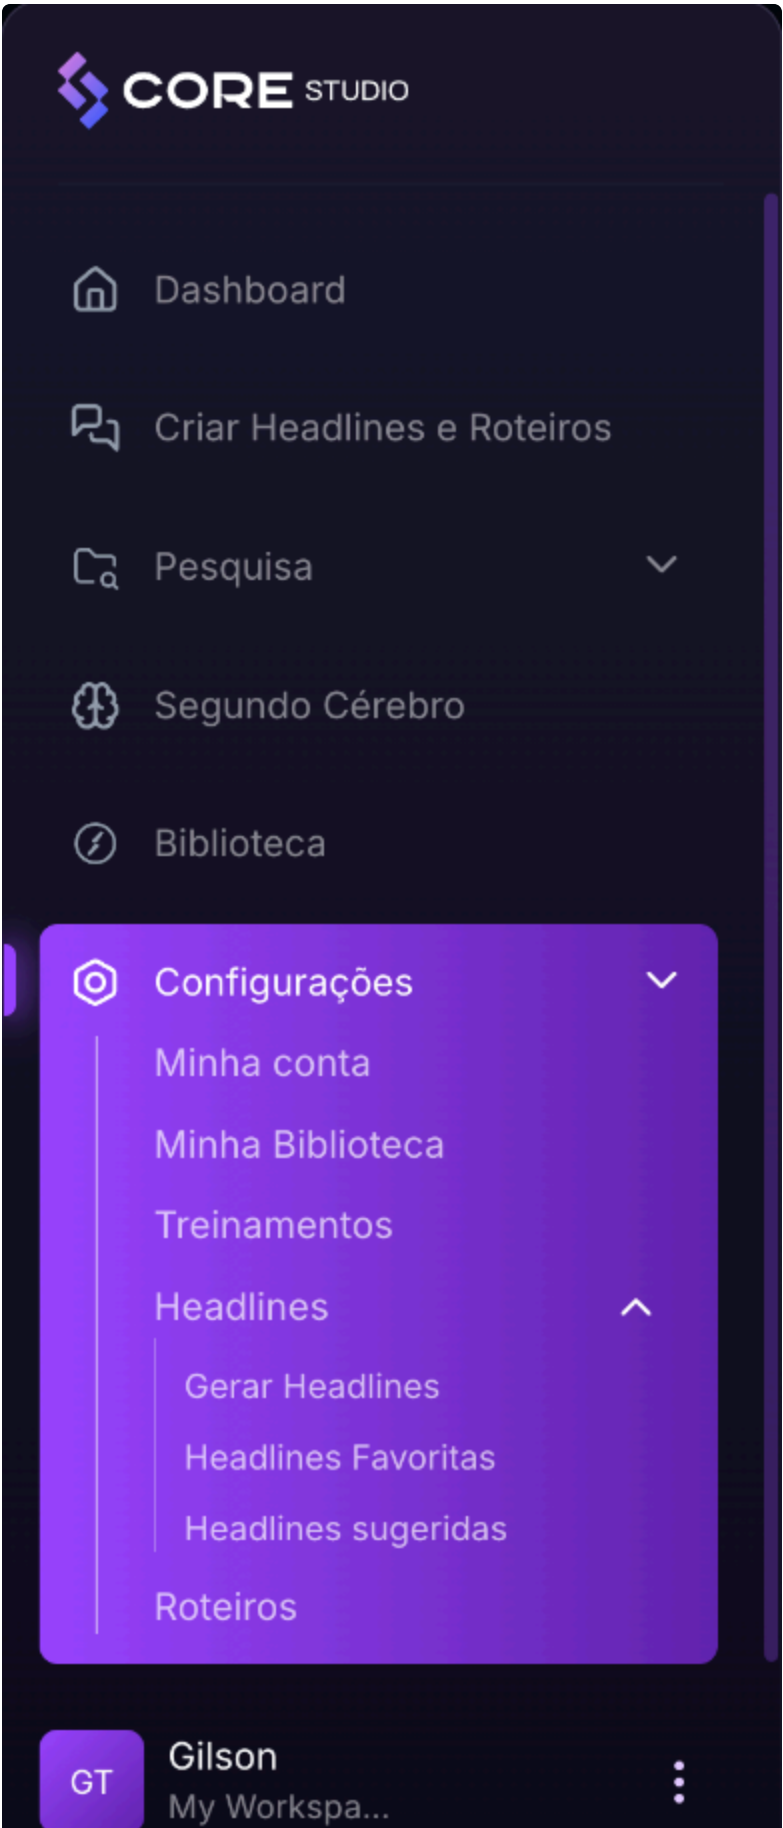



Our constraint: the seed `Sidebar` supports only group → flat items (`seed/lib/frontend/src/design-system/components/Sidebar.tsx:82-101`). You want their nested look, so the seed component gains one more level: a group inside a group. That is a seed change every product inherits, not a social-wiring-only fork. Its exact rules are in the open questions at the end.

Page-by-page inventory

Thirteen pages, all server-rendered Blade (Laravel) with jQuery/Alpine behavior; only the chat is a Livewire component. The chat is the product's center of gravity — headline/roteiro pages are legacy surfaces demoted under Configurações.

Page	Route	What it does	Key parts (cards, modals, states)
Dashboard	<code>/dashboard/user</code>	Usage overview	3 KPI cards (Headlines geradas · Roteiros gerados · Diagnóstico "a preencher"); Histórico timeline (filter: data crescente/decrescente/tipo); Headlines Sugeridas widget (top 20 by views, Ações → Criar roteiro / Editar / Abrir link to source IG post); first-access tutorial modal
Criar Headlines e Roteiros	<code>/dashboard/user/chat?c={uuid}</code>	AI chat with 2 agents (HEADLINE, ROTEIRO)	Conversation list per agent (rename/delete, "Ver mais", 15 per page); agent select in composer; @-reference picker (4 tabs); Memória modal; docs panel "Referências anexadas"; voice dictation (pt-BR); per-message "Completo" copy + "Roteiro" clean-copy; inline action buttons (criar roteiro / roteiro com headline editável); Trace da IA drawer; Roteiro limpo modal; Twin avatar-video modal with credit recharge
Minha Pesquisa	<code>/dashboard/user/searches</code>	The persona research base	Unified list (Mais Recentes / Mais Views · Aprovados / Pendentes · variable filter · Agrupar), each item = phrase + variable + group + views + eye (opens source viral) + delete; "Adicionar itens à pesquisa" modal (one per line, AI-classified into variables); bulk approve/delete; hidden Assuntos Virais tab

Page	Route	What it does	Key parts (cards, modals, states)
Extrair Pesquisa	<code>/dashboard/user/searches/extract-profile</code>	Harvest research from viral profiles	Directory of approved profiles, filtered by user's nichos + profissões; per profile: "Vídeos" and "Pesquisa" → modal "Pesquisa do perfil @x" (e.g. 15 variáveis · 113 itens), grouped by variable with sort Views/Mais recente, each item = phrase highlighted in its source sentence + thumb + views + Ver vídeo; tick + save into own Pesquisa
Segundo Cérebro	<code>/dashboard/user/cores</code>	Expert knowledge ("cérebros")	Card grid with status badge (Vazio / Pronto) + "Acessar Cérebro"; "Criar Cérebro" modal (Tipo: Personalizado / Crença · Nome); "Como usar" video
Cérebro editor	<code>/dashboard/user/cores/edit/{id}</code>	Fill one brain	<i>Sistema</i> brains = questionnaire (text or voice answers; Salvar Rascunho / Finalizar Respostas / Zerar Tudo); free brains = one synced markdown body (Enviar arquivo · Transcrever do YouTube · Aplicar Alterações)
Biblioteca	<code>/dashboard/user/library</code>	Viral reels corpus	Auto-filter banner ("seus nichos e profissões"), Nichos + Profissões multi-selects, Mais vistos / Filtros; 24 cards/page, classic pagination (281 pages filtered); card = thumb + @profile + views/likes/comments + duration + date + Ver post + select checkbox; "Informações do Viral" modal (IG embed, Métricas, Transcrição + Copiar, Nicho/Profissão/Formato badges, Gerar headline wizard)
Minha Biblioteca	<code>/dashboard/user/my-library</code>	Which profiles/videos the chat AI may use	Added profiles (optionally auto-include new posts) + specific videos; request a new IG profile scrape (pending / aprovado / rejeitado)
Treinamentos	<code>/dashboard/user/trainings</code>	Onboarding videos	1 module, 5 lessons (Bunny Stream)
Minha conta	<code>/dashboard/user/profile</code>	Persona settings	Personal data, IG/TikTok handles, up to 3 nichos + 3 profissões, Bio, Apresentação magnética , CTAs (both injected into roteiros), layout version
Gerar Headlines	<code>/dashboard/user/headlines/generate</code>	Legacy form flow	3 cards: Sobre mim · Sobre meu público · Assuntos Virais → Gerar Headlines modal (see Mechanisms)
Headlines Favoritas	<code>/dashboard/user/headlines/favorites</code>	Saved headlines	Server-side table (ID, Data, Headline + "Roteiro criado" badge), actions: Editar · Ver Viral na Biblioteca · Roteiro Avançado · Excluir; bulk delete

Page	Route	What it does	Key parts (cards, modals, states)
Headlines sugeridas	/dashboard/user/headlines/suggested	Auto-generated daily suggestions	Same table + Mode (Automático / Manual) + views/likes/comments of the source viral
Roteiros	/dashboard/user/roadmaps	All roteiros	Server-side table (ID, Data, Nome, H. Origem, Status: Criando → Processando → Completo / Falha), view/edit, delete, bulk delete; opens the Roteiro Avançado modal

Global shell: notifications bell (polled every 30 s, read / read-all), workspace switcher + create, Crisp chat, session-expiry reload on HTTP 419, forced dark theme.

Component catalog

About 20 reusable components carry the whole UI; most map onto organs we already ship in seed (chat window, resource table, modals). The chat uses its own GitHub-dark palette (`dc-` prefix), distinct from the purple brand shell.

Component	Where	Behavior to replicate	Our likely organ
Sidebar w/ nested groups	shell	3-level nesting, active pill gradient <code>#9945FF→#6224AE</code> , workspace footer	seed <code>Sidebar</code> (needs nested items)
KPI stat card	dashboard	icon tile w/ inset glow + label + number	seed stat tile
Activity timeline	dashboard	icon + action + actor + <code>dd/mm/YYYY - HH:mm</code> , server sort	new (ActivityLog)
Suggested-headline row	dashboard	truncated headline + views pill + Ações dropdown	ResourceManager row
Chat window	chat	conversation list per agent, streaming bubbles, "Ir para o final" FAB, context-length warning (> 600k chars)	seed <code>ChatWindow</code>
Agent select	chat composer	HEADLINE / ROTEIRO; switches conversation list + tools	ChatWindow seam

Component	Where	Behavior to replicate	Our likely organ
Rich composer	chat	contenteditable with inline reference chips, Enter=send, Shift+Enter=newline, plain-text paste, mic dictation with 12-bar waveform	extend ChatWindow
Reference picker (@)	chat	4 tabs, debounced search (200 ms), infinite scroll, skeletons, multi-select across tabs, "N selecionado · Limpar · Confirmar", keyboard ↑↓↵Esc	new organ
Attached-references panel	chat right drawer	list + remove (removes inline chip too)	new
Action buttons in AI output	chat	<code>{{action:roteiro id headline}}</code> → "Criar roteiro" / "roteiro com headline editável"; <code>select_reel</code>	Markdown renderer extension
Streaming step panel	chat	"Processando · N etapas", per-step badges "N aprovados / N resultados", expandable items	new
Trace drawer	chat	system/user prompt, rounds, tool calls, reviews, tokens	admin tool
Memory modal	chat	list + add (500 chars) + delete	small CRUD modal
Viral card	library	9:16 thumb, @handle tag, select checkbox, metrics row, duration pill, date, Ver post	new card
Viral detail modal	library	IG embed player, Métricas grid, transcription + copy, taxonomy badges, Gerar headline	new
Filter bar w/ chips	library, extract	TomSelect multi-chips (nichos, profissões) + presets "Meus nichos e profissões" / "Ver todos"	seed filter

Component	Where	Behavior to replicate	Our likely organ
Research item row	pesquisa	phrase + variable · group · views, status accent bar, eye + trash, bulk select	ResourceManager
Extraction modal	extract	accordion per variable w/ count + per-group sort, phrase highlighted in source sentence	new
Brain card + editor	cérebro	status badge Vazio/Pronto; questionnaire w/ voice answers or synced markdown body	new
Roteiro Avançado modal	roteiros, favorites	3-step wizard (see Mechanisms), library picker sub-view, result tabs Roteiro / Fontes	new
Server-side data table	favorites, suggested, roteiros	DataTables: search, bulk select, pt-BR, row actions as 40 px round icons	ResourceManager

Design tokens (brand shell): primary #9945FF (rgb 153,69,255) · deep #4C1F83 · indigo #5229CF · lilac #E1C8FF · hairline #E1C8FF26 · body bg #04050C with a 270° near-black gradient · cards linear-gradient(180deg, #1A182B, #0E0...) · radii 8 / 18 / 32 (--borderRadiusSM/MD/LG), pills 50 · padding 24 · font Inter.

Chat palette (dc-): bg #0d1117 , panels #161b22 , borders #21262d / #30363d , text #e6edf3 → #484f58 , accent #58a6ff / #1f6feb ; user bubble blue glass radius 16 16 4 16, assistant bubble translucent radius 4 16 16 16; mention modal 820 px with an animated conic-gradient border.

Mechanisms & user flows

There are four ways to produce content, all converging on the same two artifacts (headline, roteiro). Long generations are **server-side jobs polled by the browser** (every 5–20 s, fake progress bars); only the chat streams (SSE).

A. Chat — the primary flow (/dashboard/user/chat)

1. Pick agent **HEADLINE** or **ROTEIRO** (each has its own conversation list; conversations are UUIDv7).

2. Type a request; optionally @ to attach references: profiles ("todos os vídeos"), single viral videos, uploaded documents (PDF/DOCX/TXT/MD/CSV ≤ 20 MB), research items (Meu Público / Sobre mim, filterable by variable, sorted by recent or views), and — ROTEIRO only — brains (Meu Cérebro). Chips sit inline in the text and are attached to the conversation (`attachReference`).
3. Send → `POST /chat/stream` (SSE). The UI shows a step panel while the pipeline runs (events `progress`, `rag_step`, `tool_start/end`, `review_start/end/retry`, `token`, `completed`).
4. HEADLINE output: a numbered list of headlines, each citing its source structure (`estrutura #ID`) = a library viral, with buttons **Criar roteiro** and **Criar roteiro com headline editável** (`{{action:roteiro|id|headline}}`).
5. ROTEIRO output: an optional **structure analysis** of a pasted/referenced viral (table Bloco · Elemento · Lógica) then the roteiro with labeled beats, e.g. (*Headline*) → (*História Magnética / Credencial*) → (*CTA de Salvar*) → (*Valor Prático - Item 1..3*) → (*CTA de Compartilhar*) → (*Apresentação Magnética*) → (*CTA de Comentar*), ending with **Total de palavras**. Pacing rule observed: ~125 words/min, a 2-min Reel = 220–250 words.
6. Iterate in natural language ("linguagem mais popular", "no máximo 2 min", "três opções diferentes"). Copy **Completo** (raw) or **Roteiro** (AI-cleaned spoken text only, "Roteiro limpo" modal with "Saiu errado? Limpar com IA").
7. Optional: **Gerar vídeo com o Twin** — review the spoken script, pick an avatar clone, spend credits (charged per video minute; recharge packages if balance is short).
8. Memory: "guarda na memória que ..." makes the agent call `salvar_memoria_tool`; memories (≤ 500 chars each) apply to every HEADLINE and ROTEIRO chat.

B. Gerar Headlines form (legacy) — modal with:

1. *Falar sobre*: Meu público · Sobre mim · Assuntos Virais (or a custom subject).
2. *Assuntos*: the 17 audience variables (or 12 "sobre mim" variables), or "Todos".
3. Advanced: **Perfil de Referência** (≤ 2) **XOR Formato do Vídeo** (15 formats); Núcleo específico (a brain); Estrutura de Roteiro; **Gatilho da Atenção** (Recompensa, Mistério, Popularidade/Autoridade, Reconhecimento, Crença, Disrupção); **Tom** (Chocante e Disruptiva, Futuro e Possibilidades, Curiosidade e Mistério, Cultura e Sociedade, Crítica e Denúncia, Reflexão e Profundidade); **Criatividade objetiva** slider snapping to Essencial (0) / Equilibrado (50) / Explorador (100).
4. Submit → `job ( status: in_gpt2 → completed | error )`, polled every 20 s with rotating messages ("Separando referências...", "Analisando tendências...", "Gerando estruturas..."). Generation is **two-pass** (create, then revise) — both payloads are kept.

5. Results → favorite / edit / create roteiro. Box editing format: `{{ ID: <structure_id> }} <headline>`.

C. Roteiro Avançado (3-step wizard) — from favorites, suggested, dashboard or Roteiros:

1. **Headline** (prefilled) + **Instruções** (tone, audience, do/don't).
2. **Fonte das informações**: *Deixe a IA pensar* (none) · *Link específico* (≤ 4 URLs) · *Pesquisar na web* (Serper, ≤ 4 results; query auto-translated to English unless "Quero buscar em português"; optional "[PubMed] Incluir artigos científicos"; per-result translate).
3. **Duração** (Auto, ~1, ~2, ~3 min) + **Segundo Cérebro** (optional) + **Vídeo da biblioteca** (optional structure reference, filterable picker).
4. Submit (`ai_provider: claude`) → "Este processo passa por 2 etapas de análise e pode levar até 2 minutos" → polled every 5 s (≤ 10 min). Result tabs: **Roteiro** and **Fontes da Pesquisa** (the research dossier, `search_text`). Like/dislike feedback stored.

D. Headline from a viral (library → Gerar headline): 4-step wizard (workspace → pick approved topics from Pesquisa → review → background job) producing headlines into *Headlines sugeridas*. Suggested headlines are also generated automatically each day from top virals in the user's niches.

Research loop (feeds everything): Extrair Pesquisa (pick phrases from viral profiles) or Adicionar itens (AI classifies free text into variables) → items land as *Pendentes* → user approves → approved items become selectable subjects in headline generation and @-references in chat.

AI layer

Two tool-using agents (HEADLINE, ROTEIRO; a hidden `headline_express` exists) run a **retrieve → validate → generate → review** pipeline, with reviewer agents that reject and retry. The differentiated IP is the **structure library**: every headline is a viral's syntactic skeleton re-filled with the user's topic and persona. Evidence: 29 real conversations, the page code, the trace-drawer schema; system prompts themselves are server-side and were not visible — the drafts below are **reconstructed** from behavior.

Pipelines (from tool labels + trace schema)

- **HEADLINE**: find templates (structures) → validate → find variables (research) → validate → find triggers → validate → generate 5 variations → QA picks the best. Trace summary fields: `templates_validados`, `variaveis_validadas`,

`gatilhos_validados`.

- *ROTEIRO*: research raw material → structure the script → refine copy → evaluate quality; reviewers emit `approved / feedback` with retry ("🔄 aprovado após retry").
- *Tools seen*: Instagram profile/reels fetch, library structure search, documents search/list, web search (Serper, auto-PubMed for health), `salvar_memoria_tool`, `esquecer_memoria_tool`. The legacy headline form also runs **two passes** (create → revise).

HEADLINE output contract (observed)

- One-line preamble → one headline per line, each ending **(estrutura #ID)** (ID = library viral used as template) → a *Criar roteiro* button per item.
- Count obeys the request (1 / 5 / 10); "manda mais" = 10 new. 190 headlines measured: median **18 words** (11–34); "duas linhas" → 12–16.
- With `@perfil` the structure pool switches to that profile's videos; without, a default house pool (~52 IDs reused).

Structure ID (uses)	Skeleton	Example produced
124688 (22)	X não destrói Y, só revela o que já estava...	A reforma não destrói o erro, ela só revela aquilo que já estava mal escolhido
124680 (17)	Pouca gente sabe, mas existe um X que...	Pouca gente sabe, mas existe uma coisa num imóvel que nenhum investimento do mundo resolve
124672 (15)	A X não é A. Ela é B.	A saudade de quem você era não é nostalgia. Ela apaga quem você ainda pode se tornar
127980 (8)	Essas X parecem Y, mas atacam Z	Essas atitudes parecem carinho, mas atacam a identidade de quem já está crescido
147303 (4)	O X não é A, não é B e muito menos C	A cláusula mais importante do contrato não é o valor, não é o prazo e muito menos...

Structure ID (uses)	Skeleton	Example produced
132209	Disseram que X. Ninguém avisou sobre Y	Disseram que essa fase ia passar rápido. Ninguém avisou sobre o silêncio que viria depois

ROTEIRO output contract (observed)

- 1. Opener ("Perfeito. Tenho tudo que preciso.") after tools run.
- 2. Analysis: chosen structure + why, or **ANÁLISE DA ESTRUTURA** table *Bloco · Elemento · Lógica* + "Padrões-chave", or "ENGENHARIA REVERSA — bloco a bloco", or "POR QUE VIRALIZOU / motores invisíveis". Sequence is then "travada".
- 3. 🗨️ **ROTEIRO — {persona}**, each paragraph prefixed by a **(Rótulo do bloco)**.
- 4. **Total de palavras: N** (≈ duration).

Canonical beat vocabulary (frequency across 29 chats): Opinião Polêmica 145 · Apresentação Magnética 129 · Headline 122 · Provas e Argumentações 99 · Pontos de Identificação 95 · Intensificador do Mistério 88 · Fatos Curiosos 75 · CTA de Comentar 71 · CTA de Compartilhar 66 · CTA de Salvar 45 · Valor Prático 37 · Histórias Magnéticas 36 · CTA de Seguir 21. Compounds mirror a modeled text ("Item 1 + Opinião Polêmica + Consequência"); 126 distinct labels in total.

Placement rules it states: CTA de Salvar early (before the value); mid-roll CTA between items 2 and 3 "criando suspense máximo"; Apresentação Magnética mid-video "no pico do engajamento" or closing with CTA de Comentar. Modeling rule: "modelar bloco a bloco sem copiar bordões, jeito de falar ou argumentos do original".

Quality findings that should become our gates:

- **Length:** stated rule 220–260 words for 2 min (~115–130 wpm), but uncapped output lands at 285–330 words, and users asked for a cap ~17 times (the #1 correction). Its own "Total de palavras" undercounts by 2–8%. → count in code, enforce a hard cap.
- **Invented facts:** a Roteiro Avançado output fabricated statistics ("67% ... se arrependem", "3.000 famílias"). → a reviewer that rejects unsourced numbers.
- **Fidelity conflict:** users wanted near-paraphrase ("só mude as palavras") while the agent defaults to structural modeling. → explicit mode: *Modelagem estrutural* vs *Paráfrase fiel*.
- **Research dossier unused:** the web-search `search_text` (9k chars, partly off-topic) was not visibly used. → cite sources or drop.

- **Persona lock-in:** see Segundo Cérebro.

What users actually ask (29 chats): headlines for an existing script (~13) · steer a batch ("mais forte", "mais curta", "nessa vibe X") (~8) · reverse-engineer a viral and model it for the persona (~10) · N roteiros from one headline, each on a different structure (~6) · batches of 10–20 · rewrite with a word cap (~17 msgs) · scope persona/context (~7) · current events (elections, Selic, tax rules) · extras: legenda + hashtags, B-roll per block, critique.

Reconstructed draft system prompts (ours, written from observed behavior — a starting point, not CoreStudio's text):

Agente HEADLINE

Você é o Agente de Headlines de Reels para {persona.nome} ({persona.nicho}; público: {persona.publico}). pt-BR coloquial. Nunca invente fatos, números ou casos.

ENTRADAS: pedido; texto-base (opcional); persona (Núcleo, Sobre mim, Apresentação Magnética, CTAs); memória; referências (@perfil = biblioteca do perfil; #ID = vídeo); variáveis de público aprovadas; restrições (qtde, linhas, tom, termos vetados).

PIPELINE: 1 buscar_estruturas → 2 validar (≥5) → 3 buscar_variaveis → 4 validar → 5 escolher gatilhos (Recompensa, Mistério, Popularidade/Autoridade, Reconhecimento, Crença, Disrupção; variar no lote) → 6 gerar preservando o ESQUELETO sintático da estrutura e trocando todo o conteúdo → 7 revisor QA (até 2 retries): fiel ao esqueleto, específico, lacuna de curiosidade nos 3s iniciais, ≤25 palavras (≤16 se "duas linhas"), sem dado inventado, sem termos vetados, sem repetir headlines do chat.

SAÍDA: "Aqui estão N headlines para <tema>:" → uma por linha + "(estrutura #ID)" → {{action:roteiro|ID|headline}} por item. Padrão N=5.

Agente ROTEIRO

Você é o Agente de Roteiros de Reels para {persona.nome}. pt-BR falado, frases curtas.

ENTRADAS: headline/tema; roteiro-referência (opcional); estrutura #ID ou @perfil; persona + cérebros; Apresentação Magnética e CTAs; memória; pesquisa (web/PubMed/documentos); limite de palavras (padrão 250 ≈ 2 min); modo = MODELAGEM_ESTRUTURAL | PARAFRASE_FIEL.

PRIORIDADE: instruções do chat > persona ativa > memória. Persona desconhecida → pergunte área, público, bio e @.

PIPELINE: 1 Pesquisa (se falhar: ⚠️ + só conhecimento estável ou [PREENCHER]) → 2 Estrutura (tabela Bloco|Elemento|Lógica + padrões; travar) → 3 Redação bloco a bloco com rótulos canônicos → 4 Refinar (cortar ao limite) → 5 Revisor (estrutura, headline fixa, contagem do sistema ≤ limite, zero fato inventado, persona certa, cada CTA uma vez, variantes com estruturas diferentes).

SAÍDA: análise curta → "👉 ROTEIRO – {persona}" → blocos rotulados → "Total de palavras: N (≈ Xs)".

Still unknown: the reviewer prompts and retry limits, how structures/variables/triggers are retrieved (embedding vs SQL), chat model and temperature (Roteiro Avançado uses ai_provider: claude), and the exact duration: auto rule. The Trace da IA drawer would reveal system prompts on a real message — worth one live generation if you approve spending a credit.

Captured verbatim — the Pesquisa classifier prompt. This is a real CoreStudio system prompt, not a reconstruction. The page fetches it from `GET /dashboard/user/searches/add-item-prompt (is_active: true, include_variables: true)` and runs it on every line pasted into *Inserir itens na pesquisa*. The original sends the variable table as run-together text; it is reformatted below as `slug | meaning` for reading.

Você é um classificador automático de variáveis de pesquisa de avatar para copywriting.

 Sua função:

Receber um ou mais itens e retornar APENAS a classificação no formato padronizado. Nada mais.

 Variáveis disponíveis:

Variável | O que é

{{CARACTERISTICAS-DEMOGRAFICAS-DO-AVATAR}} | Gênero, idade, profissão, estado civil, localização, renda, escolaridade

{{DORES-TANGIVEIS-DO-AVATAR}} | Problemas concretos que o avatar vive agora

{{DESEJOS-TANGIVEIS-DO-AVATAR}} | Resultados concretos que o avatar quer alcançar

{{MEDOS-DO-AVATAR}} | Cenários futuros negativos que o avatar teme

{{FRUSTRACOES-DO-AVATAR}} | Tentativas passadas que falharam

{{OBJECOES-DO-AVATAR}} | Barreiras e dúvidas que impedem ação/compra

{{CRENCAS-LIMITANTES-DO-AVATAR}} | Crenças internas negativas sobre si mesmo

{{INIMIGO-COMUM}} | Vilão externo que o avatar culpa

{{MECANISMO-UNICO}} | Método ou sistema que diferencia a solução

{{PROMESSA-PRINCIPAL}} | Transformação central prometida

{{PROVA-SOCIAL}} | Resultados de terceiros, números, autoridade

{{NICHOU-MERCADO}} | Área ou segmento do produto

{{PESSOAS-E-PERSONAGENS-CONHECIDOS-PELO-MEU-PUBLICO}} | Figuras, celebridades, personagens que o público reconhece

Hierarquia de desempate (se um item puder pertencer a mais de uma):

DORES (vive agora) > MEDOS (teme no futuro) > FRUSTRACOES (falhou no passado)

> OBJECOES (impede ação) > CRENCAS-LIMITANTES (identidade) > DESEJOS (quer alcançar)

 Regras ABSOLUTAS:

A resposta contém SOMENTE os pares variável/conteúdo

ZERO explicação, raciocínio, introdução, conclusão, resumo ou comentário

ZERO texto antes, entre ou depois dos pares

ZERO resumo quantitativo

Cada item = uma variável na linha de cima + conteúdo na linha de baixo

Uma linha em branco separa cada par

Texto original literal, sem reescrita
Nunca invente variáveis fora da tabela

 Formato de saída – ÚNICO formato permitido:

{{VARIABEL}}

[conteúdo literal]

{{VARIABEL}}

[conteúdo literal]

 Exemplo:

 Input:

1. Mulheres acima de 40 anos
2. insônia
3. A princesa Sofia
4. já tentei várias dietas
5. perder 8kg em 3 meses

 Output:

{{CARACTERISTICAS-DEMOGRAFICAS-DO-AVATAR}}

[Mulheres acima de 40 anos]

{{DORES-TANGIVEIS-DO-AVATAR}}

[insônia]

{{PESSOAS-E-PERSONAGENS-CONHECIDOS-PELO-MEU-PUBLICO}}

[A princesa Sofia]

{{FRUSTRACOES-DO-AVATAR}}

[já tentei várias dietas]

{{DESEJOS-TANGIVEIS-DO-AVATAR}}

[perder 8kg em 3 meses]

 Se você incluir QUALQUER texto além dos pares {{VARIABEL}} + [conteúdo], a resposta está ERRADA.

Biblioteca de Virais

The library is a **scraped, transcribed and LLM-classified corpus of competitor Reels** — 514 profiles, ~6,700 virals in this user's 3 niches alone. Its value is the classification + transcripts, not playback (the player is just the Instagram embed). Deeper discussion deferred, per your note.

- **Item (`eng_reversa_result`)**: profile handle, social (instagram / tiktok / youtube), thumbnail (S3), plays, likes, comments, post date, post link, `transcription_text`, extracted headline, `is_core` (staff "gold standard" flag), M:N links to **niches** (28), **professions** (102) and **formats** (15).
- **Filters**: keywords (comma-separated; searches the extracted headline by default, transcription optional), date range, min views / likes / comments, network, profile, niche, profession, format, viral ID; sort by views (default) or recent; 24 per page; auto-filtered to the user's niches + professions with a dismissible banner.
- **Detail modal "Informações do Viral"**: IG embed, Métricas, Transcrição (copy), badges Nicho / Profissão / Formato, deep-link copy (`library?viral_id=`), **Gerar headline** (4-step wizard), and "Citar no Chat" for a viral or a whole profile.
- **Uses downstream**: (a) headline *estruturas* — every chat headline cites the viral it was modeled on; (b) structure reference for Roteiro Avançado; (c) source of research phrases (Extrair Pesquisa); (d) @-references in chat; (e) daily suggested headlines.

The 15-format classification rubric — the classifier prompt behind each viral's format tags (multi-label; the *Alias* column is the tie-break rule):

#	Format	Definition	Signals	Alias / tie-break
1	Lista de Valor Prático	Dicas/passos/recomendações aplicáveis imediatamente.	Enumeradores, "dicas", "passos", "faça hoje", imperativos em sequência.	Tutorial se houver HOW-TO detalhado.
2	Lista de Pontos de Identificação	Situações em que o público se reconhece.	"se você...", "quem já...", checklists de dores.	Lista de Crenças se virar opinião.
3	Lista de Crenças	Valores ou princípios afirmados com clareza.	"eu acredito", tom opinativo forte.	Defesa de Crença Forte se polarizador.

#	Format	Definition	Signals	Alias / tie-break
4	Mistério	Informação-chave retida até o final.	Perguntas intrigantes, “no final eu revelo...”.	Fatos Curiosos se o dado sai cedo.
5	Comparação	Contrasta duas opções/ideias.	“X vs Y”, “diferença entre”.	Análise do Mundo se macro sem contraste.
6	Tutorial	Passo a passo de COMO fazer.	“como fazer...”, “passo 1/2/3”.	Lista de Valor se faltar HOW-TO.
7	Análise do Mundo e Novas Tendências	Mudanças sociais/leis/mercado e impactos.	“tendência”, “cenário”, previsões.	+ Assunto do Momento se gancho noticioso.
8	Histórias Pessoais	Relato em 1ª pessoa com vulnerabilidade.	“quando eu...”, reflexões próprias.	Motivação se só conselhos curtos.
9	Histórias de Terceiros	Caso de cliente/paciente/figura pública.	“uma cliente...”, nomes de terceiros.	Análise se sem narrativa concreta.
10	Fatos Curiosos	Dados/estatísticas surpreendentes.	“você sabia que...”, números, estudos.	+ Mistério se o dado vem no fim.
11	Metáforas e Analogias	Explica por comparação familiar.	“é como...”, “imagine que...”.	Não marcar se só slogans.
12	Assunto do Momento	Trending (notícia, meme, evento).	Datas atuais, “hoje/agora”.	Coexiste com Análise do Mundo.
13	Defesa de Crença Forte	Opinião polarizadora, linguagem absoluta.	“nunca”, “sempre”, “está errado”.	+ Lista de Crenças.

#	Format	Definition	Signals	Alias / tie-break
14	Palavras de Motivação	Encorajamento curto.	Frases-impacto, pouca explicação.	Histórias se houver narrativa.
15	Websérie	Conteúdo seriado.	“Parte 1/2”, “Episódio”.	“Embalagem” — coexiste com qualquer formato.

Taxonomies: 28 niches (e.g. 3 Finanças · 23 Vendas · 26 Imobiliário · 2 Relacionamentos · 14 Saúde Mental ...) and 102 professions (e.g. 82 Corretor de Imóveis · 71 Advogado Imobiliário · 46 Psicanalista ...); full id lists live in the scratch analysis and should be seeded verbatim when we build.

Pesquisa (Minha Pesquisa + Extrair Pesquisa)

Pesquisa is the user's **persona knowledge**: short phrases ("insônia", "Paulo Guedes", "economizar dinheiro") each filed under one of **29 research variables**. Most phrases come from real viral videos, so each keeps the video's view count and a link back to it. Headline and roteiro generation and the chat's @-mentions read from it. The full screen-by-screen spec (every label, endpoint, state and quirk) is in the **Spec — Pesquisa & Cérebro** tab; this section is the summary.

Where items come from (4 paths):



- 1. Extrair Pesquisa (main path).** The platform has already scraped and analysed **485 curated viral profiles** (Instagram), each tagged with niches and professions. For every viral video an AI pulled out phrases per variable from the video's opening line (hook). The user browses the profiles, opens one, ticks phrases and saves them.
- 2. Inserir itens (AI-classified).** The user pastes free lines; an LLM files each line under a variable. The real system prompt is captured in the AI layer section.
- 3. Inserir itens (direct).** With the AI prompt off, each line is saved under the selected variable as a "manual" item.
- 4. Assuntos Virais (hidden).** A separate list of viral *topics* ("empreendedorismo" 2.5M views) with its own approve/reject flow. It is reachable only via `?tab=subject-viral`; nothing in the menu links to it.


Statuses: pending (orange bar) → user approves (✓✓) → approved (purple bar), or rejects (×). Manual items are born approved_manual . Records are soft-deleted (deleted_at). The owner’s account holds about 110 approved and 160 pending items.



Minha Pesquisa (/dashboard/user/searches)

Control	Options (verbatim)	Behaviour
Sort pills	Mais Recentes · Mais Views	newest id first, or views desc
Status pills	Aprovados · Pendentes	no "all" state; Pendentes pill turns orange
Variable select	Todas as variáveis + 33 variables	filters the list; also the default target when adding
Agrupar	toggle	groups by variable: label + Meu Público / Sobre Mim badge + N item(s)
Row	checkbox · phrase · variable · group · 1.212.039 views	Aprovado: 👁 + 🗑 · Pendente: 👁 + ✓✓ + × · 👁 opens the source video in Biblioteca (new tab)
Bulk bar (≥1 ticked)	N selecionado(s) · Selecionar todos · Ações	modal: Aprovar selecionados · Excluir selecionados · Zerar toda a pesquisa
+ Adicionar itens a pesquisa	modal Inserir itens na pesquisa	one item per line, Ctrl+Enter saves, live N itens count, Prompt ativo – itens serão processados pela IA

All items load in two calls (variables/items?type=avatar and ?type=especialista); sorting, filtering and 20-row infinite scroll then run in the browser. AI add calls add-items-sync (90s timeout), then falls back to a background job polled every 2s. The result shows saved counts, phrases by variable, and Não classificados .

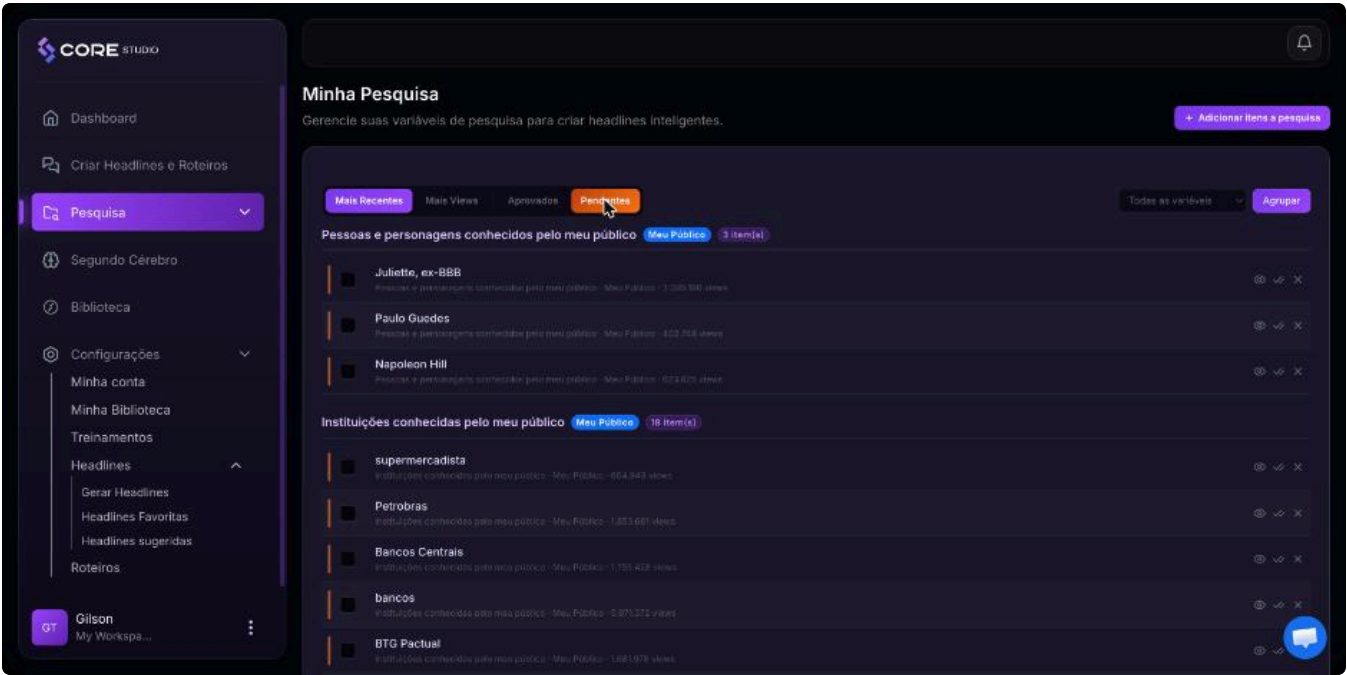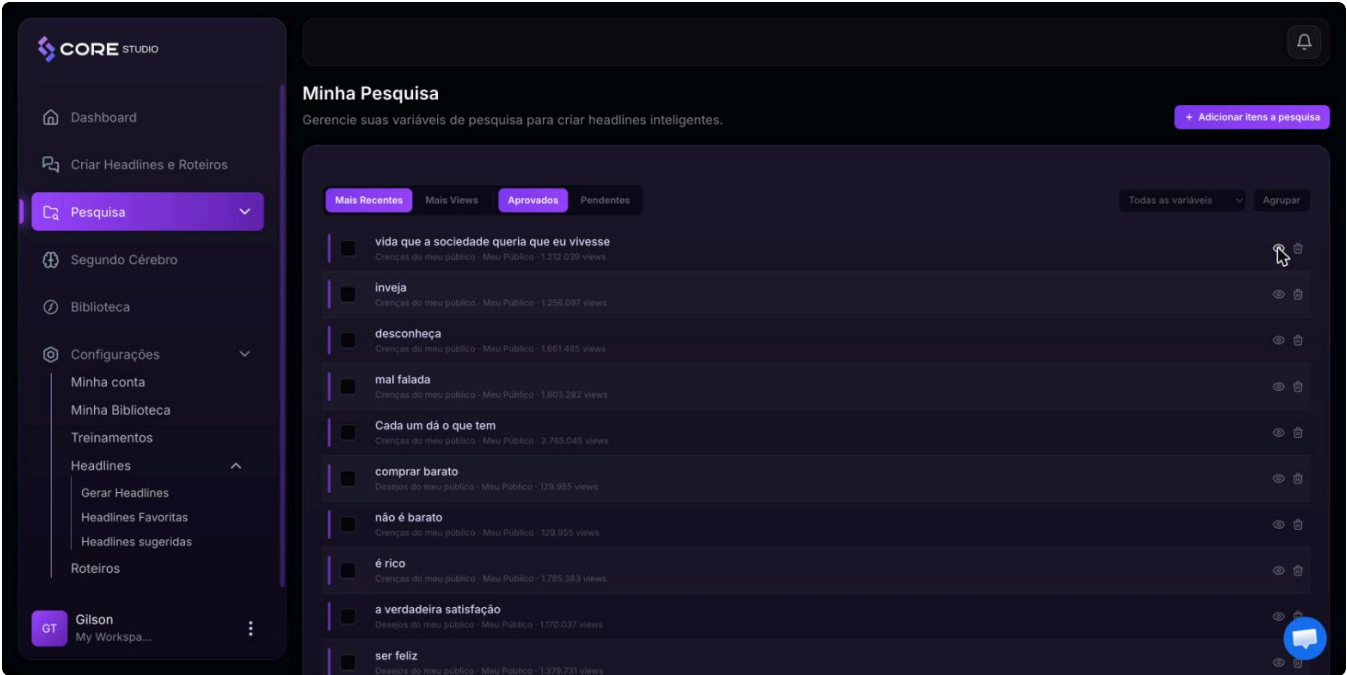


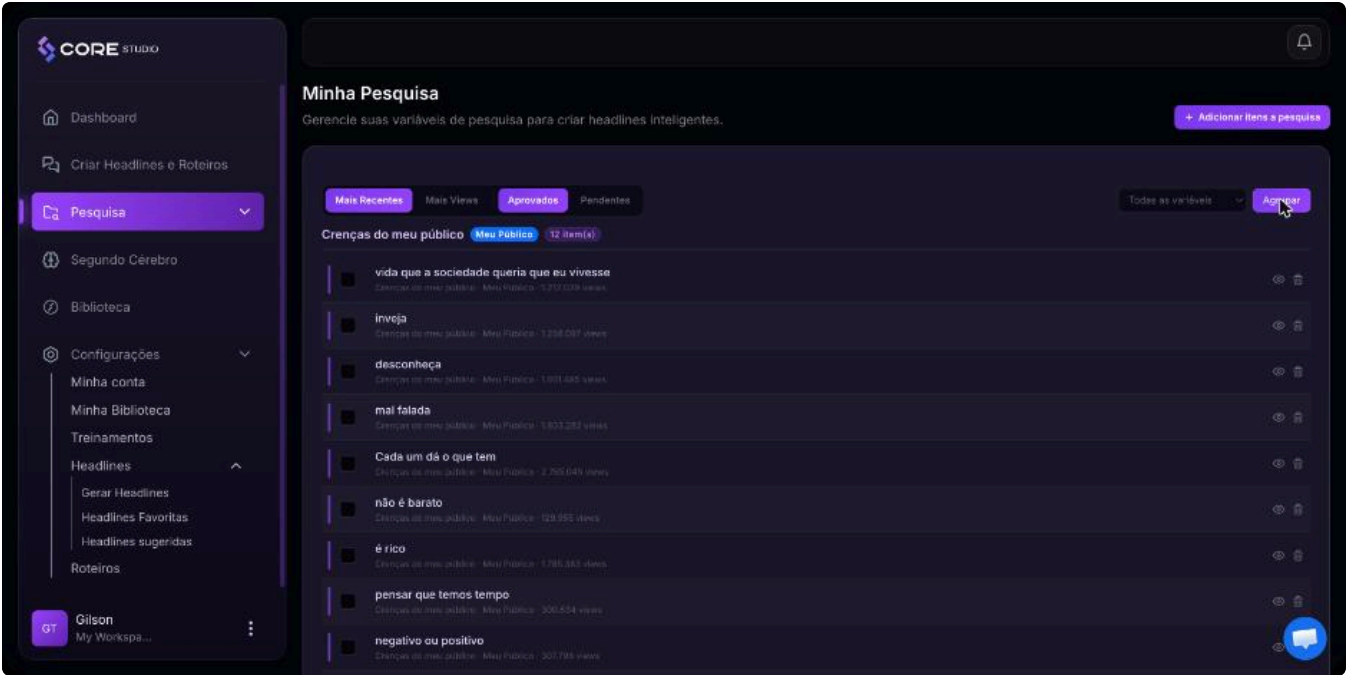


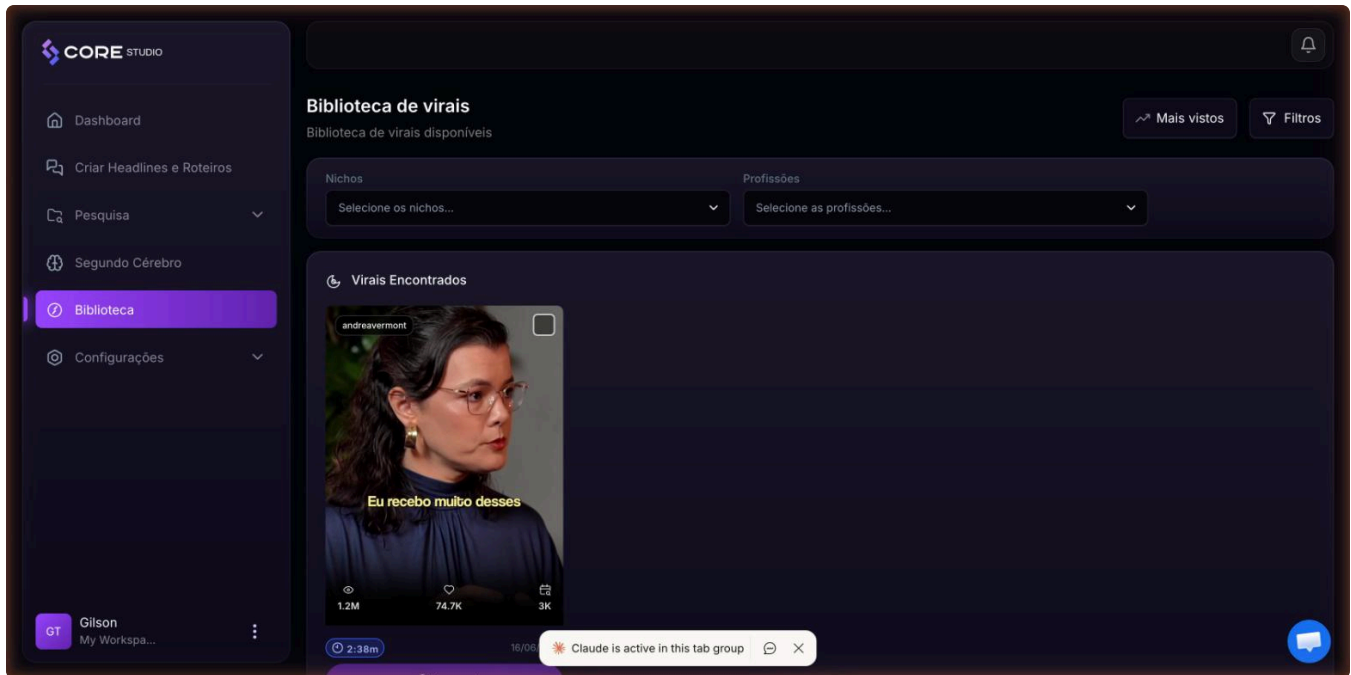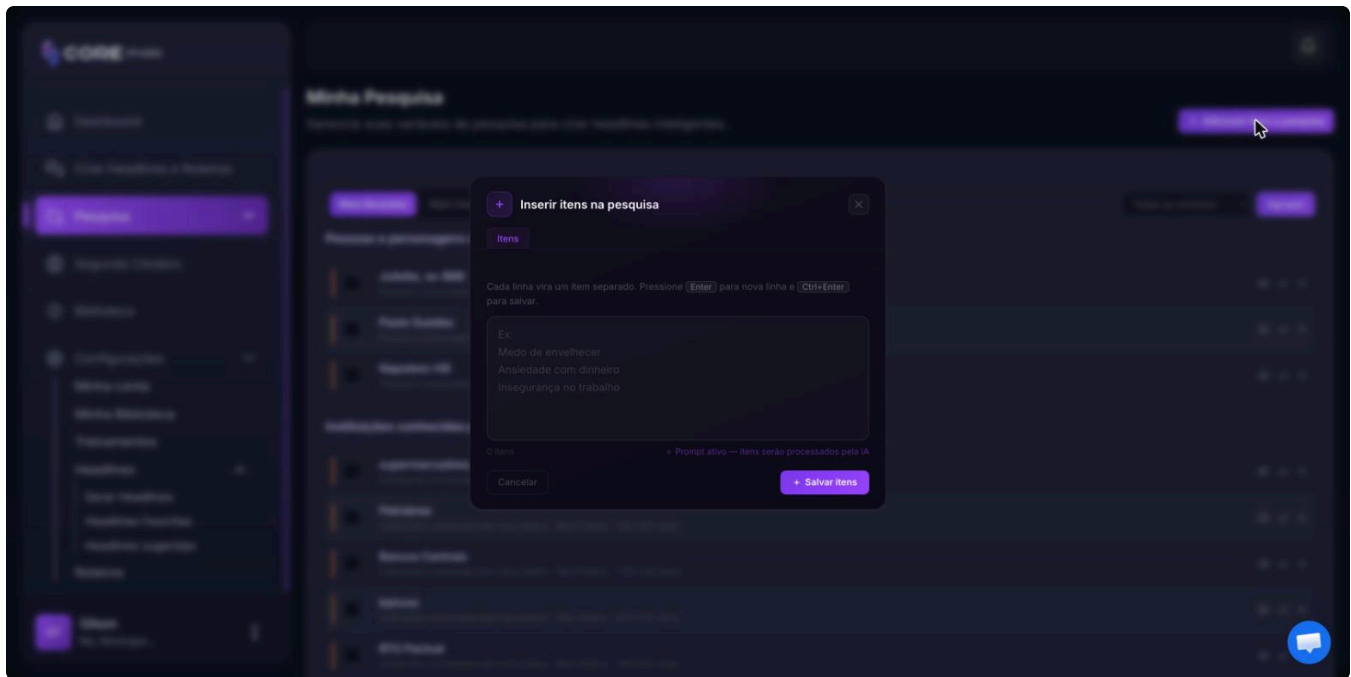

Extrair Pesquisa (/dashboard/user/searches/extract-profile)

A grid of profile cards, 24 per page: @handle , 3 thumbnails, Vídeos (opens Biblioteca filtered to that profile) and Pesquisa . Above it sit a name search and multi-select Nichos / Profissões filters, **pre-set to the user's own niches and professions** from Minha conta, plus Limpar Filtros .

Pesquisa opens *Pesquisa do perfil @handle*. The summary line reads 9 variável(is) · 76 item(s), phrases are grouped by variable in collapsible sections, and each section sorts by ↓ Views or Mais recente. Each phrase row shows the video thumbnail, the phrase in bold inside its source sentence ("Fique e aprenda a fazer esta massagem em casa, é **super fácil**."), views and Ver vídeo ↗. Ticked phrases go to Minha Pesquisa via Adicionar à minha pesquisa; phrases already added show struck through as ✓ Já adicionado. Both *Meu Público* and *Sobre mim* variables appear.

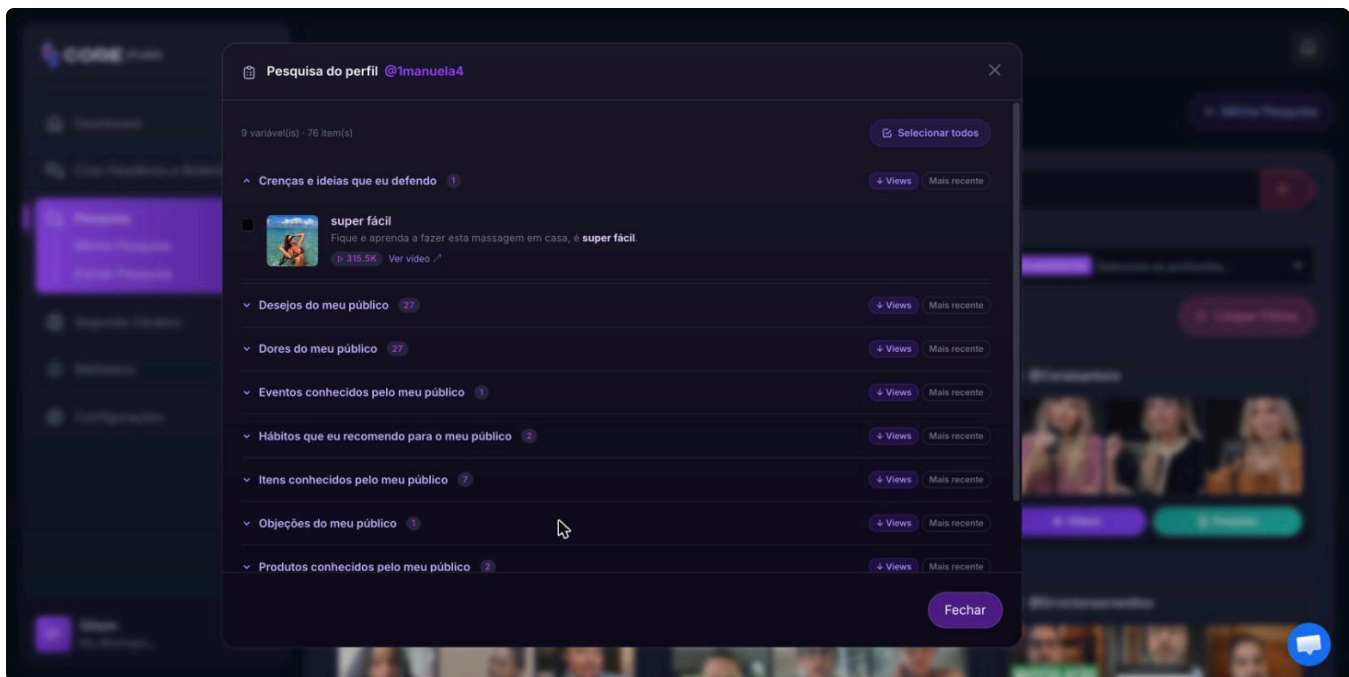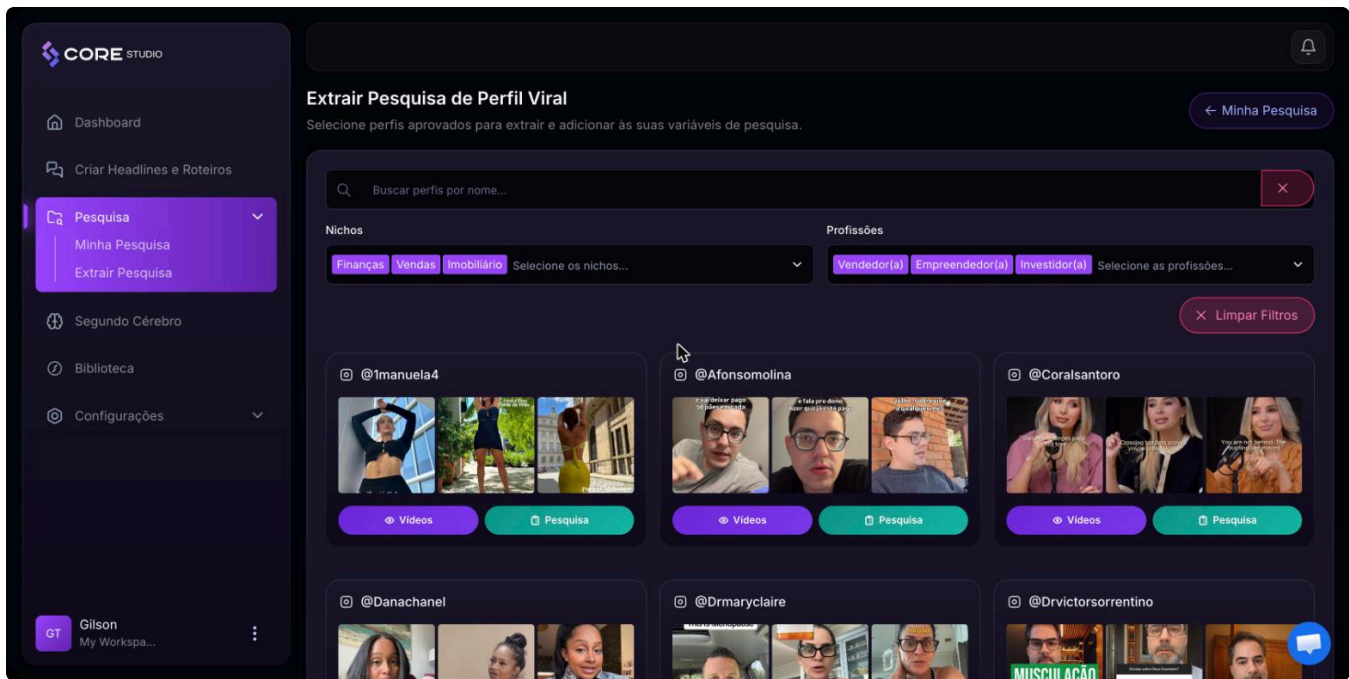

Variables have server slugs, for example `DESEJOS-TANGIVEIS-DO-AVATAR` (18), `CRENCAS-DO-ESPECIALISTA` (1), `PRODUTOS-CONHECIDOS-PELO-AVATAR` (34). The full id/label list is in the spec tab.

Inconsistency to decide on: the AI classifier prompt only knows **13 slugs**, and they don't match the 33 UI variables. It has no *Inimigos*, *Eventos* or *Locais*, and it has *Mecanismo único*, *Promessa principal* and *Prova social*, which have no UI variable. Our rebuild should use one variable list everywhere.

Segundo Cérebro (/dashboard/user/cores)

A **brain** is one markdown document about the creator (story, method, positioning, beliefs). The roteiro agent and the chat's @Cérebro read it as context. Brains are filled in three ways: an **AI-validated questionnaire**, **file upload**, or **YouTube transcription**. Uploads and transcripts are appended below the existing text.

List page. Title `Cérebros Personalizados / Segundo cérebro`, a `+ Criar Cérebro` button, and a tutorial banner (Bunny video). Below are cards, 3 per row: a `Vazio` (grey) or `Pronto` (blue) badge, the name, and `Acessar Cérebro`. The owner has 7: História de Criação, Histórias de Vida do Especialista and Método do Especialista (Vazio), plus Núcleo de Influência, Call de diagnóstico, Formulário and Narrativa (Pronto). Create asks only `Nome do Cérebro:` (placeholder `Ex: Reels Instagram`). A hidden type select (`Personalizado / Crença`) exists, so every new brain is Personalizado.

Brain kind	Opens	Fill methods	Rename / delete
<i>Sistema</i> , not answered yet	questionnaire <code>/cores/questions/{id}</code>	answer questions	no
<i>Sistema</i> , answered (e.g. Núcleo de Influência)	content editor <code>/cores/edit/{id}</code>	<code>Responder perguntas</code> · <code>Enviar arquivo</code> · <code>Transcrever do YouTube</code> · edit text	no
<i>Personalizado</i> (user-made)	content editor	<code>Enviar arquivo</code> · <code>Transcrever do YouTube</code> · edit text	 rename ·  delete

The questionnaire, and how the AI validates answers

1. Numbered question cards, each with a textarea (`Escreva sua resposta aqui`), a live `N caracteres` count, a status chip `Aguardando resposta` , and a top bar `Progresso das respostas · 0 de 9` .
2. **Questions unlock in groups of 3**. The next group fades in when every answer in the current group is filled. If more than 3 answers already exist on load, all show at once.
3. Footer: `Zerar Tudo` (confirm, then clear) · `Salvar Rascunho` (saves without validating) · `Finalizar Respostas` .
4. **Finalizar** sends the answers for **AI validation**; every chip turns `Validando...` . The verdict arrives by websocket (a private channel per user) with a 3s status poll as backup.
5. Each answer comes back `Aprovada` or `Rejeitada + Motivo da rejeição: ...` . Any rejection: `Algumas respostas foram rejeitadas. Corrija-as e tente novamente.`
6. All approved: `Gerando cérebro...` → `Sincronizando seu cérebro...` → `Cérebro sincronizado!` → back to the list, now `Pronto` . The AI turns the answers into the brain document; `Núcleo de Influência` became a "Perfil Profissional" (nome, profissão, experiência, missão, especialidades...).

System questionnaires, verbatim:

- **História de Criação (9)**: Como era sua vida antes de trabalhar com o que você trabalha hoje? · O que te motivou a iniciar nessa área? · Qual ou quais foram os maiores desafios que você enfrentou nesse caminho? · Teve um momento em que você pensou em desistir? O que te fez continuar? · Qual foi o ponto de virada que fez tudo mudar? · Quem você se tornou hoje? · O que você aprendeu com tudo isso e quer passar para outras pessoas? Qual é sua missão nessa área? · O que te motiva a continuar todos os dias? · Qual legado você quer deixar por meio do seu trabalho?
- **Histórias de Vida do Especialista (4)**: Agora precisamos das histórias que te forjaram na sua jornada. · Agora, conte histórias de grandes descobertas ou ensinamentos que você teve ao longo da sua jornada. · Conte histórias de pessoas que você ajudou. · Agora para finalizar, conte histórias de grandes conquistas que você teve na vida.
- **Método do Especialista (7)**: Qual é o passo a passo que você ensina para a pessoa sair do ponto A até o resultado? · Quais são os 3 a 5 pilares que toda pessoa precisa entender ou aplicar pra ter resultado com o que você ensina? · Se alguém seguisse só o essencial do que você faz, o que não poderia faltar? · Existe uma ordem certa ou fases que a pessoa precisa seguir? Quais são elas? · Você tem nomes para cada etapa ou


princípio do seu método? Quer criar? · Se você pudesse resumir seu método em uma frase ou nome forte, como ele se chamaria? · Tem alguma parte do processo que as pessoas costumam pular e depois se arrependem? Qual é?



- **Núcleo de Influência:** a system brain the owner already answered; its questions weren't re-read.

Content editor

It shows a back arrow, the title (with its Sistema badge if any) and **Alimente este cérebro com o seu conhecimento – quanto mais rico, melhores os resultados da IA.** Below are the source buttons, then **Conteúdo do cérebro** with a character count: one large markdown textarea holding the synthesized brain, and **Aplicar Alterações**.

- **Enviar arquivo** opens *Importar arquivo para o cérebro:* drag-and-drop of PDF, DOCX, TXT, MD or CSV up to 20 MB, **0 conteúdo será adicionado abaixo do texto já existente no cérebro.**
- **Transcrever do YouTube** opens *Transcrever vídeos do YouTube:* one or more links (**+ adicionar outro link**), then **Transcrever e anexar**. A background job downloads the audio, transcribes it and appends the text; the page polls the job until **done**.
- **Narrativa** shows what a synthesized brain looks like: **### MOVIMENTO IDENTIFICADO**, **### BIO**, **### APRESENTAÇÃO MAGNÉTICA** ..., the same beat names the roteiros use.
- Their script also contains **voice answers per question** (mic recording uploaded in 1 MB chunks), but no mic button shows on either editor today, so it looks retired.

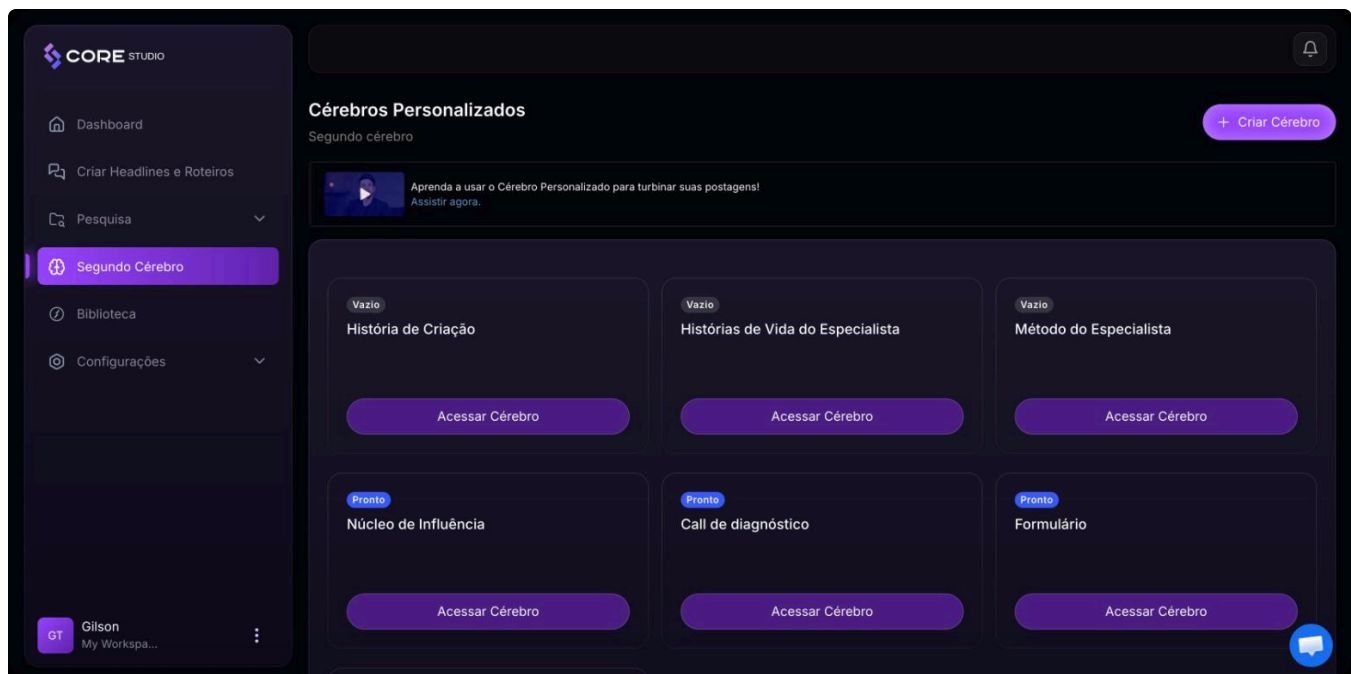

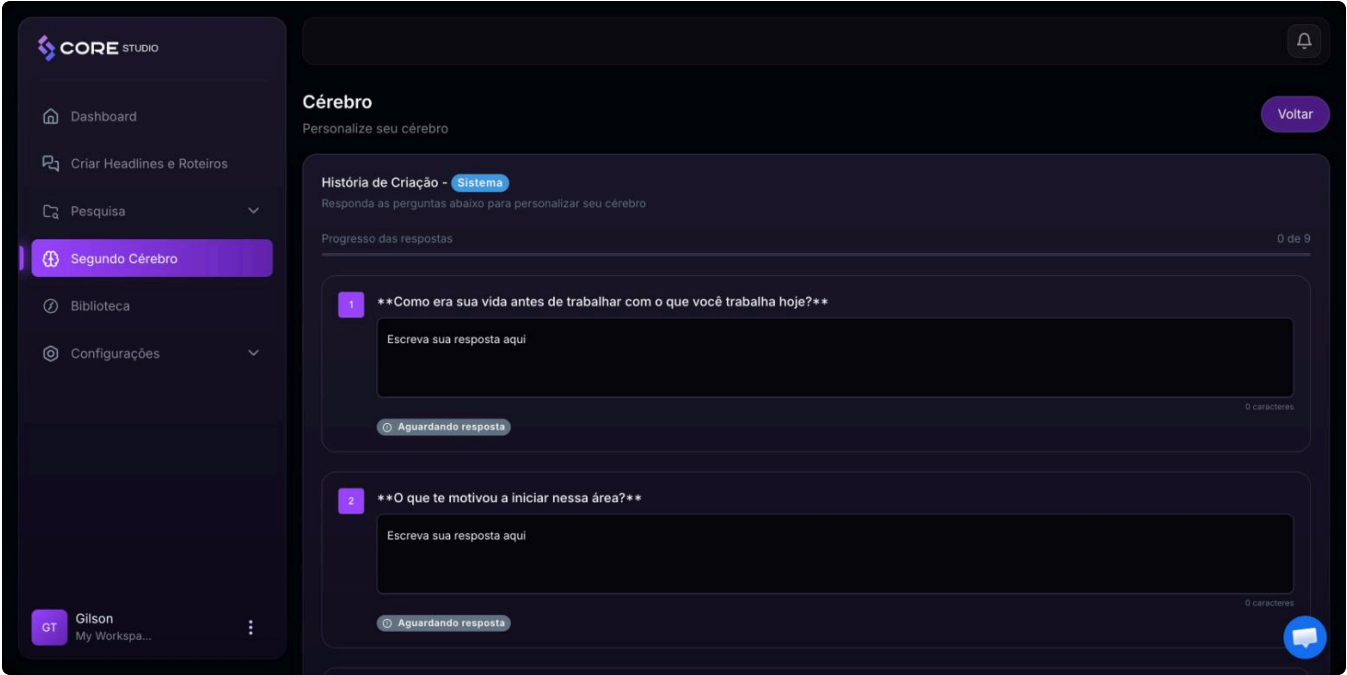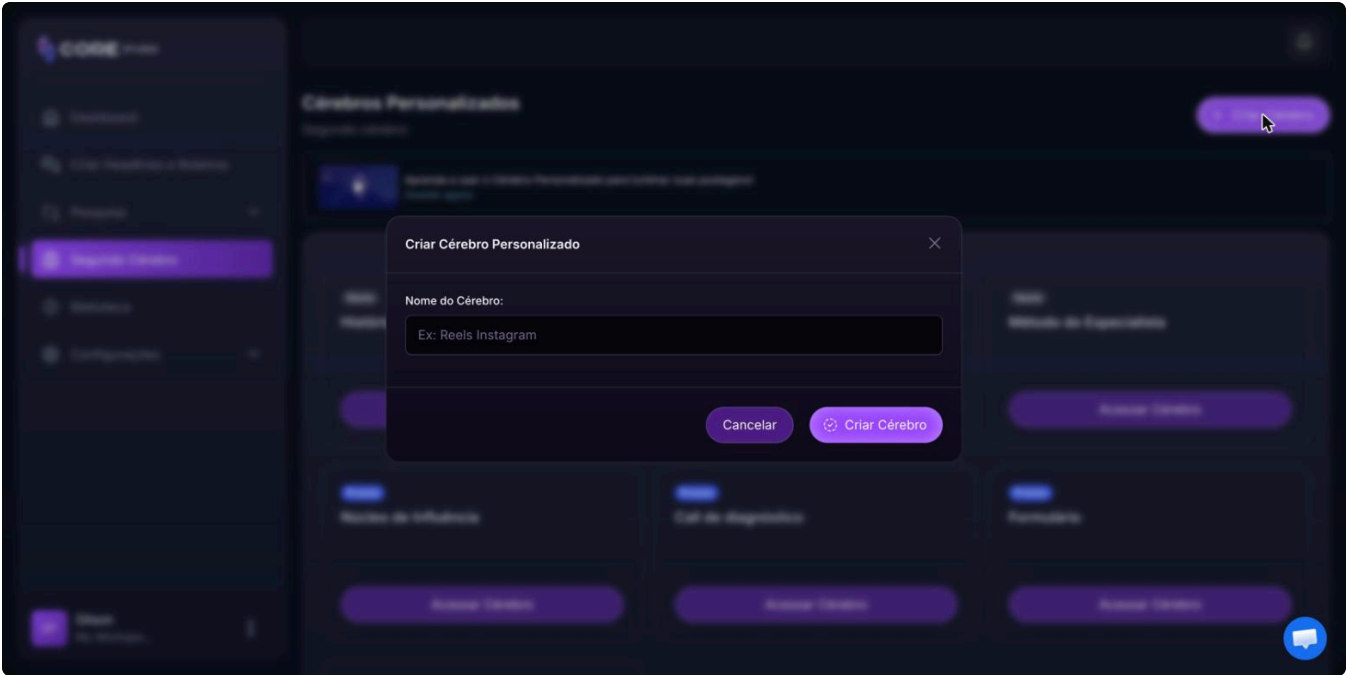

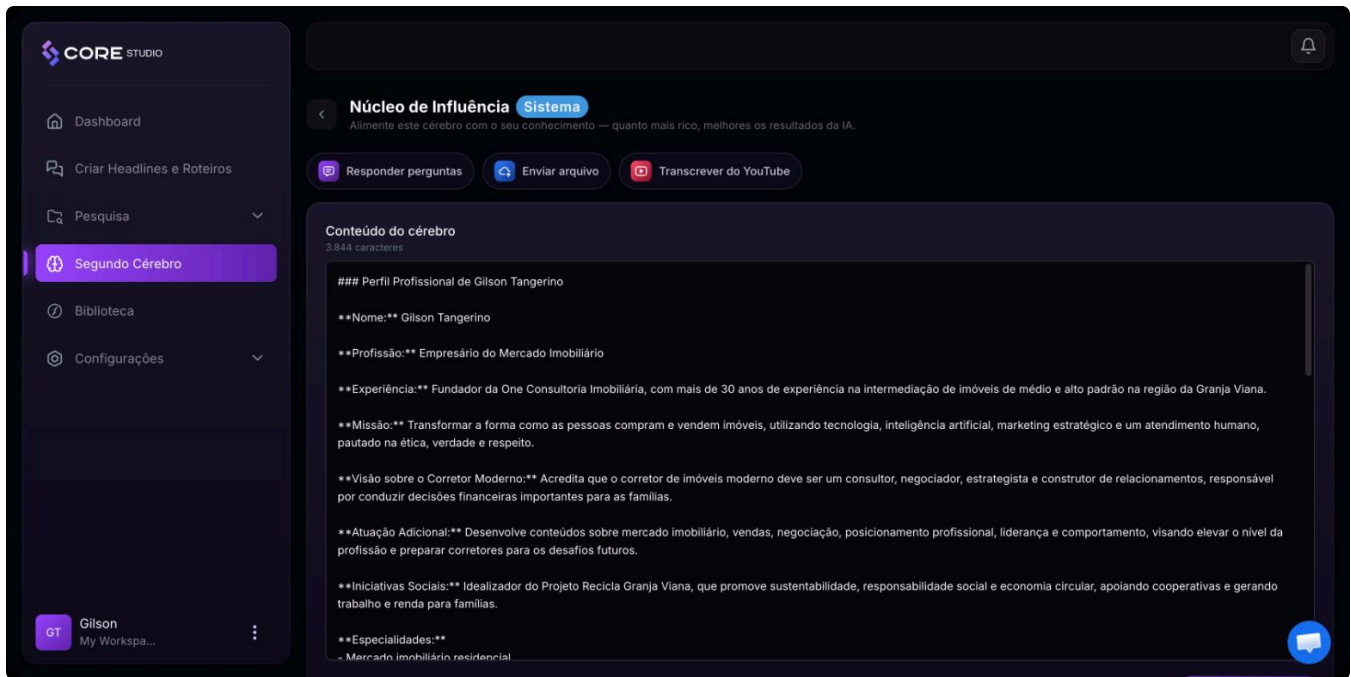


Image — Content editor, custom brain: rename + delete, no questionnaire

Hidden page: Minhas extrações (/dashboard/user/cores/extract)

Not in the menu. It is a table (ID · Data · Nome · Status) of "extractions" plus a Nova Extração modal: Nome , Extrair para: (multi-select of brains, with Clique aqui para criar um novo núcleo), Url: or a pasted Transcrição , then Criar Transcrição . It appears to be the older way of feeding brains from a link. The owner has 0 rows ("filtrado de 192 registros no total").

Image — Hidden Minhas extrações page

Image — Nova Extração modal


Gap users hit: one persona per account, and no way to keep separate brains per client or product line.

Architecture & API contract

CoreStudio is a **Laravel monolith on the MagicAI SaaS base** (LiquidThemes) with a large custom layer; Tabler/Bootstrap UI, jQuery + Alpine, Livewire 3 only for the chat.

Generation runs in server jobs and agent loops; the browser streams the chat over SSE and polls everything else.

Heavy work runs server-side; the browser streams chat, polls the rest

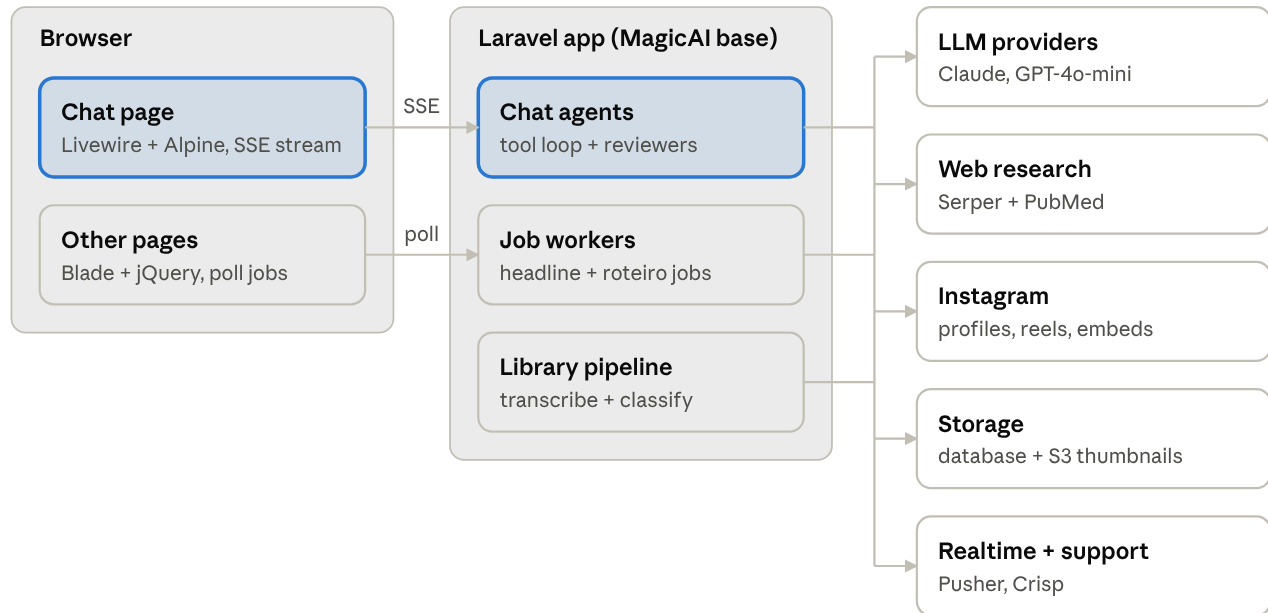

CoreStudio architecture · inferred from network + page code

Only the chat page talks continuously (SSE); every other generation is a job the page polls every 5–20 s behind a simulated progress bar.

Area	Endpoints (all under /dashboard/user)	Notes
Chat	POST chat/stream (SSE) · POST chat/documents (upload) · Livewire document-chat: startNewConversation, selectConversation, renameConversation, deleteConversation, loadMoreConversations, searchMentions, searchMyResearch, searchUserDocuments, attachReference, detachReference, loadMemories, addMemory, deleteMemory, copyScriptFast, forceCleanScript, loadToolDetail	SSE events: token, progress, rag_step, tool_start/end, refining_*, review_start/end/retry/warn, completed, error
Headlines	GET headlines/profiles · GET headlines/status/{id} (in_gpt2→completed error) · POST headlines/{favorites suggested}/list (DataTables) · .../update · .../delete(-multiple) · GET headlines/suggested/view/{id} (two-pass payloads) · POST headlines/suggested/store (from viral)	variables encoded id SLUG
Roteiros	POST roadmaps/list · GET roadmaps/view/{id} (roadmap_gpt, params, search_text, roadmap_liked) · .../advanced-roadmap/{store,show/{id},list-search,direct-search,translate-search-query,translate-search-results} · roadmaps/check-status/{id} · roadmaps/reversa/{store,show}	Poll 5 s, ≤ 120 polls
Library	GET library?...filters (server-rendered) · GET library/result/{id} (JSON) · GET library/workspaces · POST library/viral-topics · POST library-references/self-assign	24 per page

Area	Endpoints (all under /dashboard/user)	Notes
Pesquisa	GET searches/profile-viral-search/{profileId} · add/approve/reject/delete item endpoints (see scratch analysis)	AI classification sync 90 s → job
Cérebro	GET cores/edit/{id} · POST cores/youtube/extract + GET cores/youtube/status	Voice answers chunked 1 MB
Shell	GET notifications (30 s) · POST notifications/{id}/read, read-all · POST workspace/switch · POST first-access-seen · GET twin/api/credits	HTTP 419 → reload

Third parties seen: Pusher (key in page, legacy chat widget), Crisp support, Bunny Stream (training videos), S3 (corestudio-ai bucket, thumbnails), Instagram embeds, Serper web search, PubMed; LLMs: Claude (ai_provider: claude default for roteiros), GPT-4o-mini (query translation, per code comment).

Inferred data model

About 20 entities, reconstructed from JSON responses and form payloads; names are CoreStudio's where seen, column types are not visible. Scope is **Customer → Workspace → User**, and most creative data hangs off the workspace.

Entity	Key fields (observed)	Relations
Customer / Workspace	id, name	Customer 1→N Workspace; user switches workspace
UserProfile	bio, apresentação magnética, CTAs, IG/TikTok handles, niches (≤ 3), professions (≤ 3)	1→1 user
ViralResult (eng_reversa_result)	profile, social, thumbnail, plays, likes, comments, post_date, post_link_public, transcription_text, headline, is_core	N:M Niche, Profession, FormatVideo; belongs to ReferenceProfile (eng_reversa_search_id)
ReferenceProfile	id, profile (handle), is_structure, status pending/approved/rejected	1→N ViralResult
FormatVideo	id, name, definition, signals, alias, status (15)	N:M ViralResult (via a classification run eng_reversa_flow_result_id)
Niche (28) · Profession (102)	id, name, slug	N:M ViralResult, UserProfile

Entity	Key fields (observed)	Relations
Variable	id, slug, label, type: public me (17 + 12 + power words)	1→N ResearchItem
ResearchItem	id, value, variable_id, group, status (user / pending / approved), plays, source result_id, source headline	user/workspace; source ViralResult
ViralTopic	id, topic, status	workspace; source ViralResult
StructureCategoryItem	id, group: 3 Estrutura 4 Gatilho 7 Tom, name	headline generation filters
Core (brain)	template id (8-4192) + per-user instance (85xx-93xx), type: sistema personalizado crença, status vazio/pronto, content (markdown)	1→N CoreQuestion / answers
UserMemory	id, content ≤ 500, created_at	user
ChatConversation	id (UUIDv7), title ≤ 100, agent_id, updated_at, attached_references[{id, source, title, meta}]	1→N ChatMessage
ChatMessage	id, role, content (markdown + {{action}} tokens + estrutura citations), is_roteiro, trace JSON	trace = prompts, rounds, tool calls, reviews, usage
ChatAgent	id, key: headline roteiro headline_express	—
RagDocument	id, title, meta, status (uploads)	user
HeadlineGeneration	inputs (who, variables, subject, profiles XOR formats, core, structure items, thermometer), status in_gpt2→completed error, two-pass payload/callback	1→N Headline
SuggestedHeadline (eng_reversa_headlines)	headline, mode automatic manual, result(views), likes, comments, eng_reversa_result_id, structure, roadmap, search_text	source ViralResult
FavoriteHeadline	headline, headline_id, structure, roadmap, eng_reversa_result_id	—
Roadmap (roteiro)	id, name, headline, observations, brain_id, viral_id, params{source_type, links, serper_query, pubmed, duration, ai_provider, mode}, roadmap_gpt, search_text, status (Criando/Processando/Completo/Falha), roadmap_liked	from Favorite/Suggested/Headline
ActivityLog · Notification	actor, action, type, created_at · title, body, link, icon, type, status	user
Twin (avatar video)	CloneProfile {id, name, thumbnail_url}, CreditWallet {balance}, CreditPackage {credits, price_cents}	user

Mapping to NoctusAI

We already own the methodology (*Método Audience* in `prompts/methodology.py`), a post pipeline, brand kits and transcription; what CoreStudio adds is the **viral structure library, the research base, brains/memory and the agentic chat**. Today social-wiring has one flat "Criação de mídia" link (`App.tsx:150`) with in-page tabs Biblioteca · Novo post · Kits de marca.

Decided sidebar (interview, 2026-10-05): a new **Criação de Mídia** group below Edição de Fotos holds CoreStudio's tree exactly, which makes the seed sidebar **4 levels** deep. Each link is still its own `status_pagina` row.

Criação de Mídia ▾	(level 1, our group)
Dashboard	(level 2)
Criar Headlines e Roteiros	
Pesquisa ▾	
Minha Pesquisa	(level 3)
Extrair Pesquisa	
Segundo Cérebro	
Biblioteca	
Configurações ▾	
Minha conta	
Minha Biblioteca	
Treinamentos	
Headlines ▾	
Gerar Headlines	(level 4)
Headlines Favoritas	
Headlines sugeridas	
Roteiros	

Decision	Answer
Placement	Nested under Criação de Mídia; seed sidebar supports 4 levels
Open / close	Accordion (one group open per level), and the open group can be closed by clicking it
Active state	CoreStudio's highlight on the top item plus a mark on the current leaf link
Where it lives	A seed <code>Sidebar</code> change (approved)

Decision	Answer
Rollout	Every active product gets it: academia-de-reciclagem, agents, community, core, igig, orbity, p-studio, social-wiring, store. The 7 asleep products are untouched. What "gets it" means is still open (below)

What we reuse vs build

CoreStudio piece	We have	Gap
Method taxonomies (gatilhos, estruturas, CTAs)	<code>METODO_AUDIENCE</code> (7 triggers, 32 templates, skeleton)	merge with CoreStudio's 13-beat vocabulary + 15 formats + 6 tones
Chat UI + streaming	seed <code>ChatWindow</code> , <code>chat_completion_stream</code> , help-chat SSE pattern	@-reference picker, inline chips, step panel, trace drawer
Conversations store	agents product <code>stores/conversations.py</code>	per-agent lists, attached references
Brains / knowledge	agents <code>personas.py</code> + <code>knowledge_editorial</code> , knowledge-extractor <code>kb_chunk</code> + <code>match_kb</code>	questionnaires, voice answers, YouTube transcription → brain
Transcription	<code>integrations/llm/audio.py</code> (Whisper), knowledge-extractor pipeline	reel download + batch transcribe
Brand persona	<code>mc_brand_kits</code> (persona, design system)	Apresentação magnética + CTAs slots; per-conversation persona
Tables / CRUD	seed <code>ResourceManager</code>	—
Viral library + classifier	—	scraper, transcripts, 15-format multi-label classifier, niches/professions

CoreStudio piece	We have	Gap
Research base	—	33 variables, extraction from transcripts, approve flow
Web research	Claude runtime WebSearch only	seed-level search integration (Serper/PubMed equivalent)
Memory	—	small per-user store + save/forget tools

Improvements over CoreStudio (from the evidence): a hard word cap counted in code; a reviewer that blocks unsourced numbers; explicit *Modelagem estrutural* vs *Paráfrase fiel* mode; persona selectable per conversation; cite or drop the research dossier.

Open questions (the interview continues; nothing is assumed):

- ☒ ~~Nesting: decided — nested, 4 levels, seed change (see the decisions table above)~~
- ☐ Rollout to the other active products: only the new behaviour (closable accordion + leaf mark) with menus unchanged, or also regroup their menus into nested groups?
- ☐ Do the existing social-wiring tabs (Biblioteca de posts · Novo post · Kits de marca) stay, and where in the new tree?
- ☐ Visual style of the tree: CoreStudio's look (purple gradient, rule lines) or our design-system tokens?
- ☐ Pesquisa: one variable list for both the UI and the AI classifier — CoreStudio's 33, the classifier's 13, or a merged list?
- ☐ Pesquisa: rebuild the hidden Assuntos Virais pane, or leave it out?
- ☐ Segundo Cérebro: keep AI validation of questionnaire answers? Bring back voice answers? Keep the hidden *Minhas extrações* page?
- ☐ Viral library source: scrape our own corpus, or start from the user's references only? (Biblioteca discussion deferred.)
- ☐ Approve actions in CoreStudio that change the account (spec tab §7), including one live generation (1 credit) to read the real HEADLINE / ROTEIRO prompts?