GENERALITAT VALENCIANA

ceedcv CENTRE ESPECÍFIC D'EDUCACIÓ A DISTÀNCIA DE LA COMUNITAT VALENCIANA

CICLO FORMATIVO DE GRADO SUPERIOR

Administración de Sistemas Informáticos en Red (ASIR)

Implantación de Aplicaciones Web

UD1 - PRÁCTICA 1.1 INSTALAR GIT (no evaluable)

AUTOR

Juan Ramón Briones Cotaina

CURSO

2026 / 2027

FECHA DE ENTREGA

[19/09/2026]


Índice

1 Introducción 2
2 Instalación 2
3 Conclusiones 9


1 Introducción


El objetivo de esta práctica no evaluable es instalar GIT en un sistema Windows que es con el que trabajare.

2 Instalación

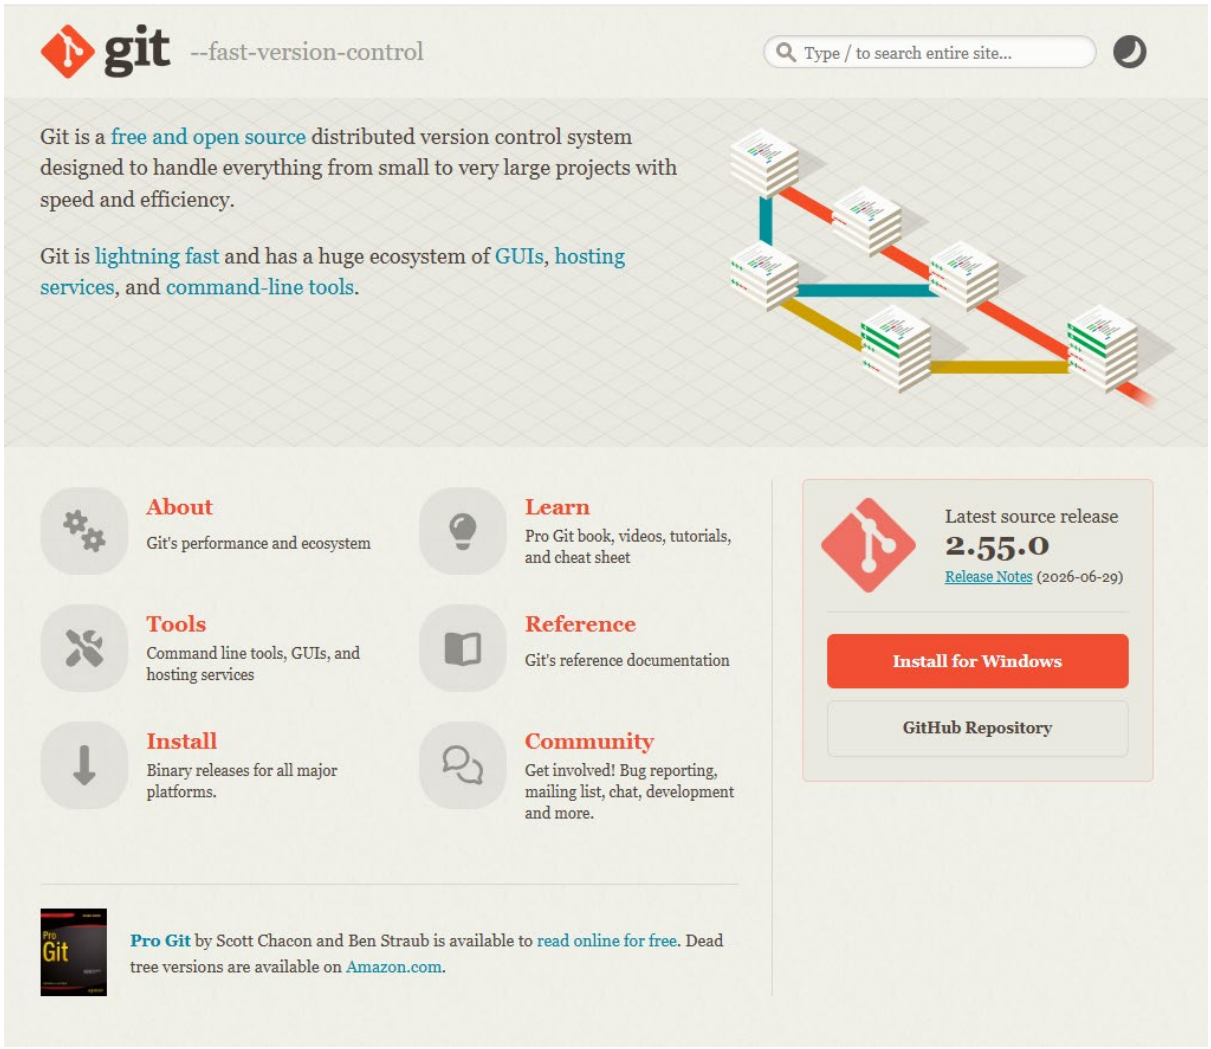


Descarga

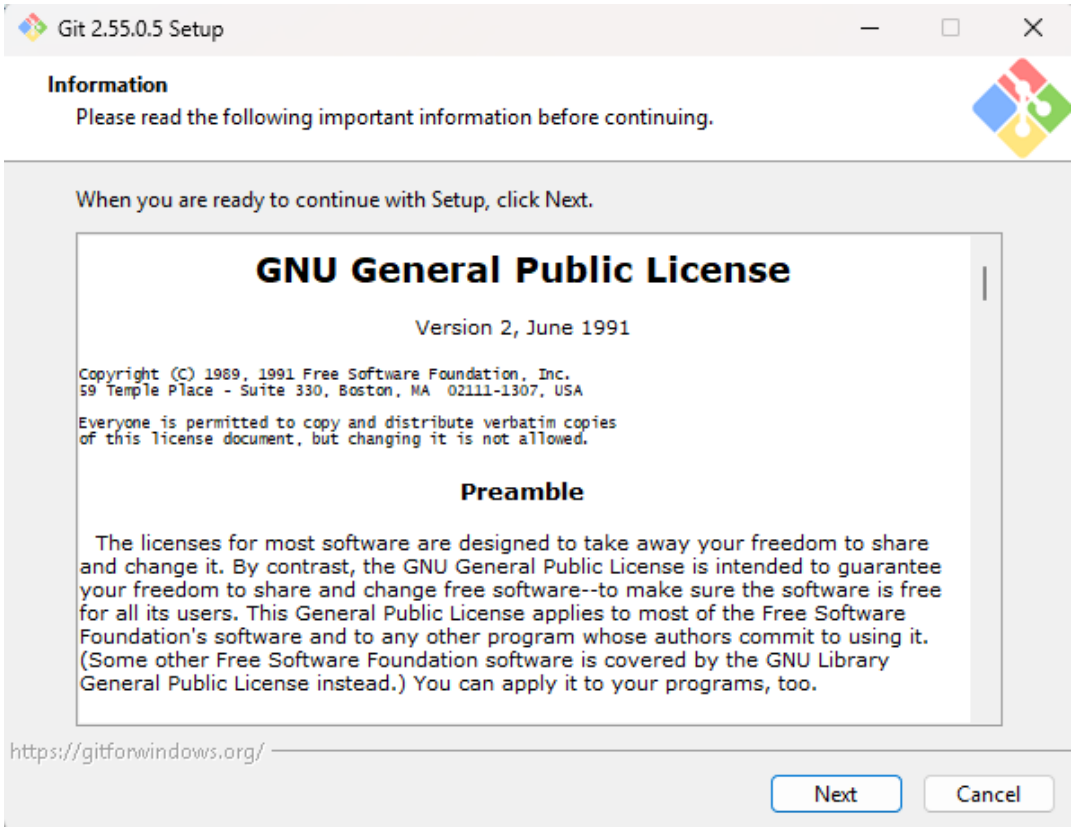


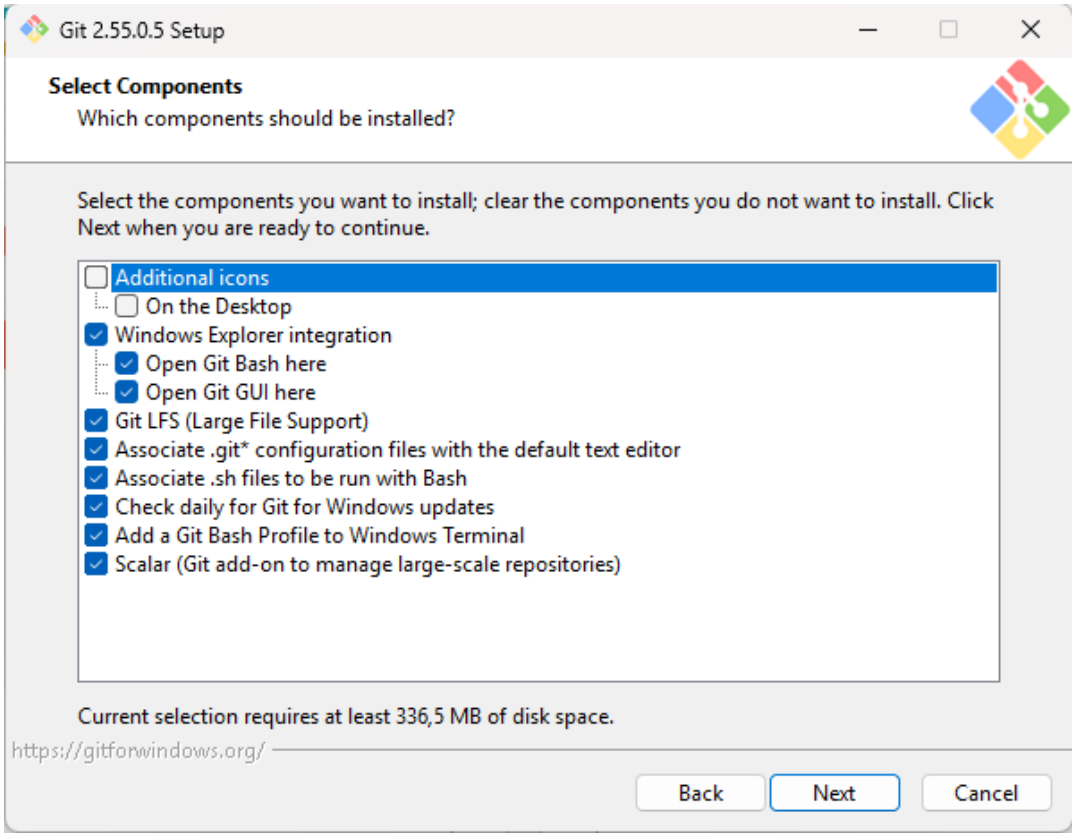



A parte de las opciones por defecto marco que compruebe actualizaciones y añada el perfil de Git Bash al terminal de Windows porque puede que lo use.

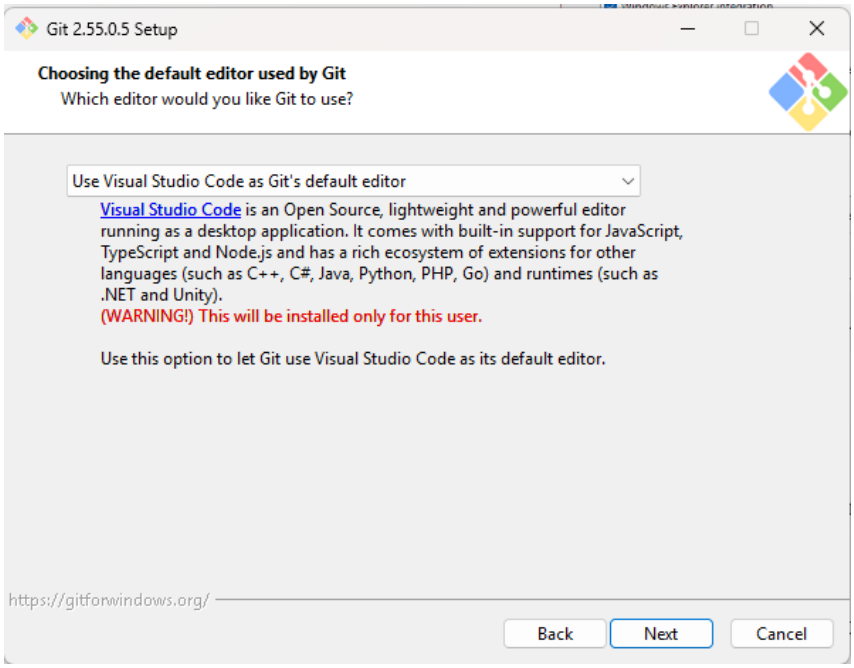



He visto que uno de los videos utiliza Visual Studio Code y me ha gustado el estilo del editor, marco ese editor porque es el que creo que utilizaré.

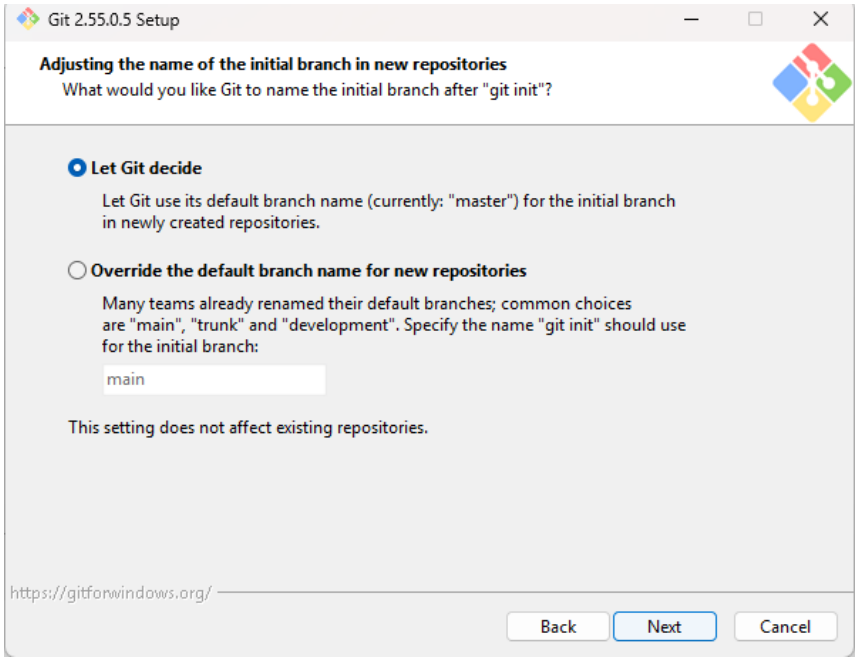


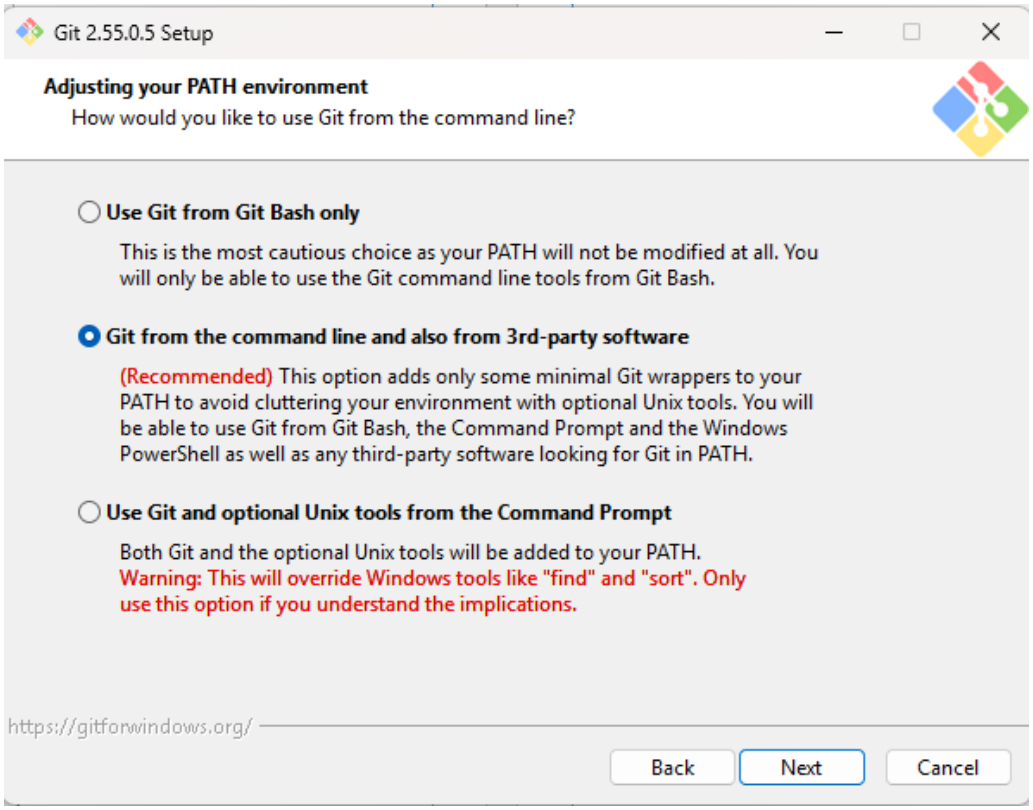

Git 2.55.0.5 Setup
Adjusting your PATH environment
How would you like to use Git from the command line?
Use Git from Git Bash only
This is the most cautious choice as your PATH will not be modified at all. You will only be able to use the Git command line tools from Git Bash.
Git from the command line and also from 3rd-party software
(Recommended) This option adds only some minimal Git wrappers to your PATH to avoid cluttering your environment with optional Unix tools. You will be able to use Git from Git Bash, the Command Prompt and the Windows PowerShell as well as any third-party software looking for Git in PATH.
Use Git and optional Unix tools from the Command Prompt
Both Git and the optional Unix tools will be added to your PATH.
Warning: This will override Windows tools like "find" and "sort". Only use this option if you understand the implications.
https://gitforwindows.org/
Back
Next
Cancel

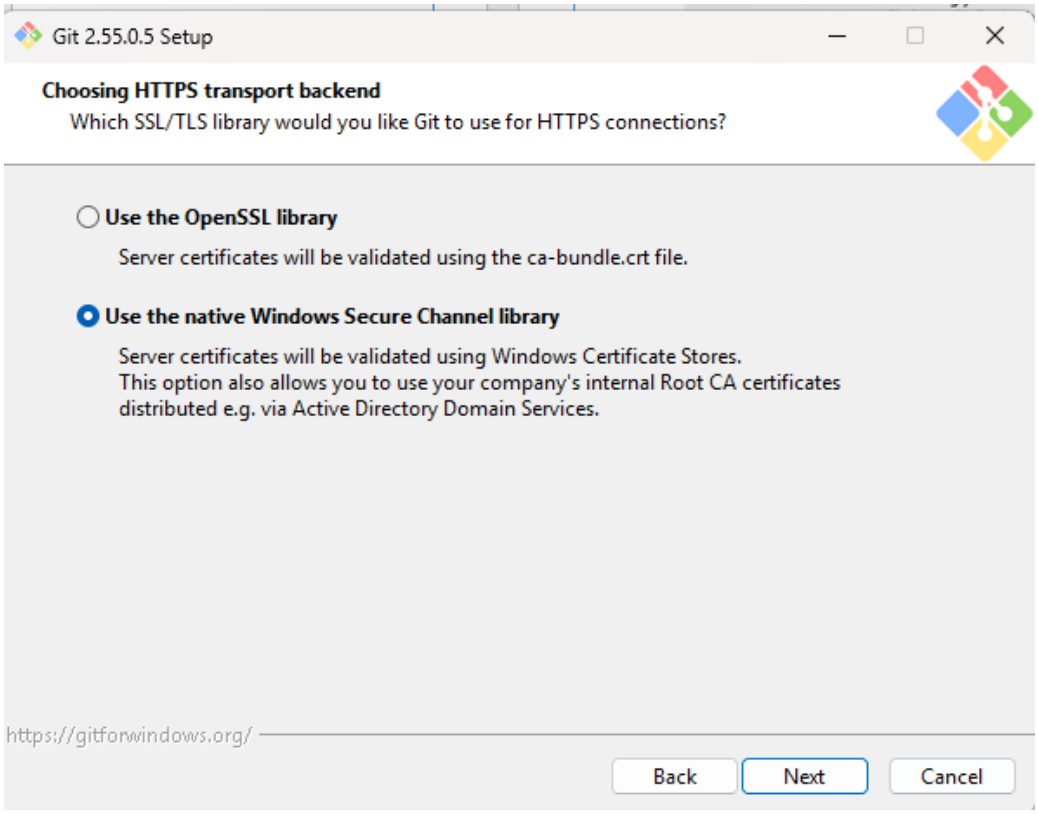

Git 2.55.0.5 Setup
Choosing HTTPS transport backend
Which SSL/TLS library would you like Git to use for HTTPS connections?
Use the OpenSSL library
Server certificates will be validated using the ca-bundle.crt file.
Use the native Windows Secure Channel library
Server certificates will be validated using Windows Certificate Stores.
This option also allows you to use your company's internal Root CA certificates distributed e.g. via Active Directory Domain Services.
https://gitforwindows.org/
Back
Next
Cancel

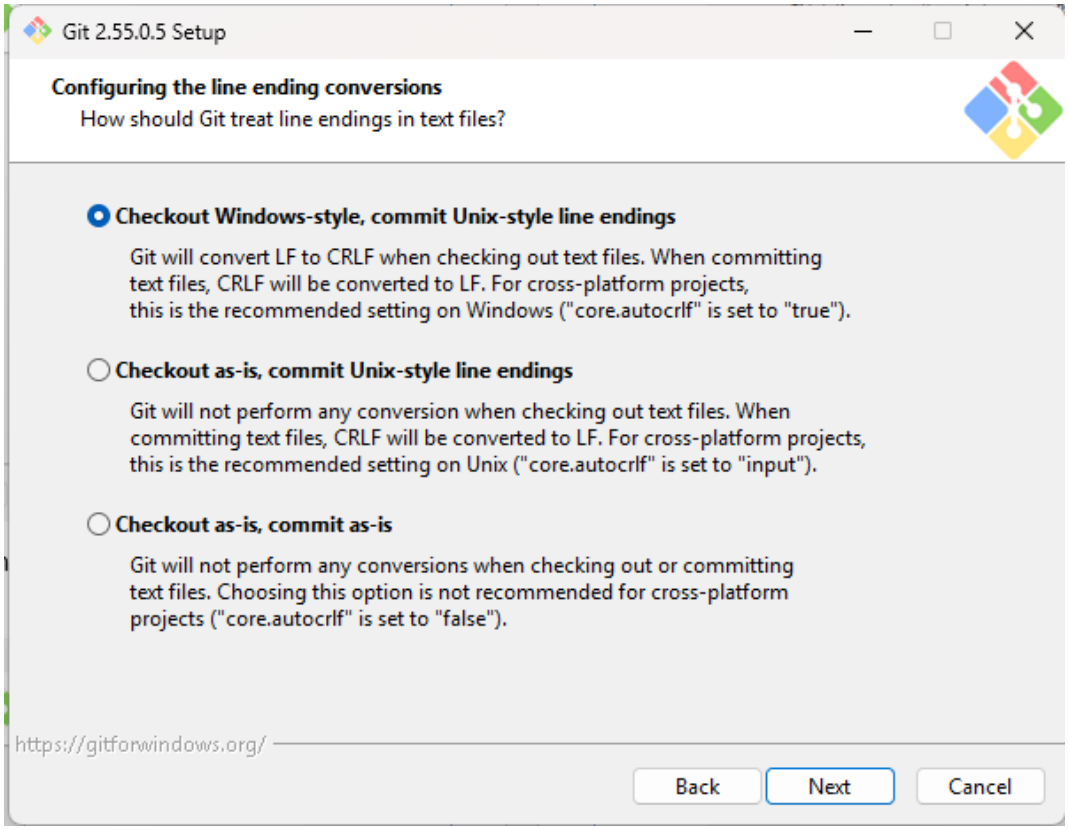
Git 2.55.0.5 Setup
Configuring the line ending conversions
How should Git treat line endings in text files?
Checkout Windows-style, commit Unix-style line endings
Git will convert LF to CRLF when checking out text files. When committing text files, CRLF will be converted to LF. For cross-platform projects, this is the recommended setting on Windows ("core.autocrlf" is set to "true").
Checkout as-is, commit Unix-style line endings
Git will not perform any conversion when checking out text files. When committing text files, CRLF will be converted to LF. For cross-platform projects, this is the recommended setting on Unix ("core.autocrlf" is set to "input").
Checkout as-is, commit as-is
Git will not perform any conversions when checking out or committing text files. Choosing this option is not recommended for cross-platform projects ("core.autocrlf" is set to "false").
https://gitforwindows.org/
Back
Next
Cancel

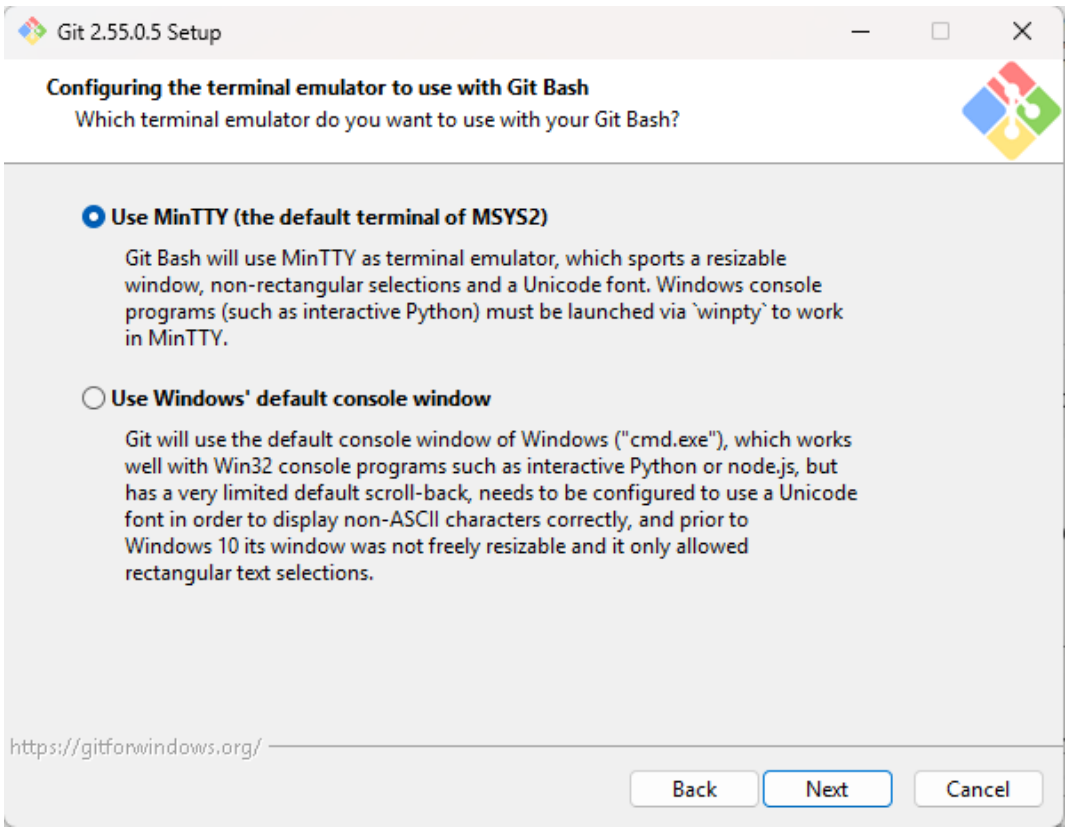

Git 2.55.0.5 Setup
Configuring the terminal emulator to use with Git Bash
Which terminal emulator do you want to use with your Git Bash?
Use MinTTY (the default terminal of MSYS2)
Git Bash will use MinTTY as terminal emulator, which sports a resizable window, non-rectangular selections and a Unicode font. Windows console programs (such as interactive Python) must be launched via `winpty` to work in MinTTY.
Use Windows' default console window
Git will use the default console window of Windows ("cmd.exe"), which works well with Win32 console programs such as interactive Python or node.js, but has a very limited default scroll-back, needs to be configured to use a Unicode font in order to display non-ASCII characters correctly, and prior to Windows 10 its window was not freely resizable and it only allowed rectangular text selections.
https://gitforwindows.org/
Back
Next
Cancel

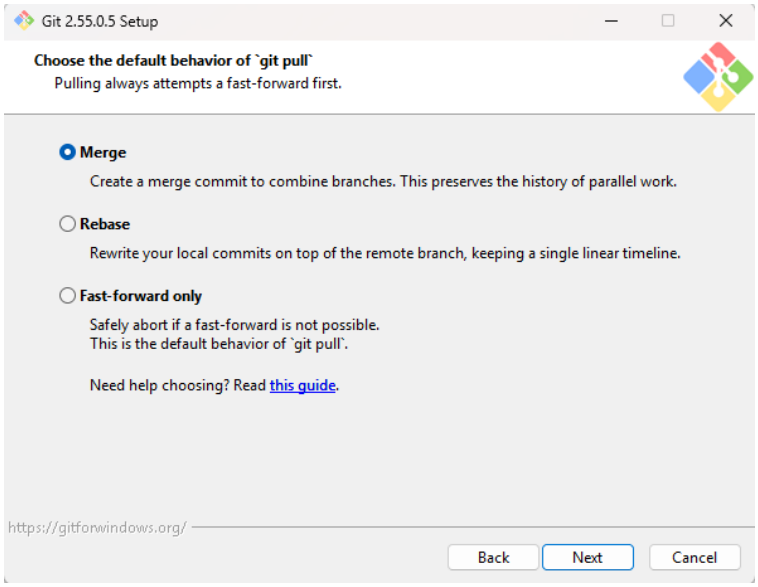
Git 2.55.0.5 Setup
Choose the default behavior of `git pull`
Pulling always attempts a fast-forward first.
Merge
Create a merge commit to combine branches. This preserves the history of parallel work.
Rebase
Rewrite your local commits on top of the remote branch, keeping a single linear timeline.
Fast-forward only
Safely abort if a fast-forward is not possible.
This is the default behavior of `git pull`.
Need help choosing? Read this guide.
https://gitforwindows.org/
Back
Next
Cancel

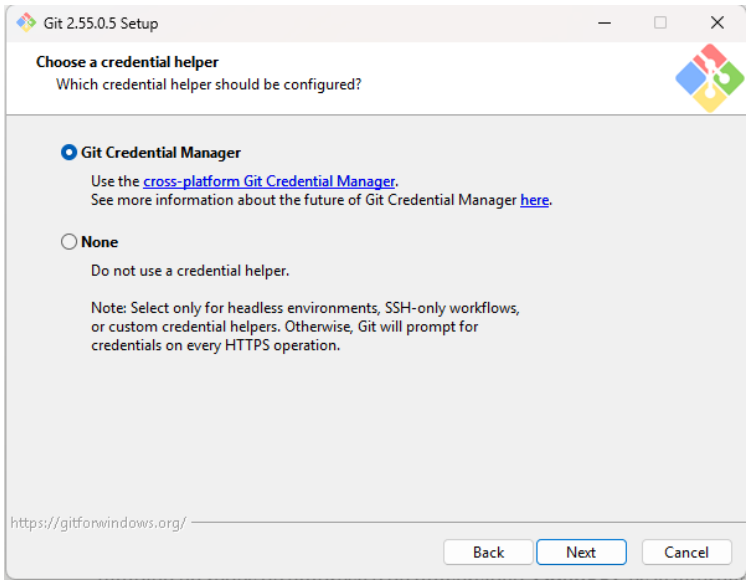

Git 2.55.0.5 Setup
Choose a credential helper
Which credential helper should be configured?
Git Credential Manager
Use the cross-platform Git Credential Manager.
See more information about the future of Git Credential Manager here.
None
Do not use a credential helper.
Note: Select only for headless environments, SSH-only workflows,
or custom credential helpers. Otherwise, Git will prompt for
credentials on every HTTPS operation.
https://gitforwindows.org/
Back
Next
Cancel

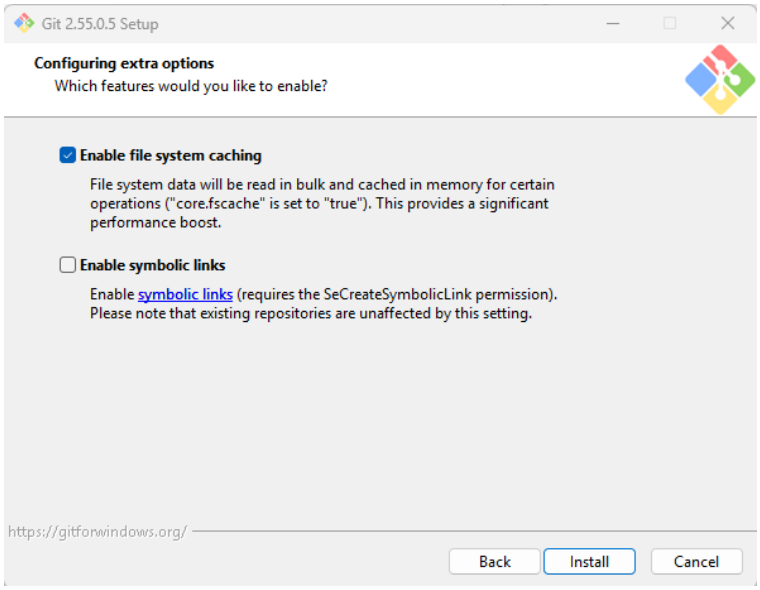
Git 2.55.0.5 Setup
Configuring extra options
Which features would you like to enable?
Enable file system caching
File system data will be read in bulk and cached in memory for certain
operations ("core.fscache" is set to "true"). This provides a significant
performance boost.
Enable symbolic links
Enable symbolic links (requires the SeCreateSymbolicLink permission).
Please note that existing repositories are unaffected by this setting.
https://gitforwindows.org/
Back
Install
Cancel


En las anteriores capturas dejo las opciones por defecto que mejor convienen para Windows.

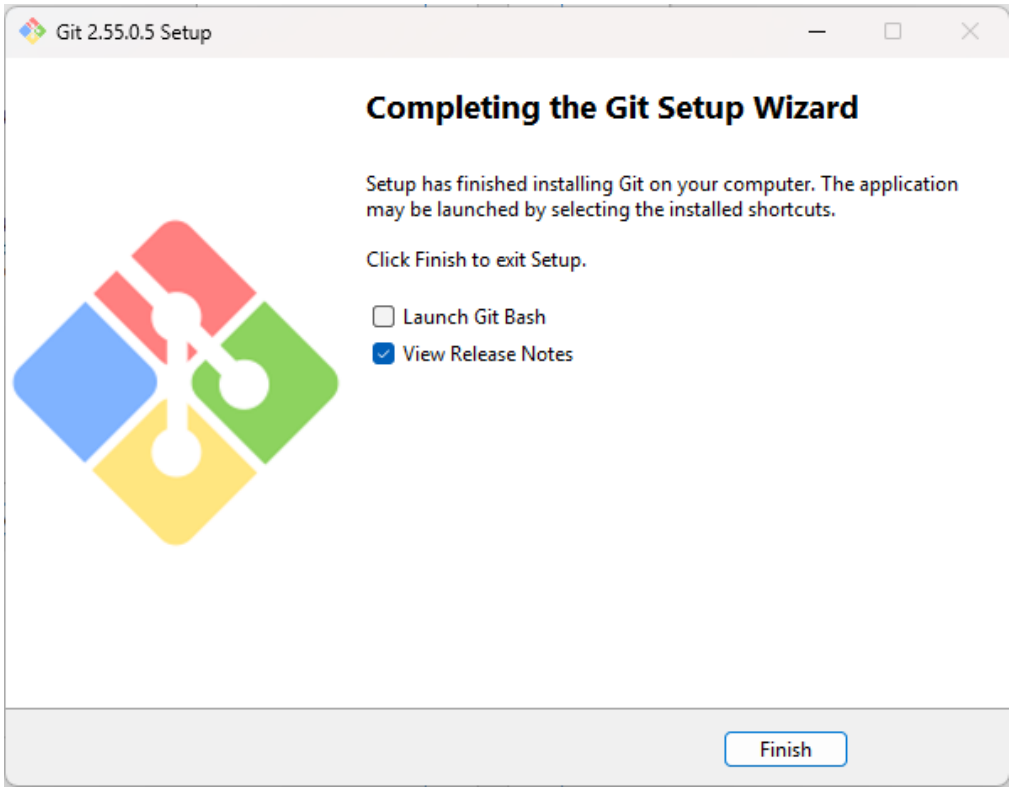

Final de la instalación.

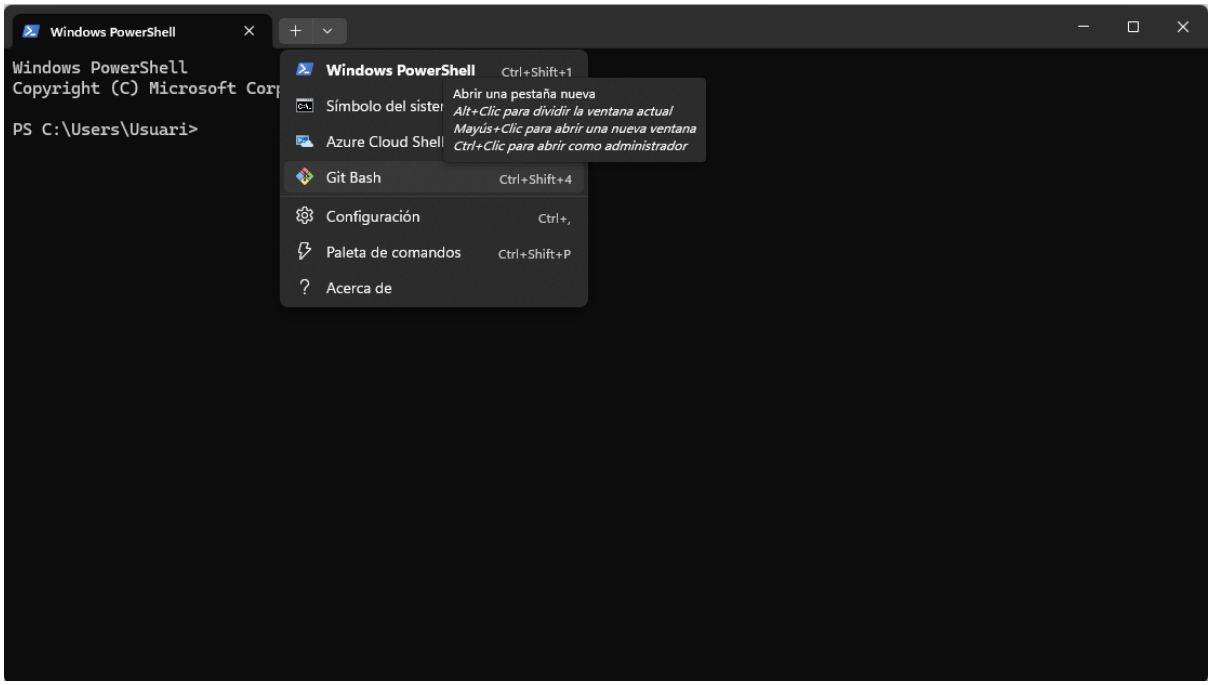

En esta captura veo como se añade para abrir un nuevo terminal de GIT, esa opción la habíamos marcado en la instalación.

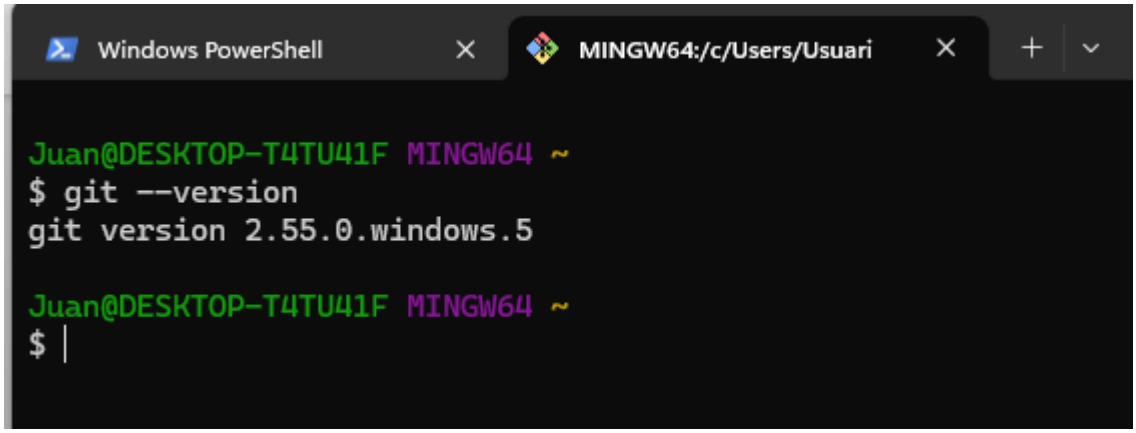

Comprobamos que está instalado.

3 Conclusiones

Pocas conclusiones de esta pequeña práctica, instalar GIT para Windows y dejando casi todo por defecto.