GENERALITAT VALENCIANA

ceedcv CENTRE ESPECÍFIC D'EDUCACIÓ A DISTÀNCIA DE LA COMUNITAT VALENCIANA

CICLO FORMATIVO DE GRADO SUPERIOR

Administración de Sistemas Informáticos en Red (ASIR)

Implantación de Aplicaciones Web

UD2 - PRÁCTICA 2.3 Instalar MySQL en Ubuntu.

AUTOR

Juan Ramón Briones Cotaina

CURSO

2026 / 2027

FECHA DE ENTREGA

[04/10/2026]

Índice


1 Introducción 2
2 Práctica 2
3 Conclusiones 5


1 Introducción

En esta práctica no evaluable instalaremos un sistema gestor de bases de datos, en este caso utilizaremos MySQL en Ubuntu Server.

2 Práctica

2.1 Instalación

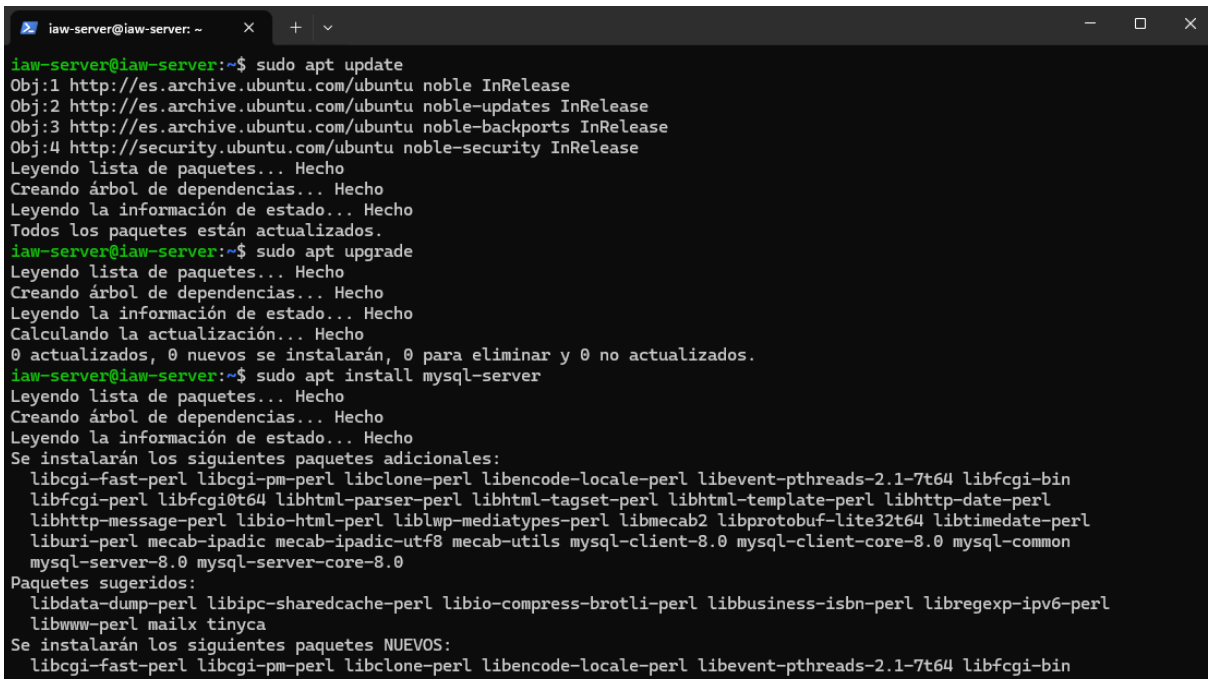

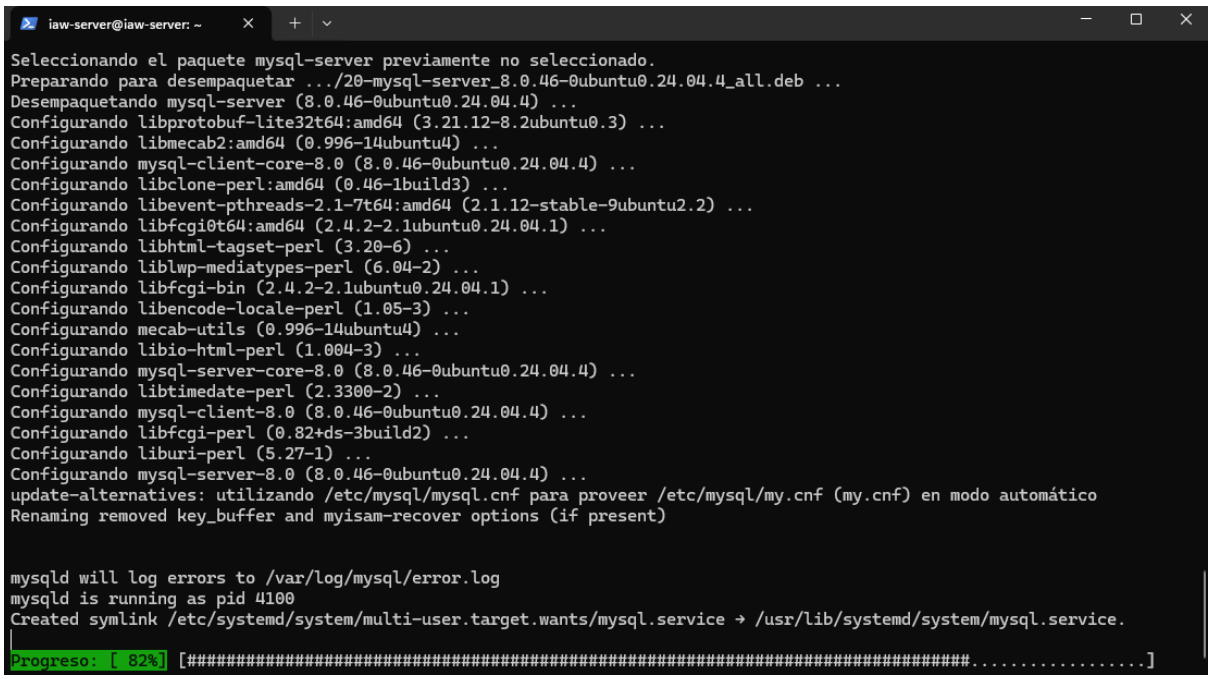

```
iaw-server@iaw-server:~$ sudo mysql_secure_installation

Securing the MySQL server deployment.

Connecting to MySQL using a blank password.

VALIDATE PASSWORD COMPONENT can be used to test passwords
and improve security. It checks the strength of password
and allows the users to set only those passwords which are
secure enough. Would you like to setup VALIDATE PASSWORD component?

Press y|Y for Yes, any other key for No: y
```

```
There are three levels of password validation policy:

LOW    Length >= 8
MEDIUM Length >= 8, numeric, mixed case, and special characters
STRONG Length >= 8, numeric, mixed case, special characters and dictionary                  file

Please enter 0 = LOW, 1 = MEDIUM and 2 = STRONG: 0

Skipping password set for root as authentication with auth_socket is used by default.
If you would like to use password authentication instead, this can be done with the "ALTER_USER" command.
See https://dev.mysql.com/doc/refman/8.0/en/alter-user.html#alter-user-password-management for more information.

By default, a MySQL installation has an anonymous user,
allowing anyone to log into MySQL without having to have
a user account created for them. This is intended only for
testing, and to make the installation go a bit smoother.
You should remove them before moving into a production
environment.

Remove anonymous users? (Press y|Y for Yes, any other key for No) : y
Success.


Normally, root should only be allowed to connect from
'localhost'. This ensures that someone cannot guess at
the root password from the network.

Disallow root login remotely? (Press y|Y for Yes, any other key for No) : y
Success.
```

```
By default, MySQL comes with a database named 'test' that
anyone can access. This is also intended only for testing,
and should be removed before moving into a production
environment.


Remove test database and access to it? (Press y|Y for Yes, any other key for No) : y
 - Dropping test database...
Success.

 - Removing privileges on test database...
Success.

Reloading the privilege tables will ensure that all changes
made so far will take effect immediately.

Reload privilege tables now? (Press y|Y for Yes, any other key for No) : y
Success.

All done!
iaw-server@iaw-server:~$
```

Actualizar el sistema:

```
sudo apt update sudo
apt upgrade
```

Instalar MySQL:


```
sudo apt install mysql-server
```


Asegurar la instalación:

```
sudo mysql_secure_installation
```

Después de instalar MySQL ejecuté sudo mysql_secure_installation, un asistente que sirve para dejar MySQL más seguro. Me fue preguntando varias cosas: primero si quería activar el componente de validación de contraseñas, que comprueba que las contraseñas sean seguras, y le dije que sí y elegí el nivel 0 (LOW), que solo pide un mínimo de 8 caracteres. La contraseña de root no me la pidió porque usa la autenticación auth_socket, es decir, entra con el usuario del sistema sin contraseña. Después me preguntó si quería eliminar los usuarios anónimos, que sirven para entrar sin tener cuenta, y dije que sí. También si quería desactivar el acceso remoto de root para que solo se pueda conectar desde el propio servidor, y dije que sí. Luego si quería eliminar la base de datos de prueba llamada test, que viene por defecto y a la que puede acceder cualquiera, y también dije que sí. Por último, me preguntó si quería recargar las tablas de privilegios para que los cambios se apliquen al momento, y dije que sí.

2.2 Acceso consola y pruebas

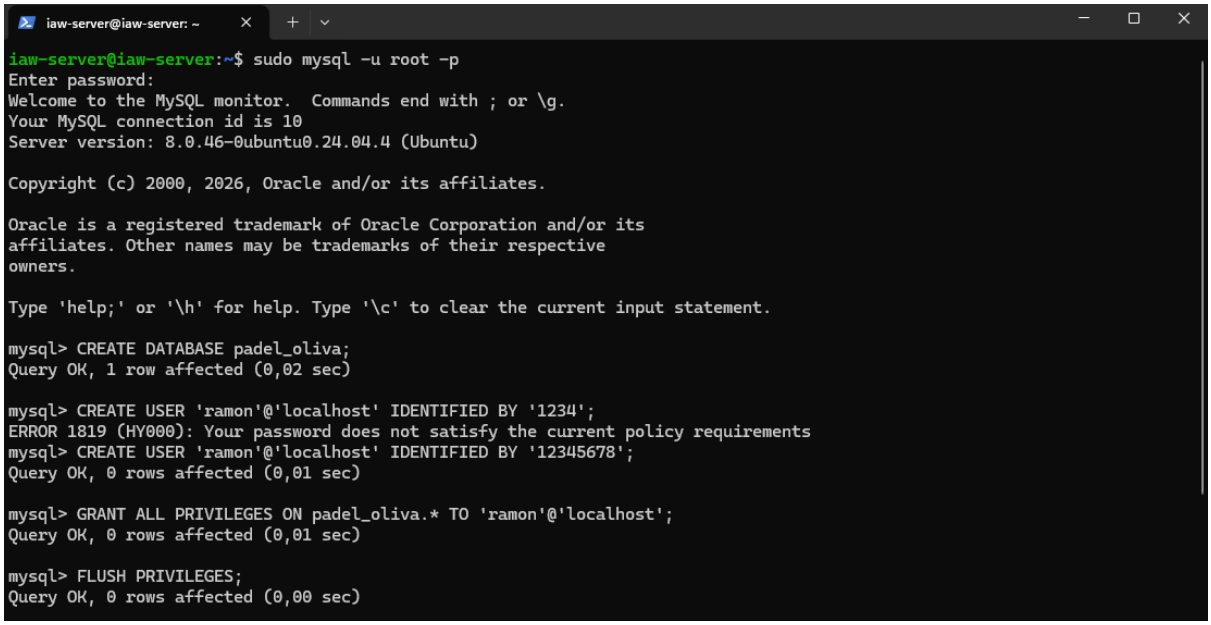

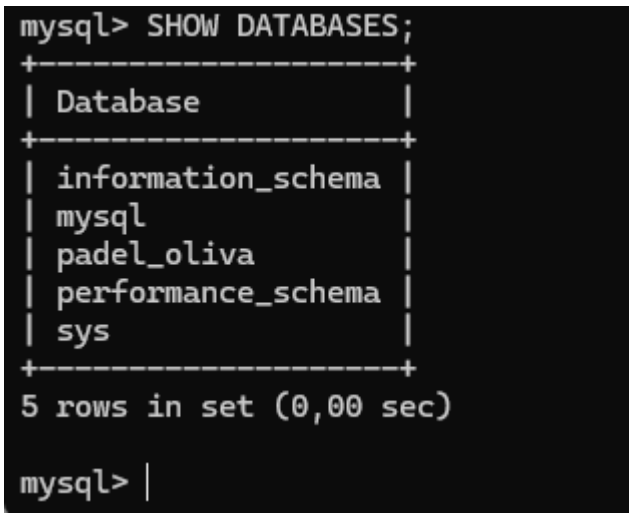

Accedo a la consola de mysql como root (no tiene contraseña), creo una base de datos de prueba, creo el usuario ramon con la contraseña 12345678 (en las capturas se ve que la primera contraseña falla por no cumplir la política) le damos todos los privilegios en la BD padel_oliva y recargamos permisos.

3 Conclusiones

Poco que añadir, instalamos MySQL, aseguramos la instalación y hacemos unas pequeñas pruebas.