

## Create checkpoint from Postman - Request

**URI :**

http://localhost:8080/checkpoint

**HTTP Method :**

POST

**Content-Type :**

application/json

**Sample Payload : Body Raw**

```
{  
  "name": "Design",  
  "projectId": "8dd5f315-9788-4d00-87bb-10eed9eff566"  
}
```

The screenshot shows the Postman application interface. At the top, there's a menu bar with 'File', 'Edit', 'View', and 'Help'. Below it is a toolbar with buttons for '+ New', 'Import', 'Runner', and a dropdown menu. The main workspace is titled 'My Workspace' and 'Invite'. The request is named 'POST checkpoint' and is set to 'No Environment'. The HTTP method is 'POST' and the URL is 'http://localhost:8080/checkpoint', which is highlighted with a red box and labeled 'checkpoint URI'. The 'Body' tab is selected, showing a raw JSON payload: 

```
{  
  "name": "Design",  
  "projectId": "8dd5f315-9788-4d00-87bb-10eed9eff566"  
}
```

. A red arrow points to the 'projectId' value, with a text box stating: 'This is the projectId of type UUID. As the app doesn't have a feature to add new project, I have provided a sample UUID in the README file.' The 'Response' section at the bottom is empty, showing a rocket icon and the text 'Hit Send to get a response'. The bottom status bar includes 'Find and Replace', 'Console', 'Bootcamp', 'Build', 'Browse', and other icons.

Create checkpoint from Postman - Response

Postman

File Edit View Help

+ New Import Runner

My Workspace Invite

Refresh Share Settings Heart User Upgrade

POST POST checkpoint

No Environment

Examples 0 BUILD

POST http://localhost:8080/checkpoint

Send Save

Params Authorization Headers (9) Body Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

Cookies Code Beautify

1 2 3 4

```
"name": "Design",
"projectId": "8dd5f315-9788-4d00-87bb-10eed9eff566"
```

Body Cookies Headers (9) Test Results

Status: 201 Created Time: 206 ms Size: 482 B Save Response

Pretty Raw Preview Visualize JSON

1 2 3 4 5 6 7

```
{
  "id": "a1bc7e2a-a35b-4ac7-bc2a-b893a6946936",
  "name": "Design",
  "projectId": "8dd5f315-9788-4d00-87bb-10eed9eff566",
  "complPercentage": 0,
  "tasks": []
}
```

This is the 'checkpointId' that will be used when we create tasks.

Find and Replace Console

Bootcamp Build Browse

## Create Tasks from Postman - Request

URI :

http://localhost:8080/task

HTTP Method :


POST

Content-Type :

application/json

Sample Payload : Body Raw

```
{
  "text": "Recent updates 1",
  "complPercentage": 40,
  "checkpointId": "9f20460f-3278-4485-8035-ec3b88a0b29b"
}
```

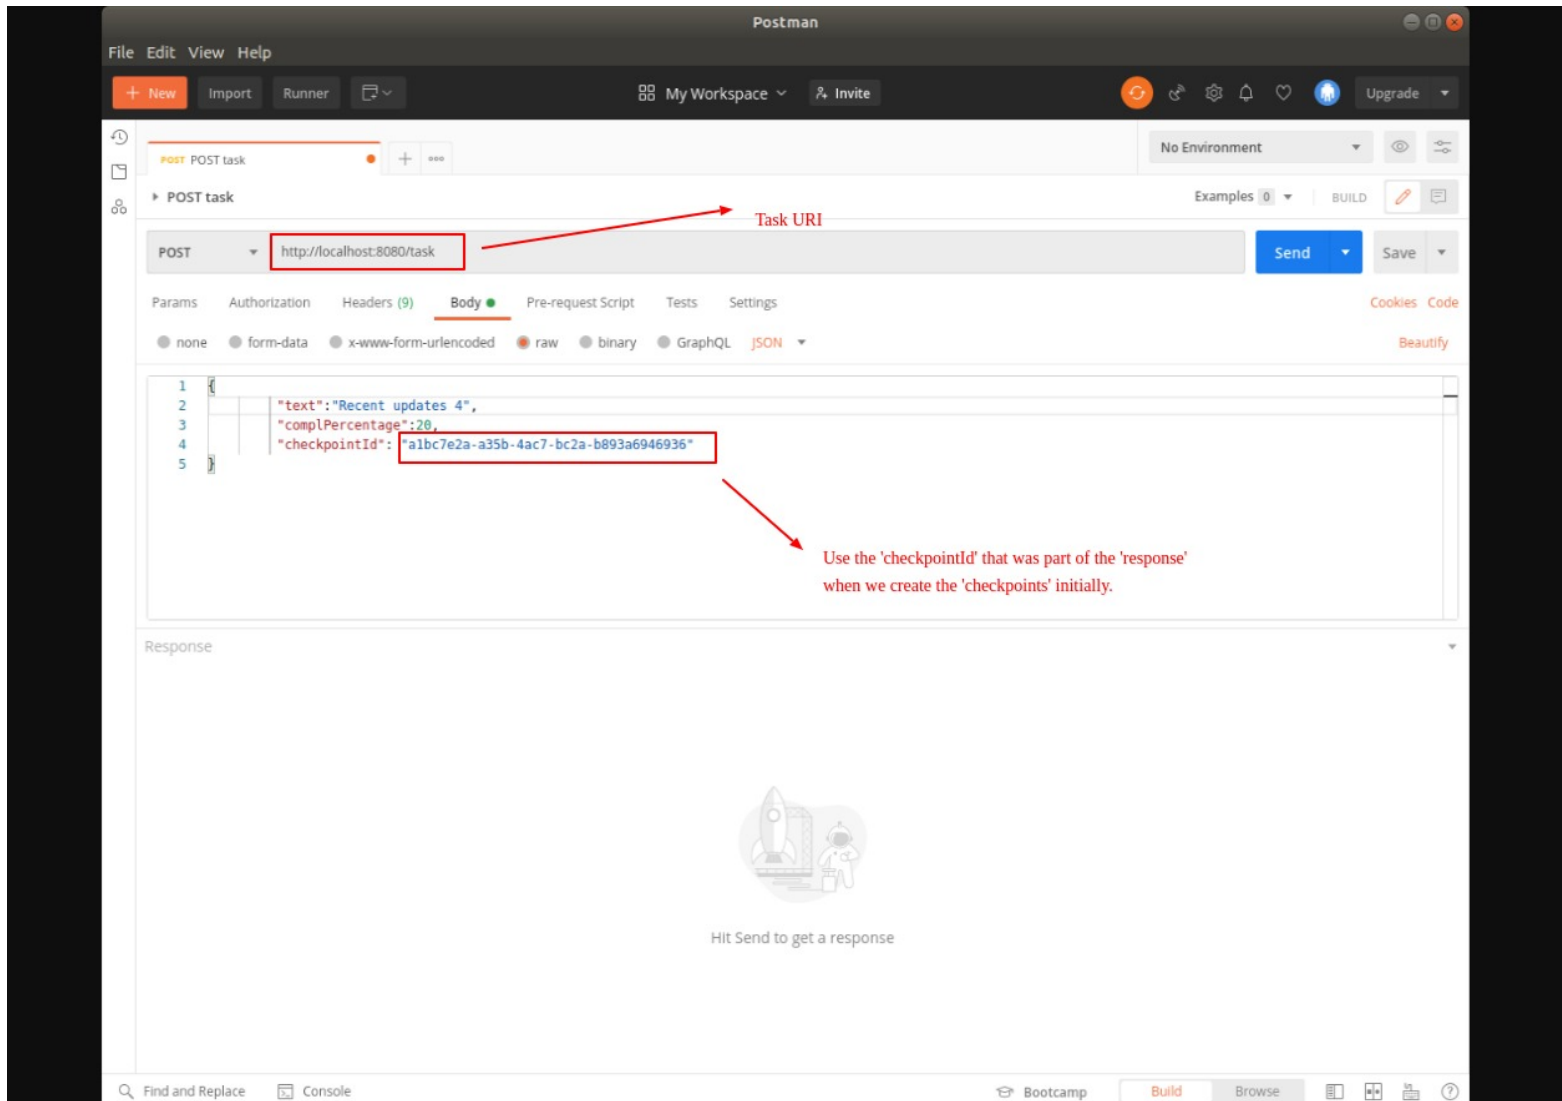

Create Tasks from Postman - Response

