


Week1 Summary

Spelling in English is inconsistent with its pronunciation, which call for the study of **phonetics**, all about the speech sound. We look at the actual sound of a word, and use phonetic symbols to describe it. There are about 44 distinguishable sounds that form words: **phonemes**, much diversified than 26 letters in the English language. Each phoneme represents vowels(monophthongs, diphthongs) or consonants. The study area of phonetics can be divided into three categories; articulatory, acoustics, and auditory, each accounting for production, transmission, and hearing of speech sound.

* Articulation

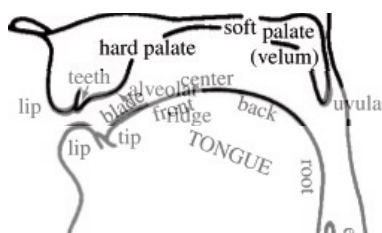

Making a speech sound is related to physical movements of human organs. Depending on subtle changes in the vocal tract (pharynx, epiglottis, uvula, soft palate(velum), hard palate, alveolar ridge, teeth, tongue body, tongue tip, and lip) while air flows, different sounds are articulated. We can divide five speech organs which control constrictions: lip, tongue tip, tongue body, larynx(vocal cords), and velum.

(1) Articulatory process in lips/ tongue tip/ tongue body

- Constriction Location(CL)
 - lips(bilabial/labiodental): p, b, m, w, f, v
 - tongue tip(dental/alveolar/palate-alveolar/retroflex): θ, ð, t, d, s, z, n, l, ʃ, ʒ, tʃ, dʒ, r
 - tongue body(palatal/velar): j, k, g, ŋ, h (+ change in oral cavity makes different vowels)
- Constriction Degree(CD)
 - upper part(nearly closed)> stop(p, b, t, d, k, g) - fricative(f, v, θ, ð, s, z, ʃ, ʒ, h) - approximant(w, l, r, j) - vowels <lower part(opened)

(2) Phonation process in larynx(voice box)


- Vocal cords(=vocal folds) vibrate in a varied degree when air flows from the lung.
- Voiced(vocal cords closed): b, d, g, v, ð, z, ʒ, dʒ, m, n, ŋ, l, r, w, j
- Voiceless(vocal cords opened): p, t, k, f, θ, s, ʃ, h, tʃ

(3) Oro-nasal process in velum

- When the velum is lowered, the nasal tract is opened, so we can breathe through nose and produce nasal sounds m, n, ŋ.
 - Velum: m, n, ŋ
- When the velum is raised, the nasal tract is closed, and we can produce every vowel and every consonant except for nasal sounds m, n, ŋ.

We can predict any phonemes with description of constricting environment, for example, "t," is a sound produced when velum is raised(not nasal sounds), larynx is opened(voiceless), constriction location is at tongue tip(alveolar) and constriction degree is upper part(stop).

* Acoustics




With Praat, we can examine the duration, intensity(loudness), pitch(65-200Hz for male speech, and 145-275Hz for female speech), spectrogram, formant(ed dots signify different vowels) of sounds. **Pitch** is defined as the number of occurrences of repeating event per second(Hz). We can see the repeated event as the vocal cords vibrate repeatedly. For example, 236.5Hz means there was 236 times of vibration in vocal cords per second, single event took 0.004228 seconds to be concluded. A pure tone of certain frequency shows sine wave and every natural sound can be represented with simplified sine wave of same frequency.


Articulation	CL	CD	Velum	Larynx
/p/	bilabial	stop	raised	open
/d/	alveolar	stop	raised	closed
/z/	alveolar	fricative	raised	closed
/n/	alveolar	stop	lowered	closed

Week2 Summary

Every signal(including sounds) can be expressed with a synthesis of various sine waves. We call sounds of a sine wave as a simplex(pure) tone and a sum of sine waves as a complex tone. A sine wave is shaped by frequency and amplitude of a sound over time. A lower frequency means fewer vibrations in vocal cords, which produces sparse graph and vice versa. 100Hz signifies 100 times of vibrations per second and, if doubled, it becomes 200Hz. Amplitude; air pressure, is not an intrinsic value of a sound source but varies over a wide range depending on the distance, closer the bigger, thus, producing bigger graph and vice versa.



In the graph left-side where sound waveforms are depicted, x-axis means time in seconds and y-axis means value. In spectrum right-side(spectral slice of spectrogram), x-axis corresponds to frequency(Hz) and y-axis corresponds to amplitude over time. Spectrogram is a temporal concatenation of spectrum, its x-axis being time and y-axis being frequency. Light-Dark gradation represents the amplitude of each frequency, lower in frequency being darker in the case of a pure tone spectrogram.



Human voice source is a sound at larynx, which can be measured by ElectroGlottograph(EGG). When we focus on the sound pitch(magnitude and frequency, source can be sorted as a complex tone, consisting of harmonics. A complex tone is a sum of pure tones at integer multiples of the lowest pure tone(fundamental frequency = F_0 = pitch). Source-filter theory represents speech production process where sound sources of distinct spectrum are filtered by the resonant properties of the vocal tract. While source shows gradually decreasing graph in the frequency spectrum, filtered by vocal tract(audio) shows zigzagging(carved) graph with peaks and valleys. Amplitude Peaks in the frequency spectrum of the sound are analyzed as formants, the spectral shaping by acoustic resonances of the vocal tract. The formant with the lowest frequency is called F1, the second F2. In a graph where x-axis is F2 and y-axis is F1, corresponding to the geometry of mouth, we can locate every monophthong as spots and diphthong as lines, as x-axis determines front/back position and y-axis determines height of vowels.

Week3 Summary

모든 언어는 사용자 간 소통을 가능케 하는 단어와 문법으로 구성된다. 단어가 사용자 의도에 따라 정보를 담는 그릇 역할을 한다면, 문법은 단어를 이어 상대에게 전달하는 역할을 한다. 프로그래밍 언어에도 정보를 담는 그릇인 변수와 사람과 기계가 소통하기 위한 문법이 존재하며, 크게 variable assignment(변수 할당), if conditioning(if문), for conditioning(for문), function(입력-출력 패키지 함수)로 표현할 수 있다.

MacOS 터미널에서 jupyter notebook을 실행하면, 웹 브라우저에서 컴퓨터 디렉토리를 전시하고, 파이썬 프로그램을 사용할 수 있다. 변수에 넣을 수 있는 정보의 종류에는 숫자와 문자열이 있다. 숫자는 그대로 사용할 수 있지만, 문자는 인용구로 사용해야 한다. 인용구가 아닌 문자는 변수명으로 인식된다. 하나의 cell에 여러 코드를 쓰려면 enter을 하거나 semicolon(;)을 사용해야 한다. 리스트는 square bracket[] 안에 comma(,)를 이용하여 정보를 연결하며, 모든 자료형 정보를 가질 수 있다. 튜플은 () 안에 comma(,)를 이용하여 정보를 연결하며, 모든 자료형 정보를 가질 수 있다. 딕셔너리는 {} 안에 comma(,)를 이용하여, 표제어: 설명 형식의 정보를 연결하며, 표제어는 고정값을 갖는 자료형(숫자, 문자열, 튜플) 정보를 이 변수 정보를 가질 수 있다.

❄ 변수 할당: 변수명 = 정보

❄ 리스트 인덱싱: 리스트 변수명[인덱스#]

- * print함수: print(입력)
- * type함수: type(입력)
 - * int: 정수 / float: 실수 / str: 문자열 / list: 리스트 / tuple: 튜플 / dict: 딕셔너리
- * cell: 입력창
 - * cell select A: create a new cell above the selected cell
 - * cell select B: create a new cell below the selected cell
 - * cell select X: delete the selected cell
 - * cell select Run or Shift Enter: run cell by cell
- * examples

* b = 'love' : 변수명 b에 문자열 'love'를 할당한다.
 * love = 2 : 변수명 love에 숫자 2를 할당한다.
 * b = love : 변수명 b에 변수 love를 할당하는데, 변수 love는 숫자 2를 값으로 갖는다.

Week4 Summary

- * 변수에 정보를 할당할 때, 변수를 사용하여 할당된 정보를 불러들여 처리할 수 있다.
 - * 함수(입력값) 출력 결과는 입력값의 함수처리 값이다. (ex) float(숫자): 실수화, int(숫자):정수화, str(숫자, 문자열, 튜플, 리스트, 딕셔너리 cluster 문장 부호까지 문자열 요소로 다룸):문자열화, list([숫자, 문자열 cluster]또는 '문자열' slice):리스트화, tuple([숫자, 문자열 cluster] 또는 '문자열' slice):튜플화, dict([{}]): 딕셔너리화)
 - * 요소 불러오기: 변수명[인덱스]
 - * 인덱스는 정보 왼쪽은 0부터, 오른쪽은 -1을 기준 위치로 삼기 때문에, 첫번째 요소는 변수명[0]이고, 마지막 요소는 변수명[-1]이다.
 - * 여러 요소 불러오기: 변수명[인덱스 시작:인덱스 끝+1]
 - * len(변수명)함수는 정보의 길이를 구한다.
 - * 변수명.upper()함수는 변수 안에있는 모든 문자를 대문자로 변환한다.
 - * 문자열에서 + '문자열'은 문자열을 결합, 확장하고, *#은 요소를 #번 반복하여 문자열을 extend한다.
 - * 리스트에서 + [리스트]는 리스트 extend(확장)이고, *# 은 요소를 #번 반복하여 리스트 extend한다.
 - * 변수명.find('찾는 요소')함수는 찾는 요소의 위치를 출력한다.
 - * 변수명.rindex('찾는 요소')함수는 찾는 요소를 오른쪽부터 찾아서 위치를 출력한다.
 - * 변수명.strip('제거할 요소')함수는 문자열 앞뒤에서 '제거할 요소'를 제거한 결과를 출력한다.
 - * 변수명.split('분리할 기준 요소')함수는 문자열에서 '분리할 기준 요소'를 기준으로 문자열을 분리하여 리스트화한다.
 - * '합칠 기준 요소'.join(iterable)함수는 문자열구조에 합칠 요소를 기준으로 iterable 요소를 합쳐서 문자열화한다.
 - * 변수명.replace('기존 요소값', '바꿀 요소값')함수는 문자열에서 '기존 요소값'을 '바꿀 요소값'으로 일괄 변경한다.
 - * markdown은 기본 cell에서 #입력과 같이 실행 무효화 효과가 있다.

* syntax

* for문과 if문

- * for i in ____ :
- * in 뒤 ____에 있는 요소값을 하나씩 불러서 i에 할당하고, : 뒤의 문장을 실행한다.

* **for i in range(#) :**

 * **range(#)**

 * 0부터 #까지 인덱스를 만든다

 * # = len(____)이면 ____의 길이만큼 인덱스를 만든다.

* **enumerate(____) **a변수 b변수가 길이가 같아야 한다**

 * ____에 추가로 번호를 매긴다.

 * **for i,s in enumerate(a):**

 * i: 인덱스 번호값, s:요솟값

* **{^^}: {**}%'.format(^^값,**값)**

 * == ^^값: **값%

* **zip(____,____)**

 * 앞 변수와 뒤 변수가 페어로 묶인다.

 * **for i, s in zip(a, b):**

 * i a 첫 요소~, s b 첫 요소~

* **nested for loop**

 * **range(#)**은 0부터 #까지 인덱스가 만들어진다.

 * **range(#1, #2)**는 #1~(#2-1)까지 인덱스가 만들어진다.

 * 바깥 루프는 바깥 range만큼 돌고, 안 루프는 바깥 range * 안 range만큼 돈다.(곱셈)