

Visualizing Collections Of Internet Archives

John Berlin, Joel Rodriguez, Slobodan Milanko

Motivation

- Current solutions are limiting; small focus
- Archivists are unable to visually experience their collections
 - Lack of URI evolution
 - Lack of comparison
- User driven, clutter free, design for moderate collections
- Archivists desire to visually share collections with each other.




Dataset Description

- We're abstracting the user's archive collection as a table.
- Key attributes that map to categorical or quantitative values.
 - Archiver - Categorical
 - Tags - Categorical
 - Number of archives - Quantitative
- The table approach:
 - Facilitates ordering
 - Filtering of data

Abstract Tasks


- Lookup, browse, explore and locate can be achieved easily with the table abstraction, and give meaning to the story.
- Users will be able to identify, compare and summarize different archive records, and their stories
- Analysis through discovery, presentation, and enjoyment

Potential Design

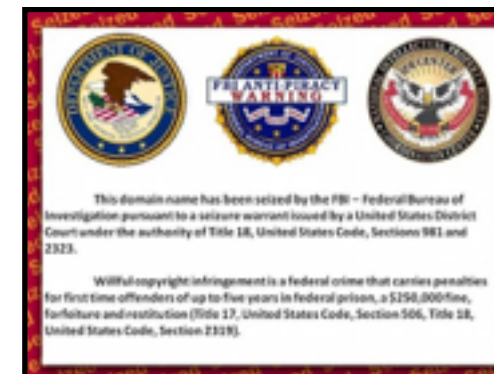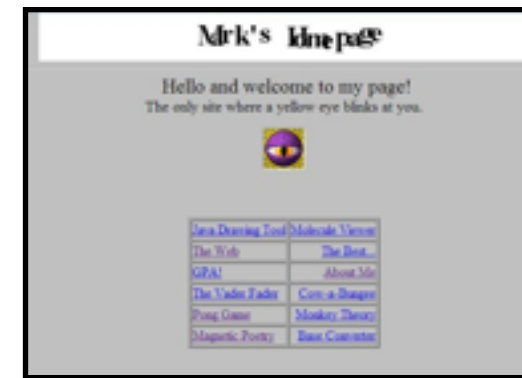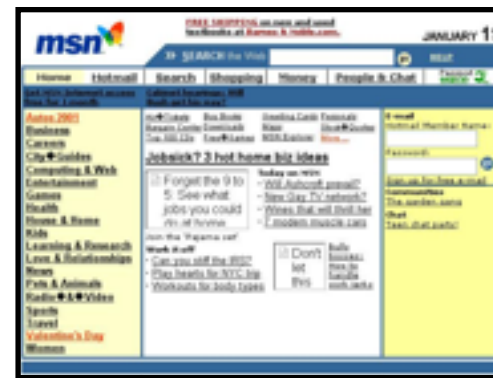


CONTROLS

User Driven Control

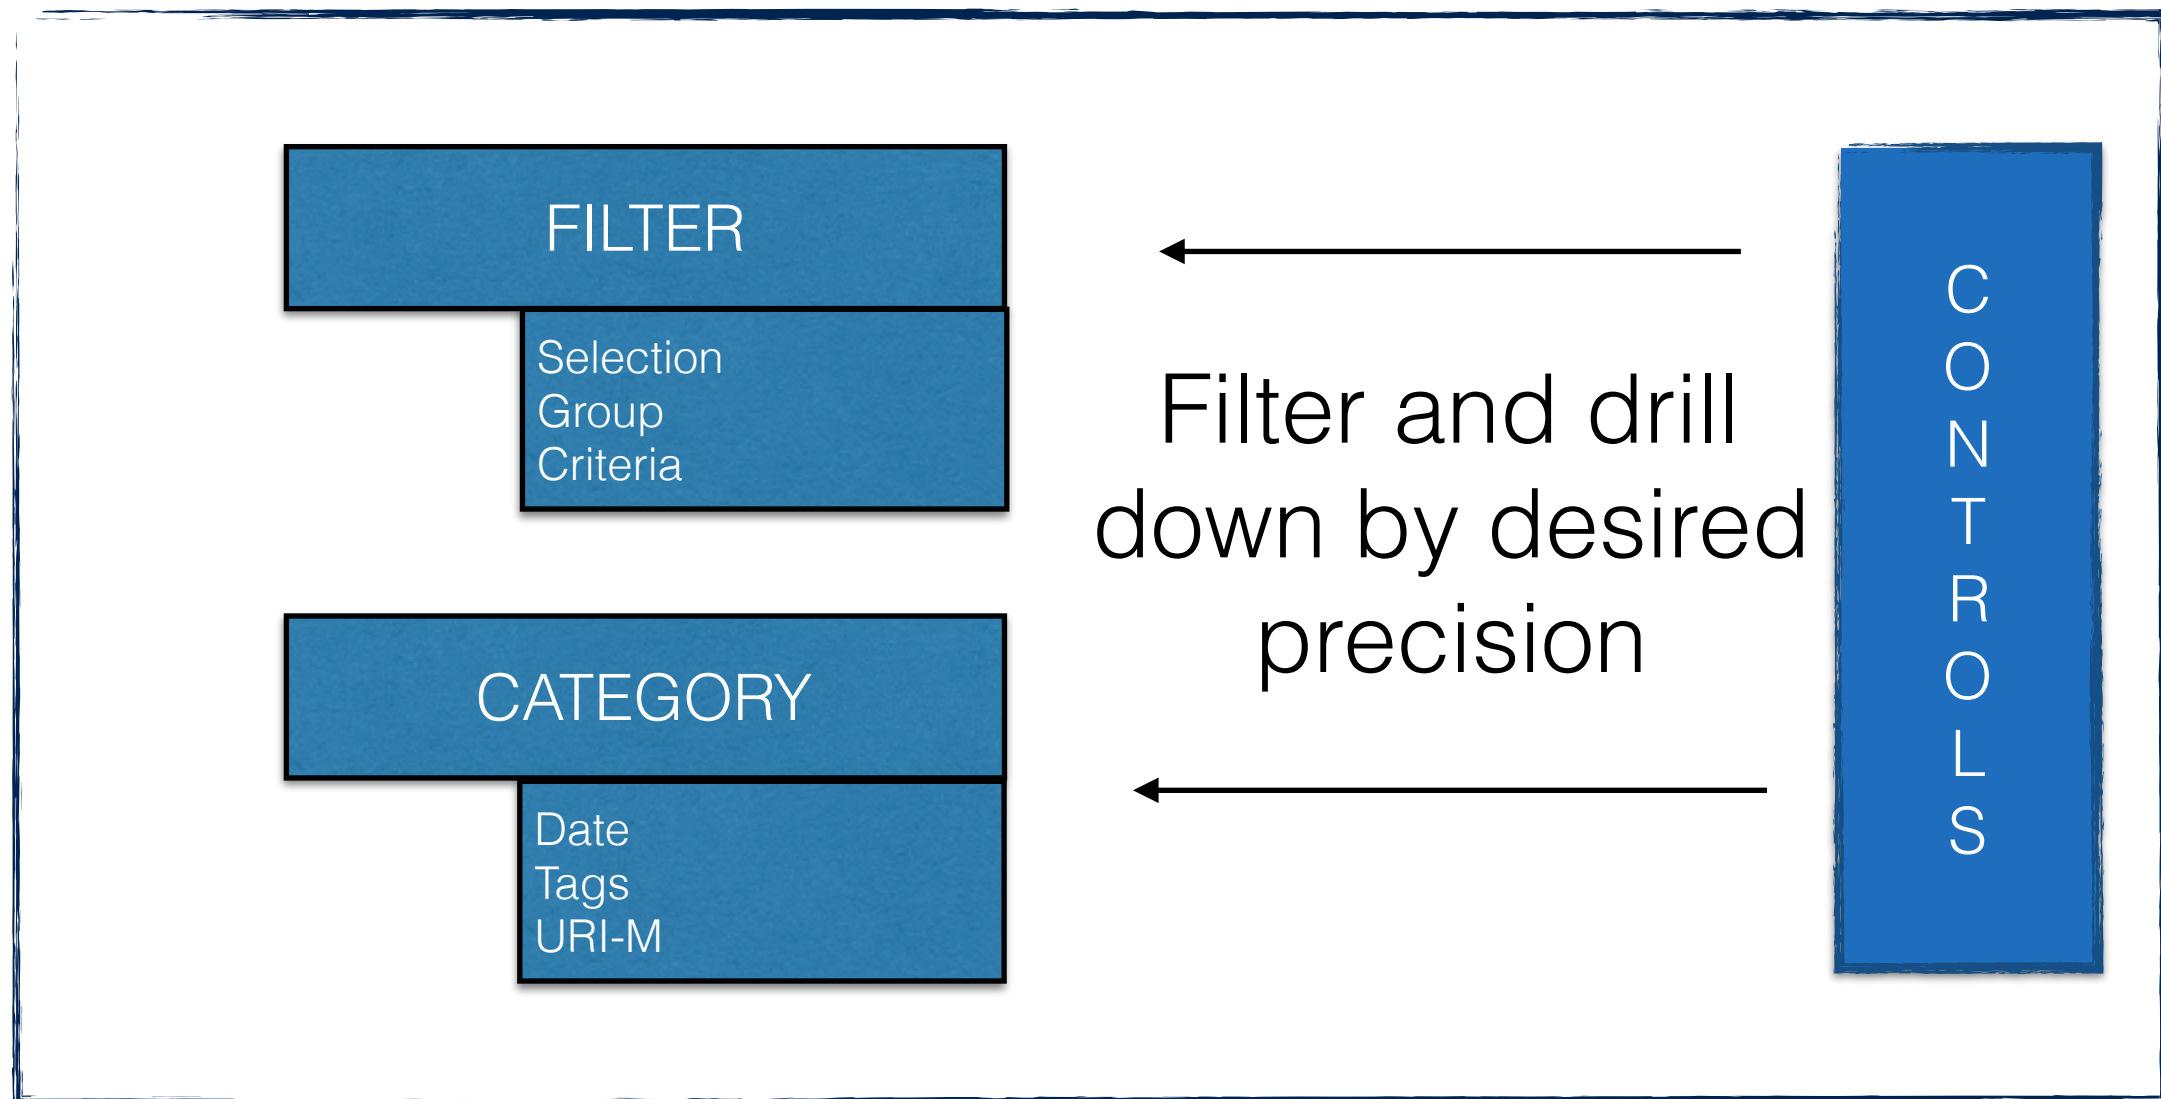

Detail

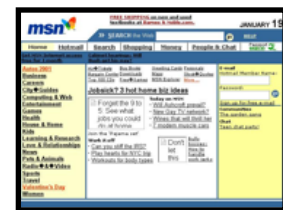

www.msn.com/news/june

June 22, 2001



www.msn.com/news/june

June 22, 2005



www.msn.com/news/may

May 22, 2005

BACK

Needed Tools

- Mink, WARCCreate
 - Create sample archives for local testing
- Wayback Machine (Local/Remote)
 - Get an understanding for look of archives
- WAIL
 - Local archiving and hosting
- PhantomJS (snapshots) and D3

Group Roles

- Entire Group
 - Code - Develop a working product
 - Test - Ensure visualization accepts dynamic data
 - Survey for feedback
 - Create demo
- Dan & Joel
 - Create final presentation
- John
 - Final presenter of solution

Estimation

- 4-6 weeks to develop
- 1 week to demo and test
- Weekly feedback to ensure satisfaction