



NOTES: (UNLESS OTHERWISE SPECIFIED)

1. SPECIFICATIONS AND DOCUMENTS:
1.1. ELECTRICAL CONNECTIONS SHALL BE IAW OH-INTERCONNECT.
2. ALL ITEMS NOT EXPLICITLY DEFINED IN THIS DRAWING ARE DEFINED BY THE MASTER CAD MODELS. ALL DIMENSIONS NOT DEFINED ON THIS DRAWING ARE CONTAINED WITHIN THE FOLLOWING MANUFACTURING FILES:
2.1. FLAT PARTS: <MATERIAL>_<MATERIAL COLOR, IF APPLICABLE>_<THICKNESS, IN DECIMAL INCHES>_<PN>_<REV>.<VERSION NUMBER OF MODEL>.DXF
2.2. FDM 3D PRINTED PARTS: FDM_<PN>_<REV>.<VERSION # OF MODEL>.STL
2.3. MACHINED OR BENT PARTS: <PN>_<REV>.<VERSION # OF MODEL>.STEP


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	02/25/2024	
A	SHT 14 FN 4: REMOVED 1X PN 9654K421; FIXED ALL TITLE BLOCKS;	9/28/2026	

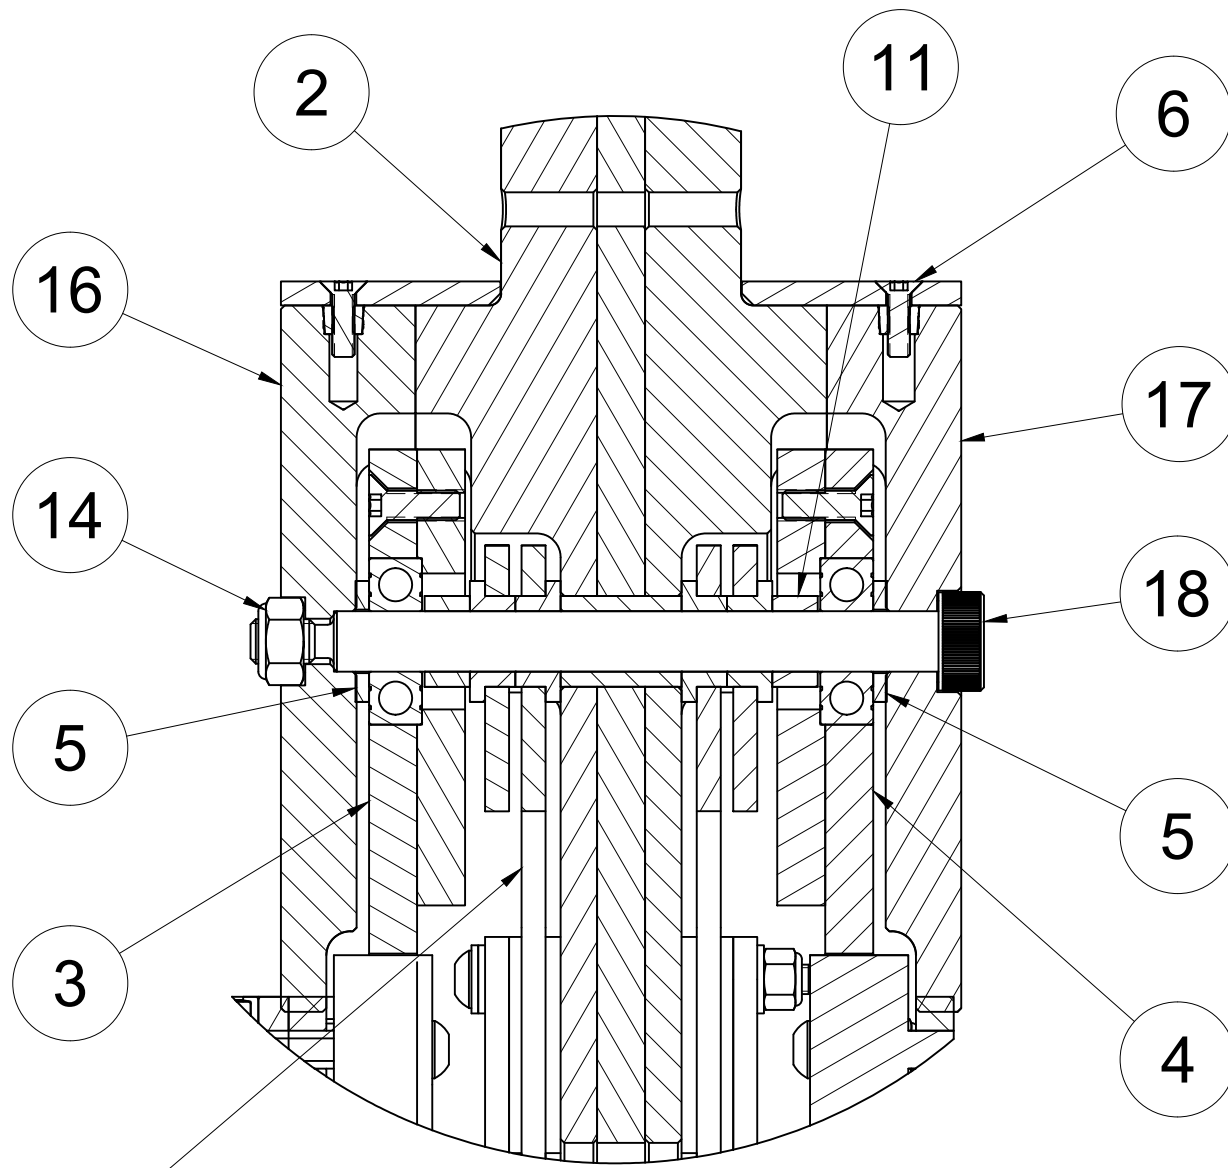


DETAIL E
SCALE 1:1

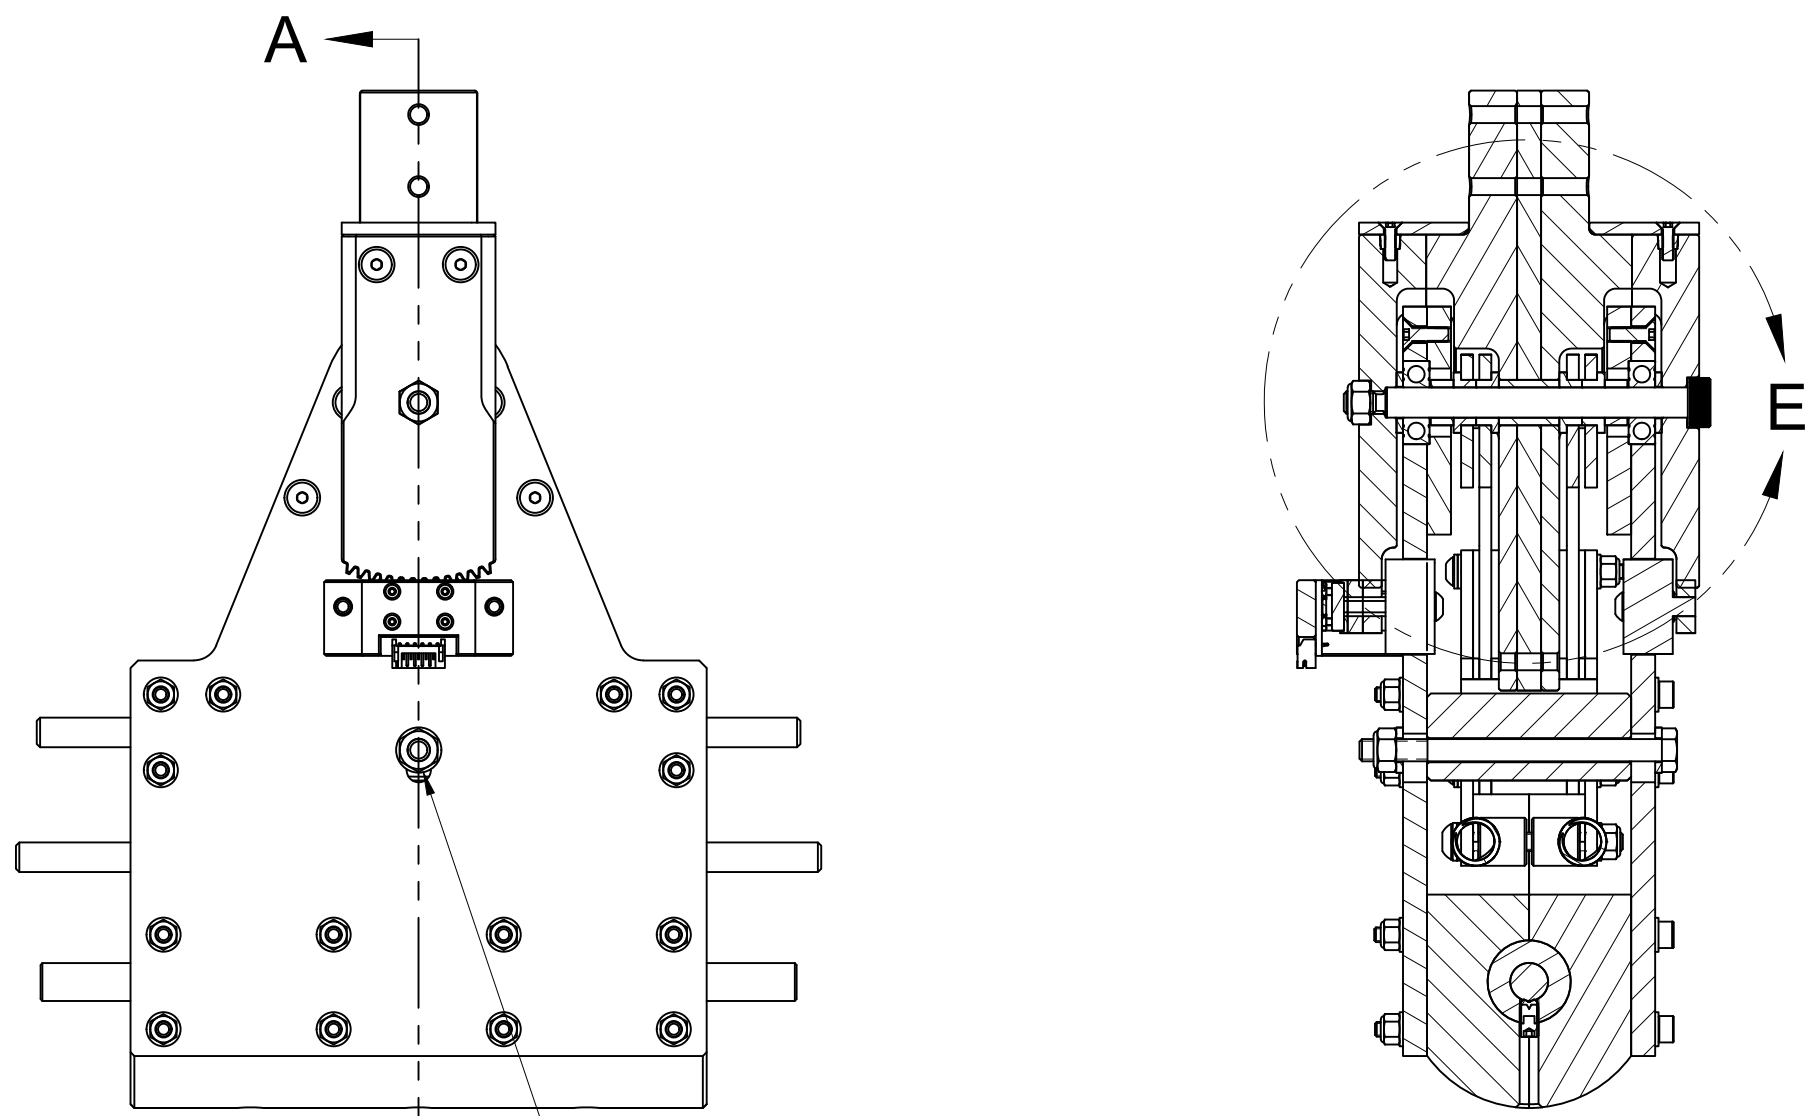

SECTION A-A
SCALE 1:2

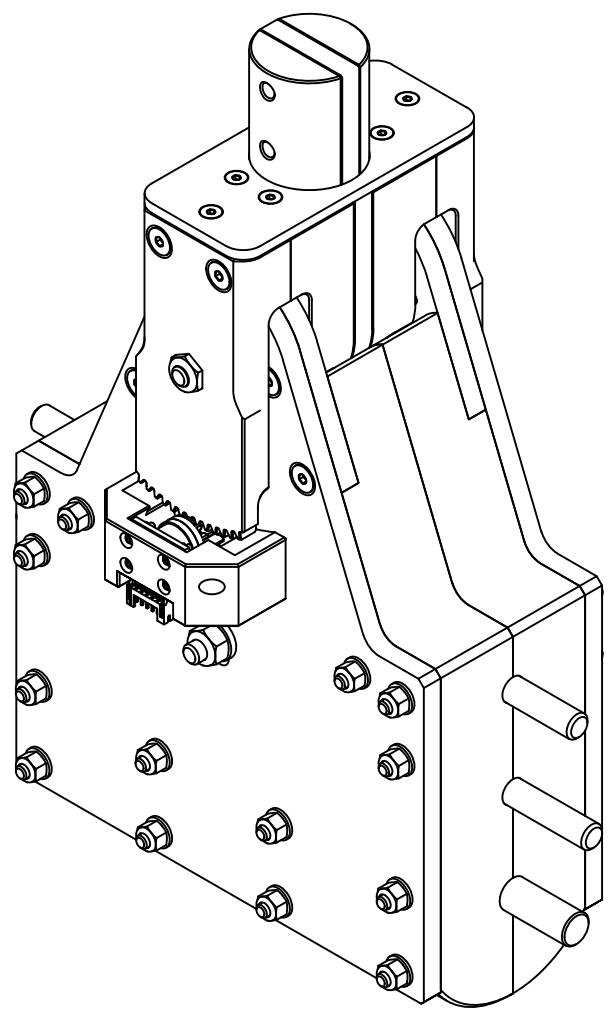

-100 ISO
SCALE 1:2

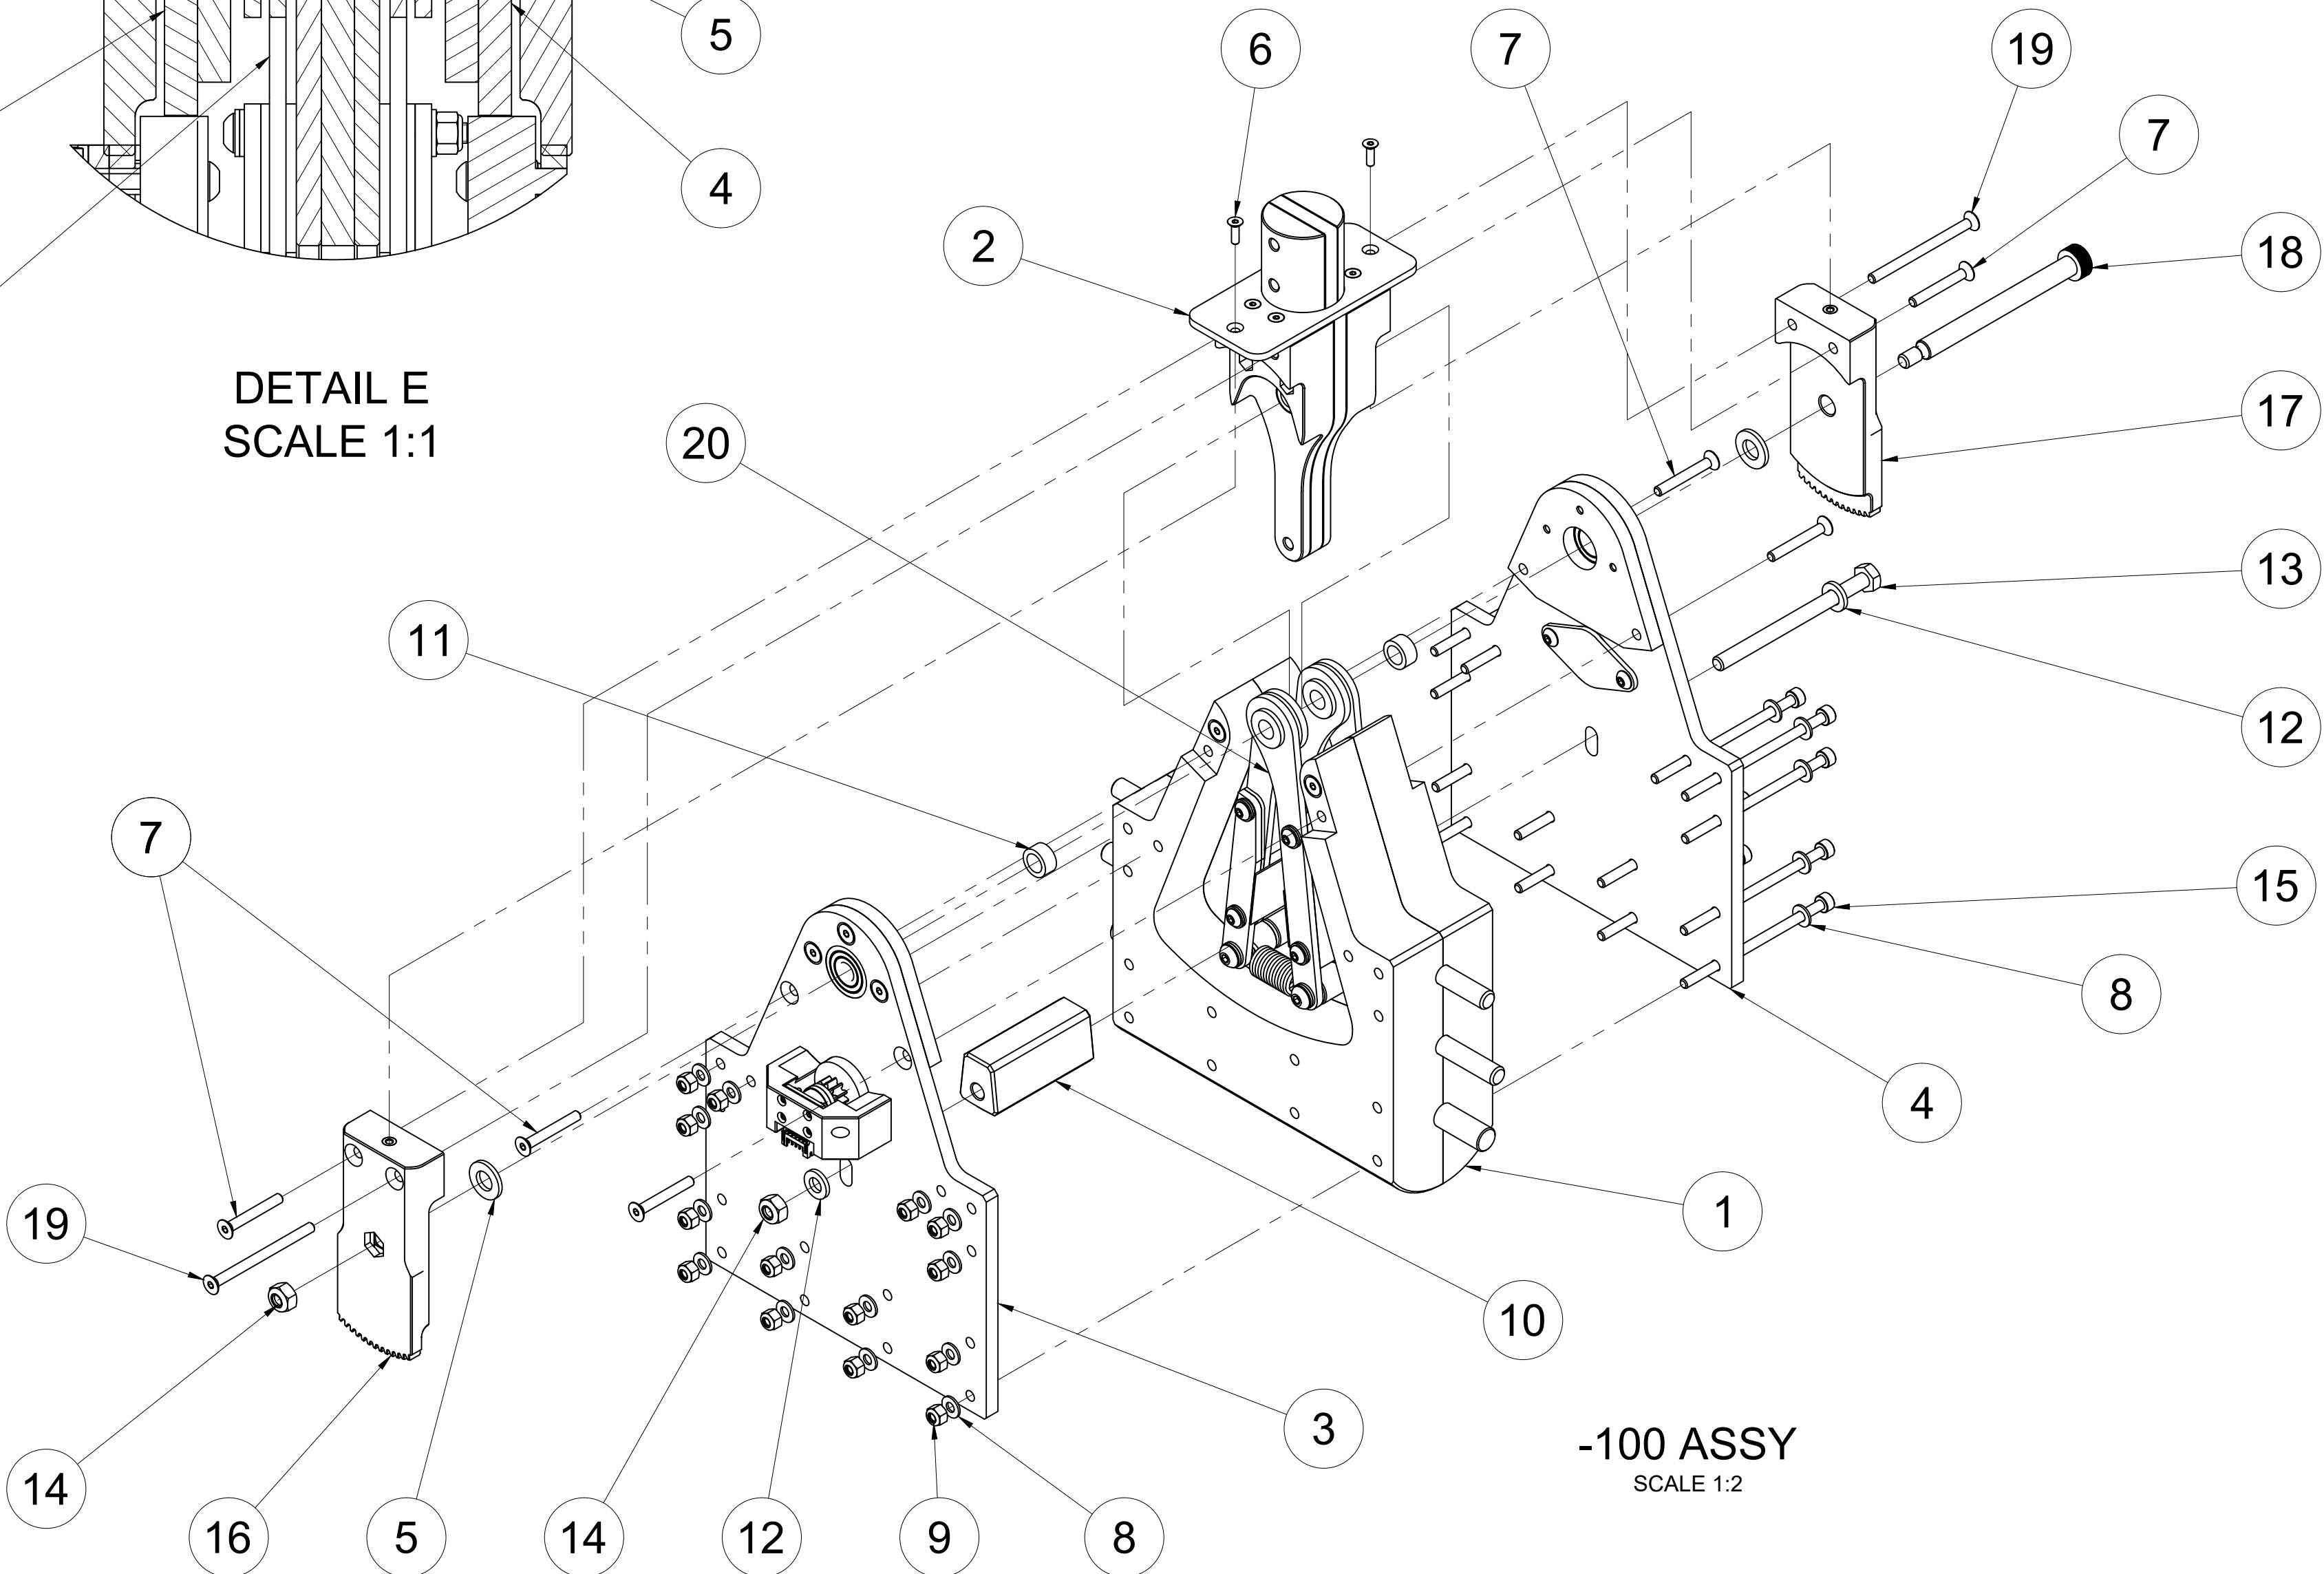

-100 ASSY
SCALE 1:2

20	1	OH3A3-125	ASSY, SCISSORS	----
19	2	92125A373	FHCS, M4 x 0.7 mm Thread, 55 mm Long	SS
18	1	92981A230	Shoulder Screw, M6 x 1mm, 8mm Shoulder Dia, 80mm Shoulder Len	STL
17	1	OH3A3-117	ASSY, ROLL DAMPER B	----
16	1	OH3A3-115	ASSY, ROLL DAMPER ARM A	----
15	14	91292A318	SHCS, M4 x 0.7 mm, 75 mm Long	SS
14	2	93625A250	Nyloc Hex Nut, M6 x 1 mm	SS
13	1	91287A254	HHS, M6 x 1 mm, 80 mm Long	SS
12	2	93475A250	Flat Washer, M6	SS
11	2	6658K734	8mm ID, 12mm OD, 6mm Lg, Oil-Embedded Bronze Sleeve Bearing	BRONZE
10	1	OH3A3-124	SCISSOR STOP	PETG
9	14	93625A150	Nyloc Hex Nut, M4 x 0.7 mm	SS
8	28	93475A230	Flat Washer, M4	SS
7	6	92125A203	FHCS - M4 x 0.7 mm Thread, 30 mm Long	SS
6	2	92125A130	FHCS, M3 x 0.5 mm, 10 mm Long	SS
5	2	93475A270	93475A270 - Flat Washer, M8	SS
4	1	OH3A3-122	ASSY, AFT MAIN PLATE	----
3	1	OH3A3-118	ROLL DAMPER ARM B	----
2	1	OH3A3-108	ASSY, PIVOTING STICK RISER MOUNT	----
1	1	OH3A3-101	ASSY, MAIN CASING	----
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL

UNLESS OTHERWISE SPECIFIED:			PARTS LIST	
DIMENSIONS ARE IN INCHES. DUAL DIMENSIONS ARE IN MILLIMETERS AND ENCLOSED IN SQUARE BRACKETS. INTERPRET DRAWING IAW ASME Y14.100-2017. INTERPRET DIM AND TOL IAW ASME Y14.5-2009. REMOVE ALL BURRS AND SHARP EDGES TO .05 MAX. DIMENSIONS APPLY BEFORE FINISH.			WUOS INCH TOLERANCES ARE: DECIMALS: .X ± .1 .XX ± .03 .XXX ± .010 ANGLES: MACHINED ± 5° LOCATING ± 5° FORMED ± 2° CHAMFERS ± 5° DRILLED HOLE DIAMETERS: .0135 - .125: +.004/- .001 .126 - .250: +.005/- .001 .251 - .500: +.006/- .001 .501 - .750: +.008/- .001 .751 - 1.000: +.010/- .001 1.001 - 2.000: +.012/- .001	
DESIGNED E. SCOTT 10/6/2022 CHECKED J. STEENSEN 05/03/2023 DRAWN E. SCOTT 10/6/2022				
SIZE D			DWG NO OH3A3-100	
SCALE 1:2			DO NOT SCALE DWG	
			SHEET 1/17	




ASSY, STICK YOKE

CENTER TUB

OH3A3-100

REV A

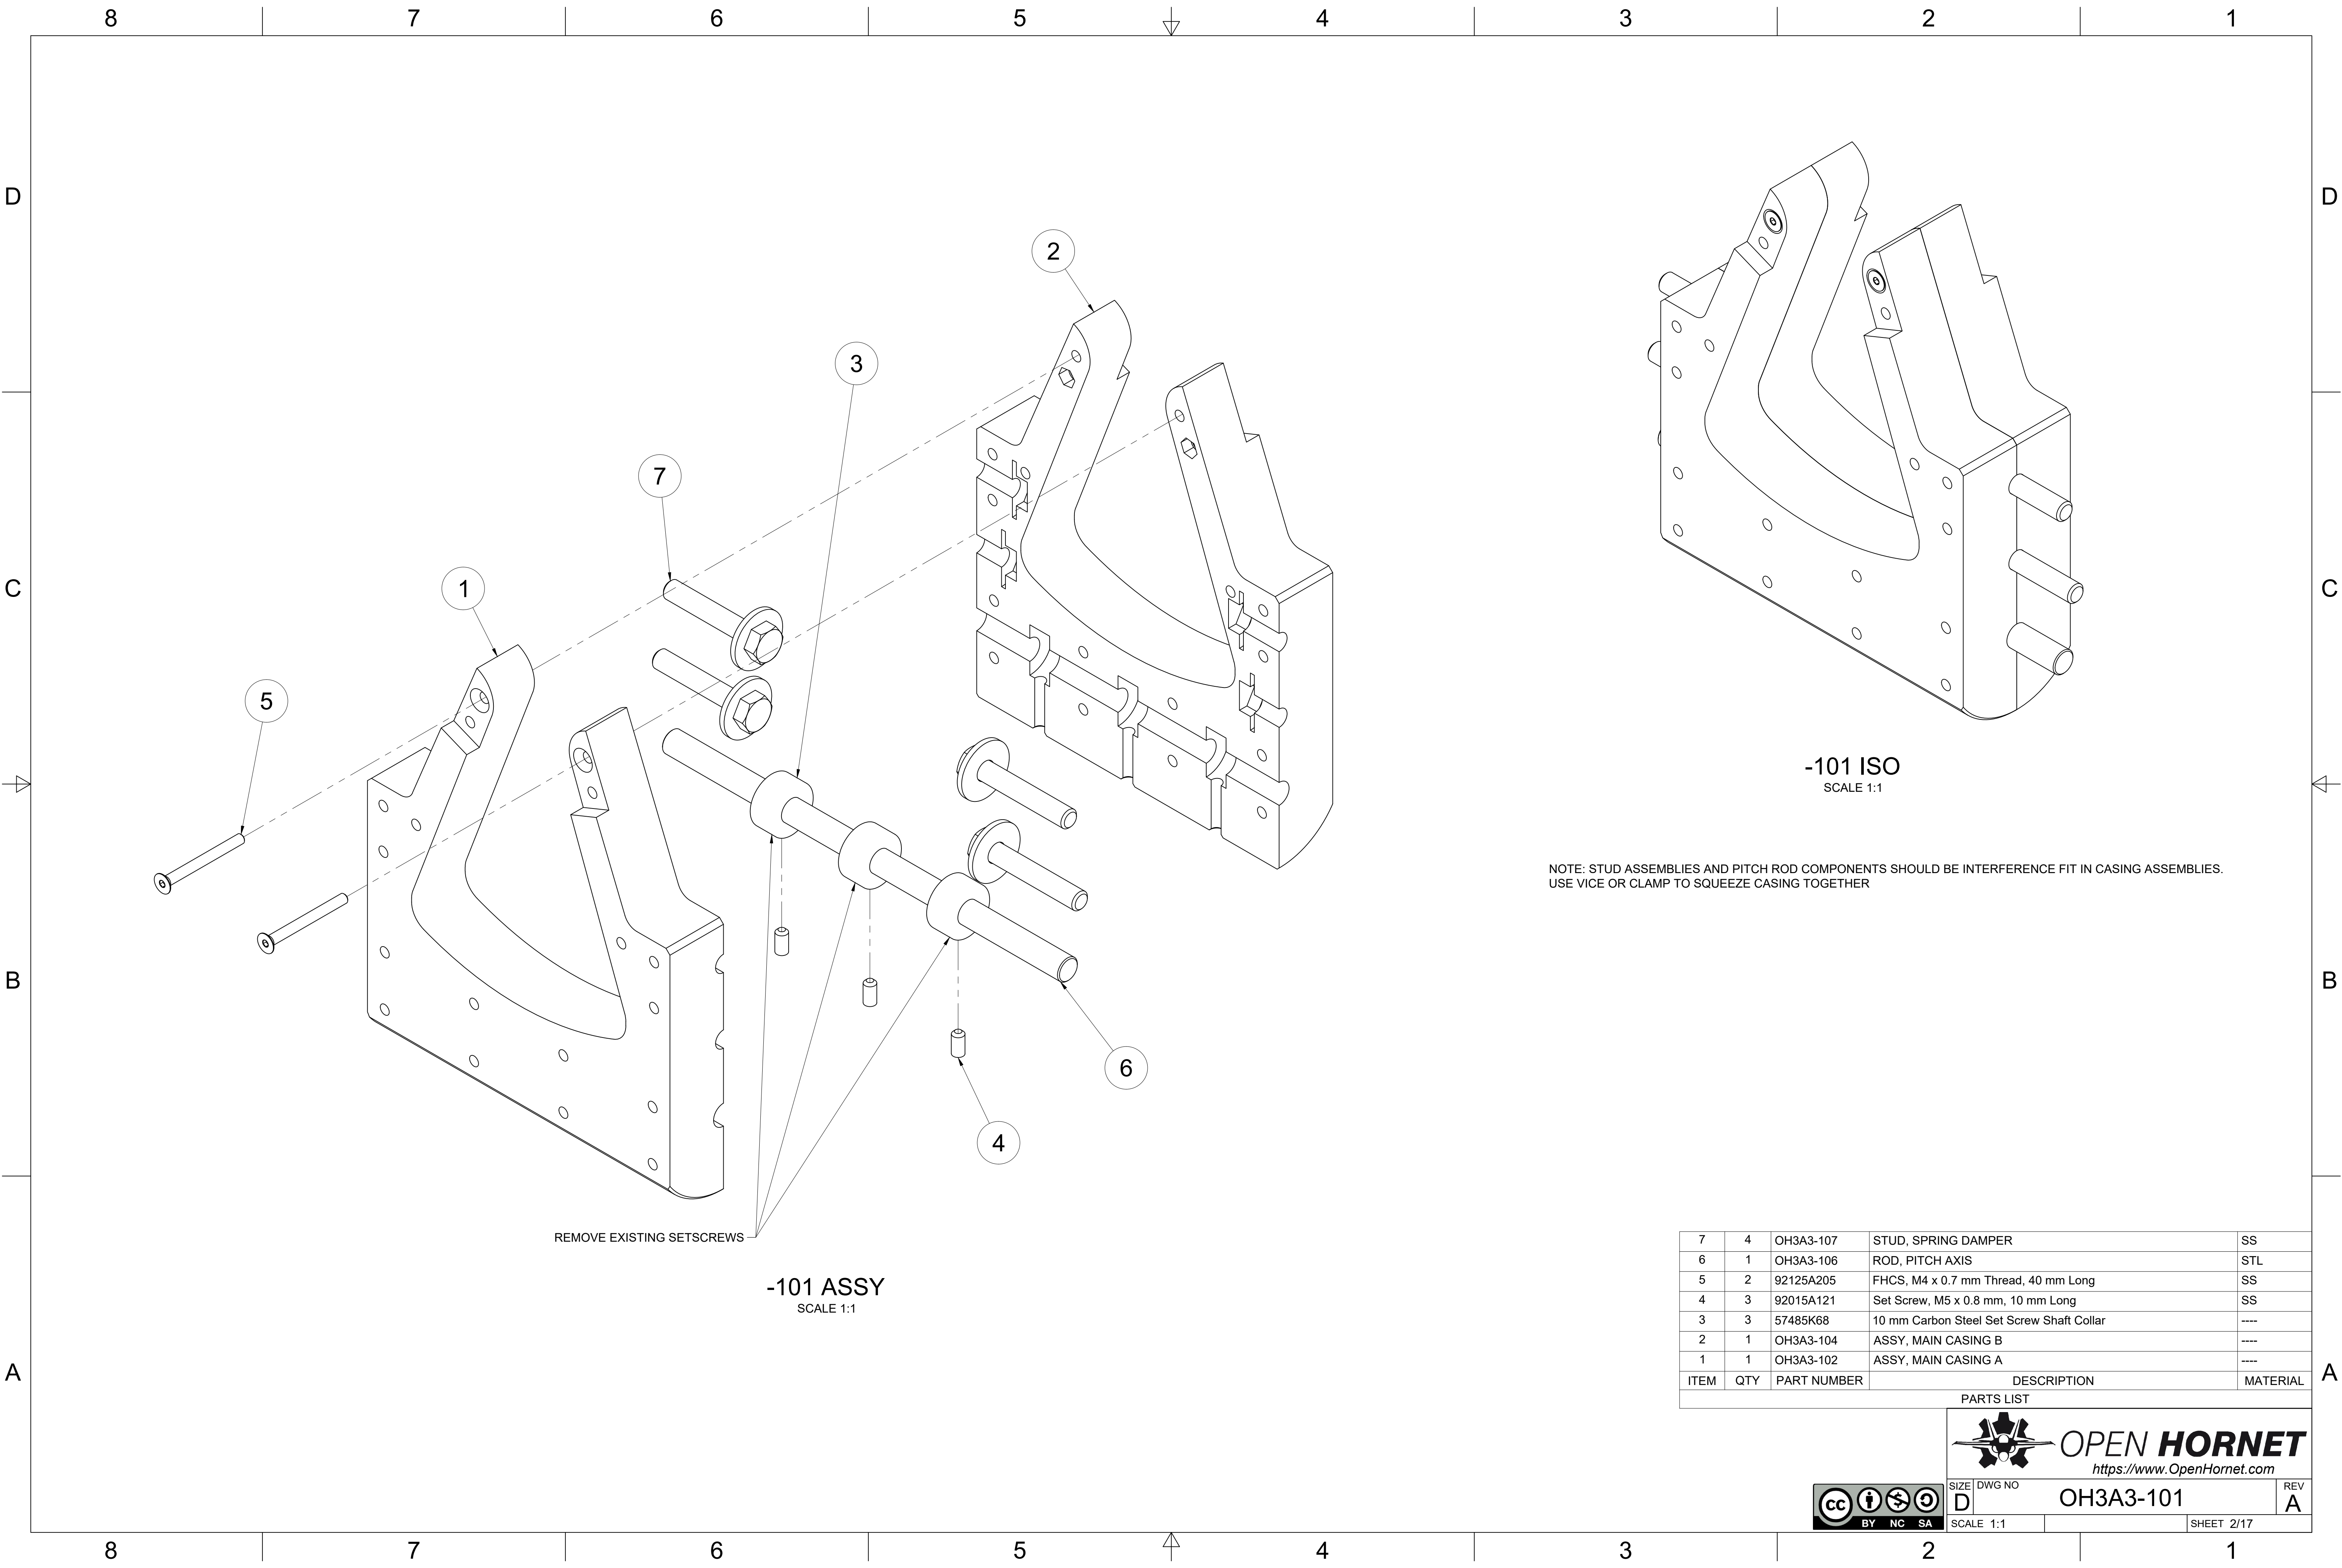

-101 ISO
SCALE 1:1

NOTE: STUD ASSEMBLIES AND PITCH ROD COMPONENTS SHOULD BE INTERFERENCE FIT IN CASING ASSEMBLIES.
USE VICE OR CLAMP TO SQUEEZE CASING TOGETHER


REMOVE EXISTING SETSCREWS

-101 ASSY
SCALE 1:1


7	4	OH3A3-107	STUD, SPRING DAMPER	SS
6	1	OH3A3-106	ROD, PITCH AXIS	STL
5	2	92125A205	FHCS, M4 x 0.7 mm Thread, 40 mm Long	SS
4	3	92015A121	Set Screw, M5 x 0.8 mm, 10 mm Long	SS
3	3	57485K68	10 mm Carbon Steel Set Screw Shaft Collar	----
2	1	OH3A3-104	ASSY, MAIN CASING B	----
1	1	OH3A3-102	ASSY, MAIN CASING A	----
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
PARTS LIST				



SIZE	D	DWG NO	OH3A3-101	REV	A
SCALE	1:1			SHEET	2/17

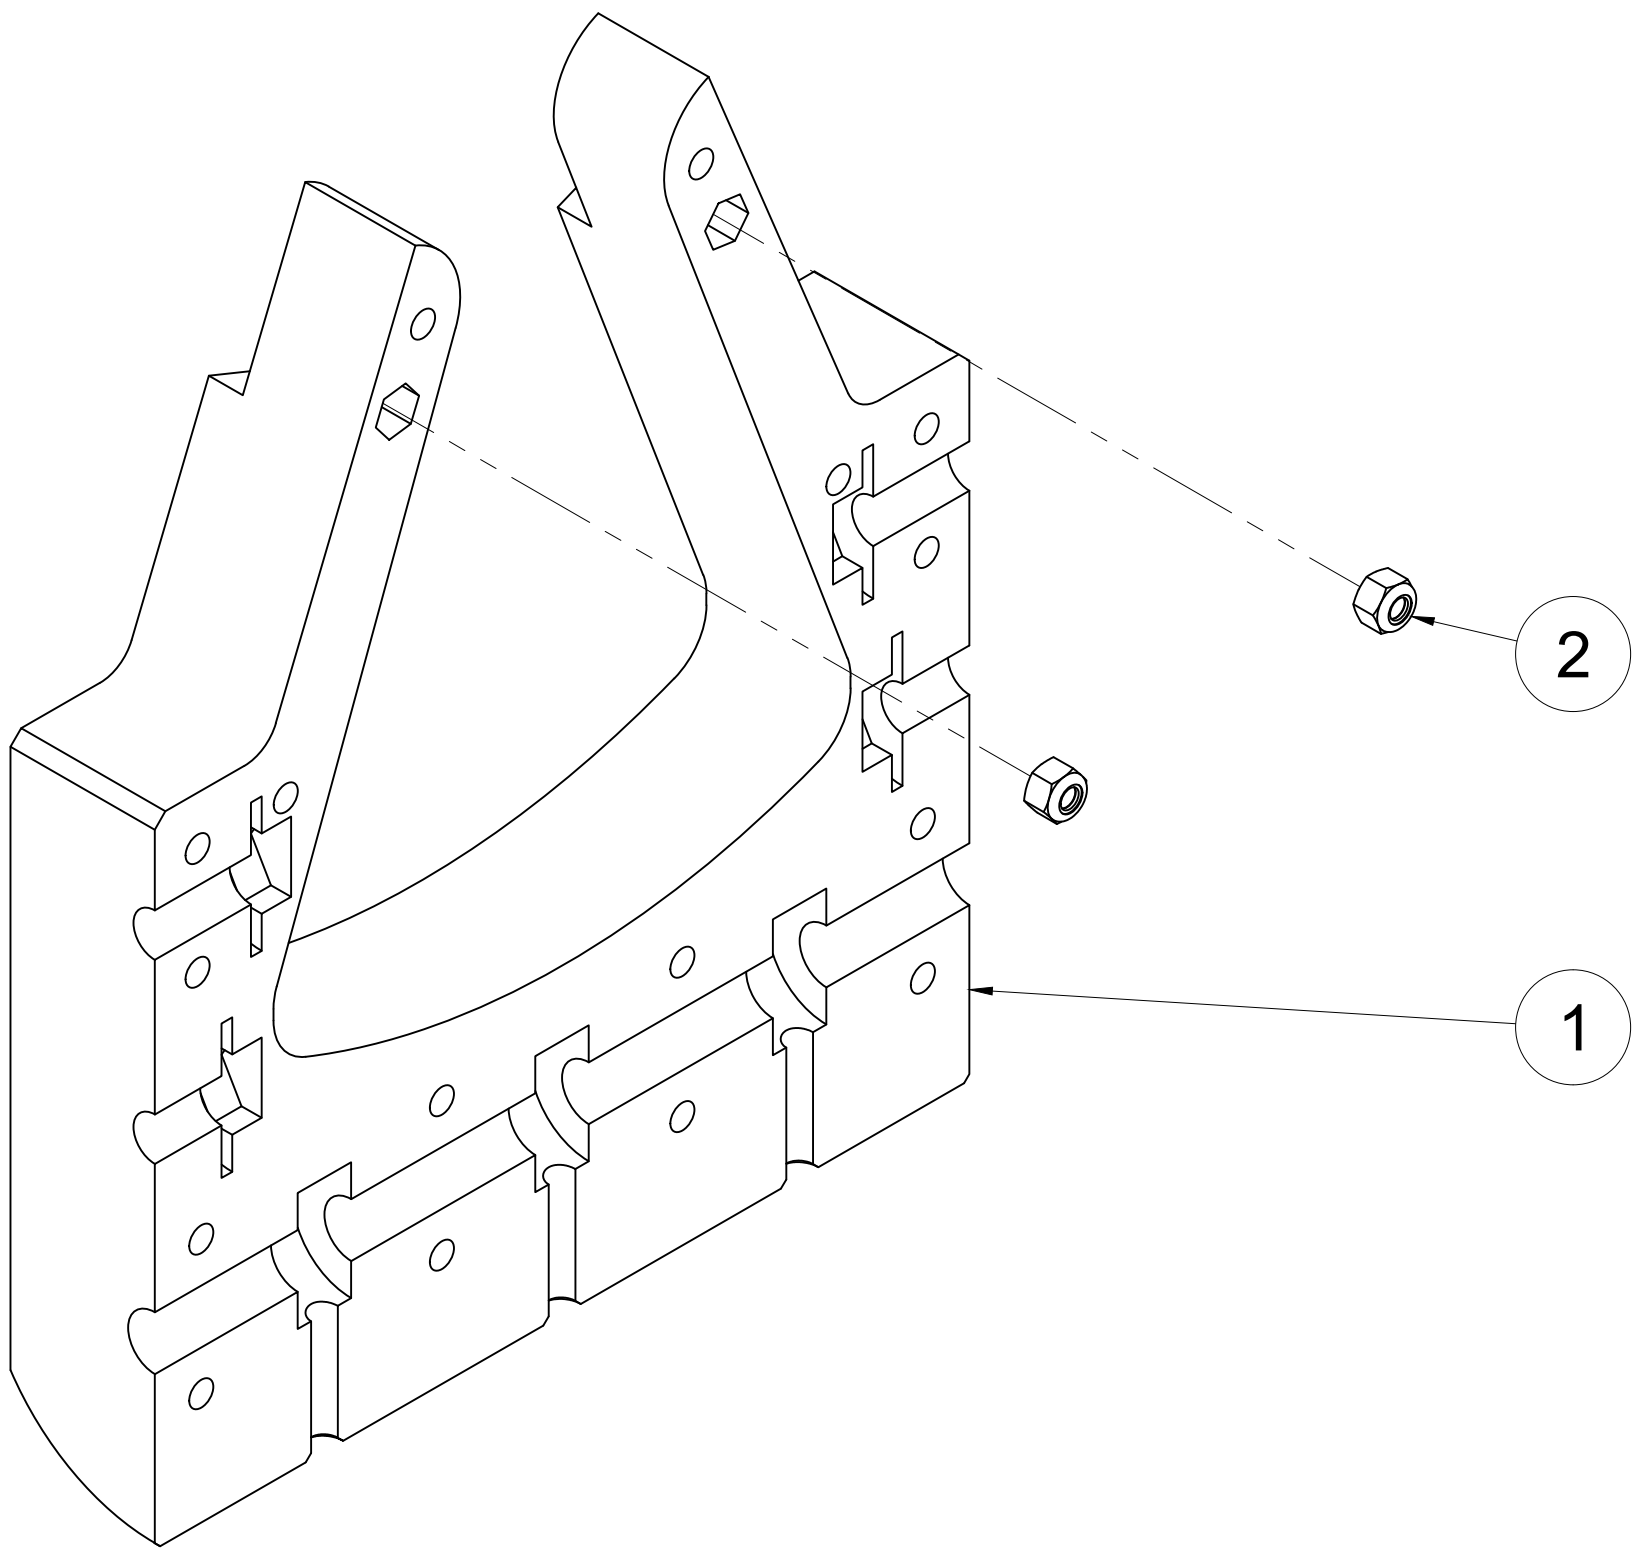

-102 ASSY
SCALE 1:1

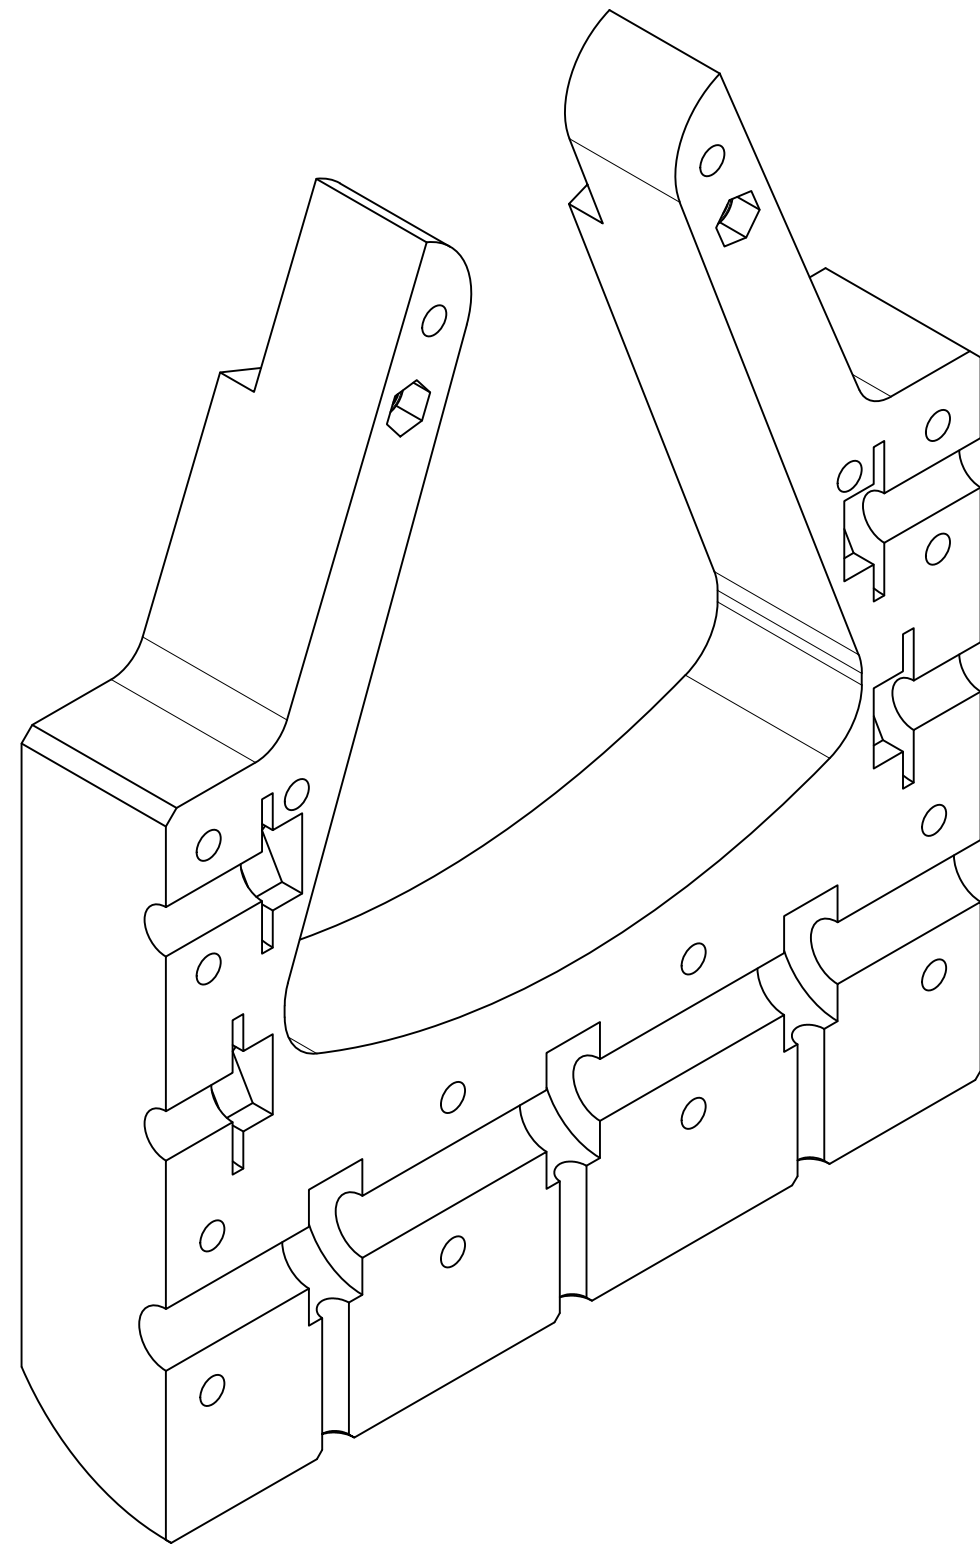

-102 ISO
SCALE 1:1


2	2	93625A150	Nyloc Hex Nut, M4 x 0.7 mm	SS
1	1	OH3A3-103	MAIN CASING A	PETG
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
PARTS LIST				





OPEN HORNET
<https://www.OpenHornet.com>

SIZE	DWG NO	REV
D	OH3A3-102	A
SCALE	SHEET 3/17	

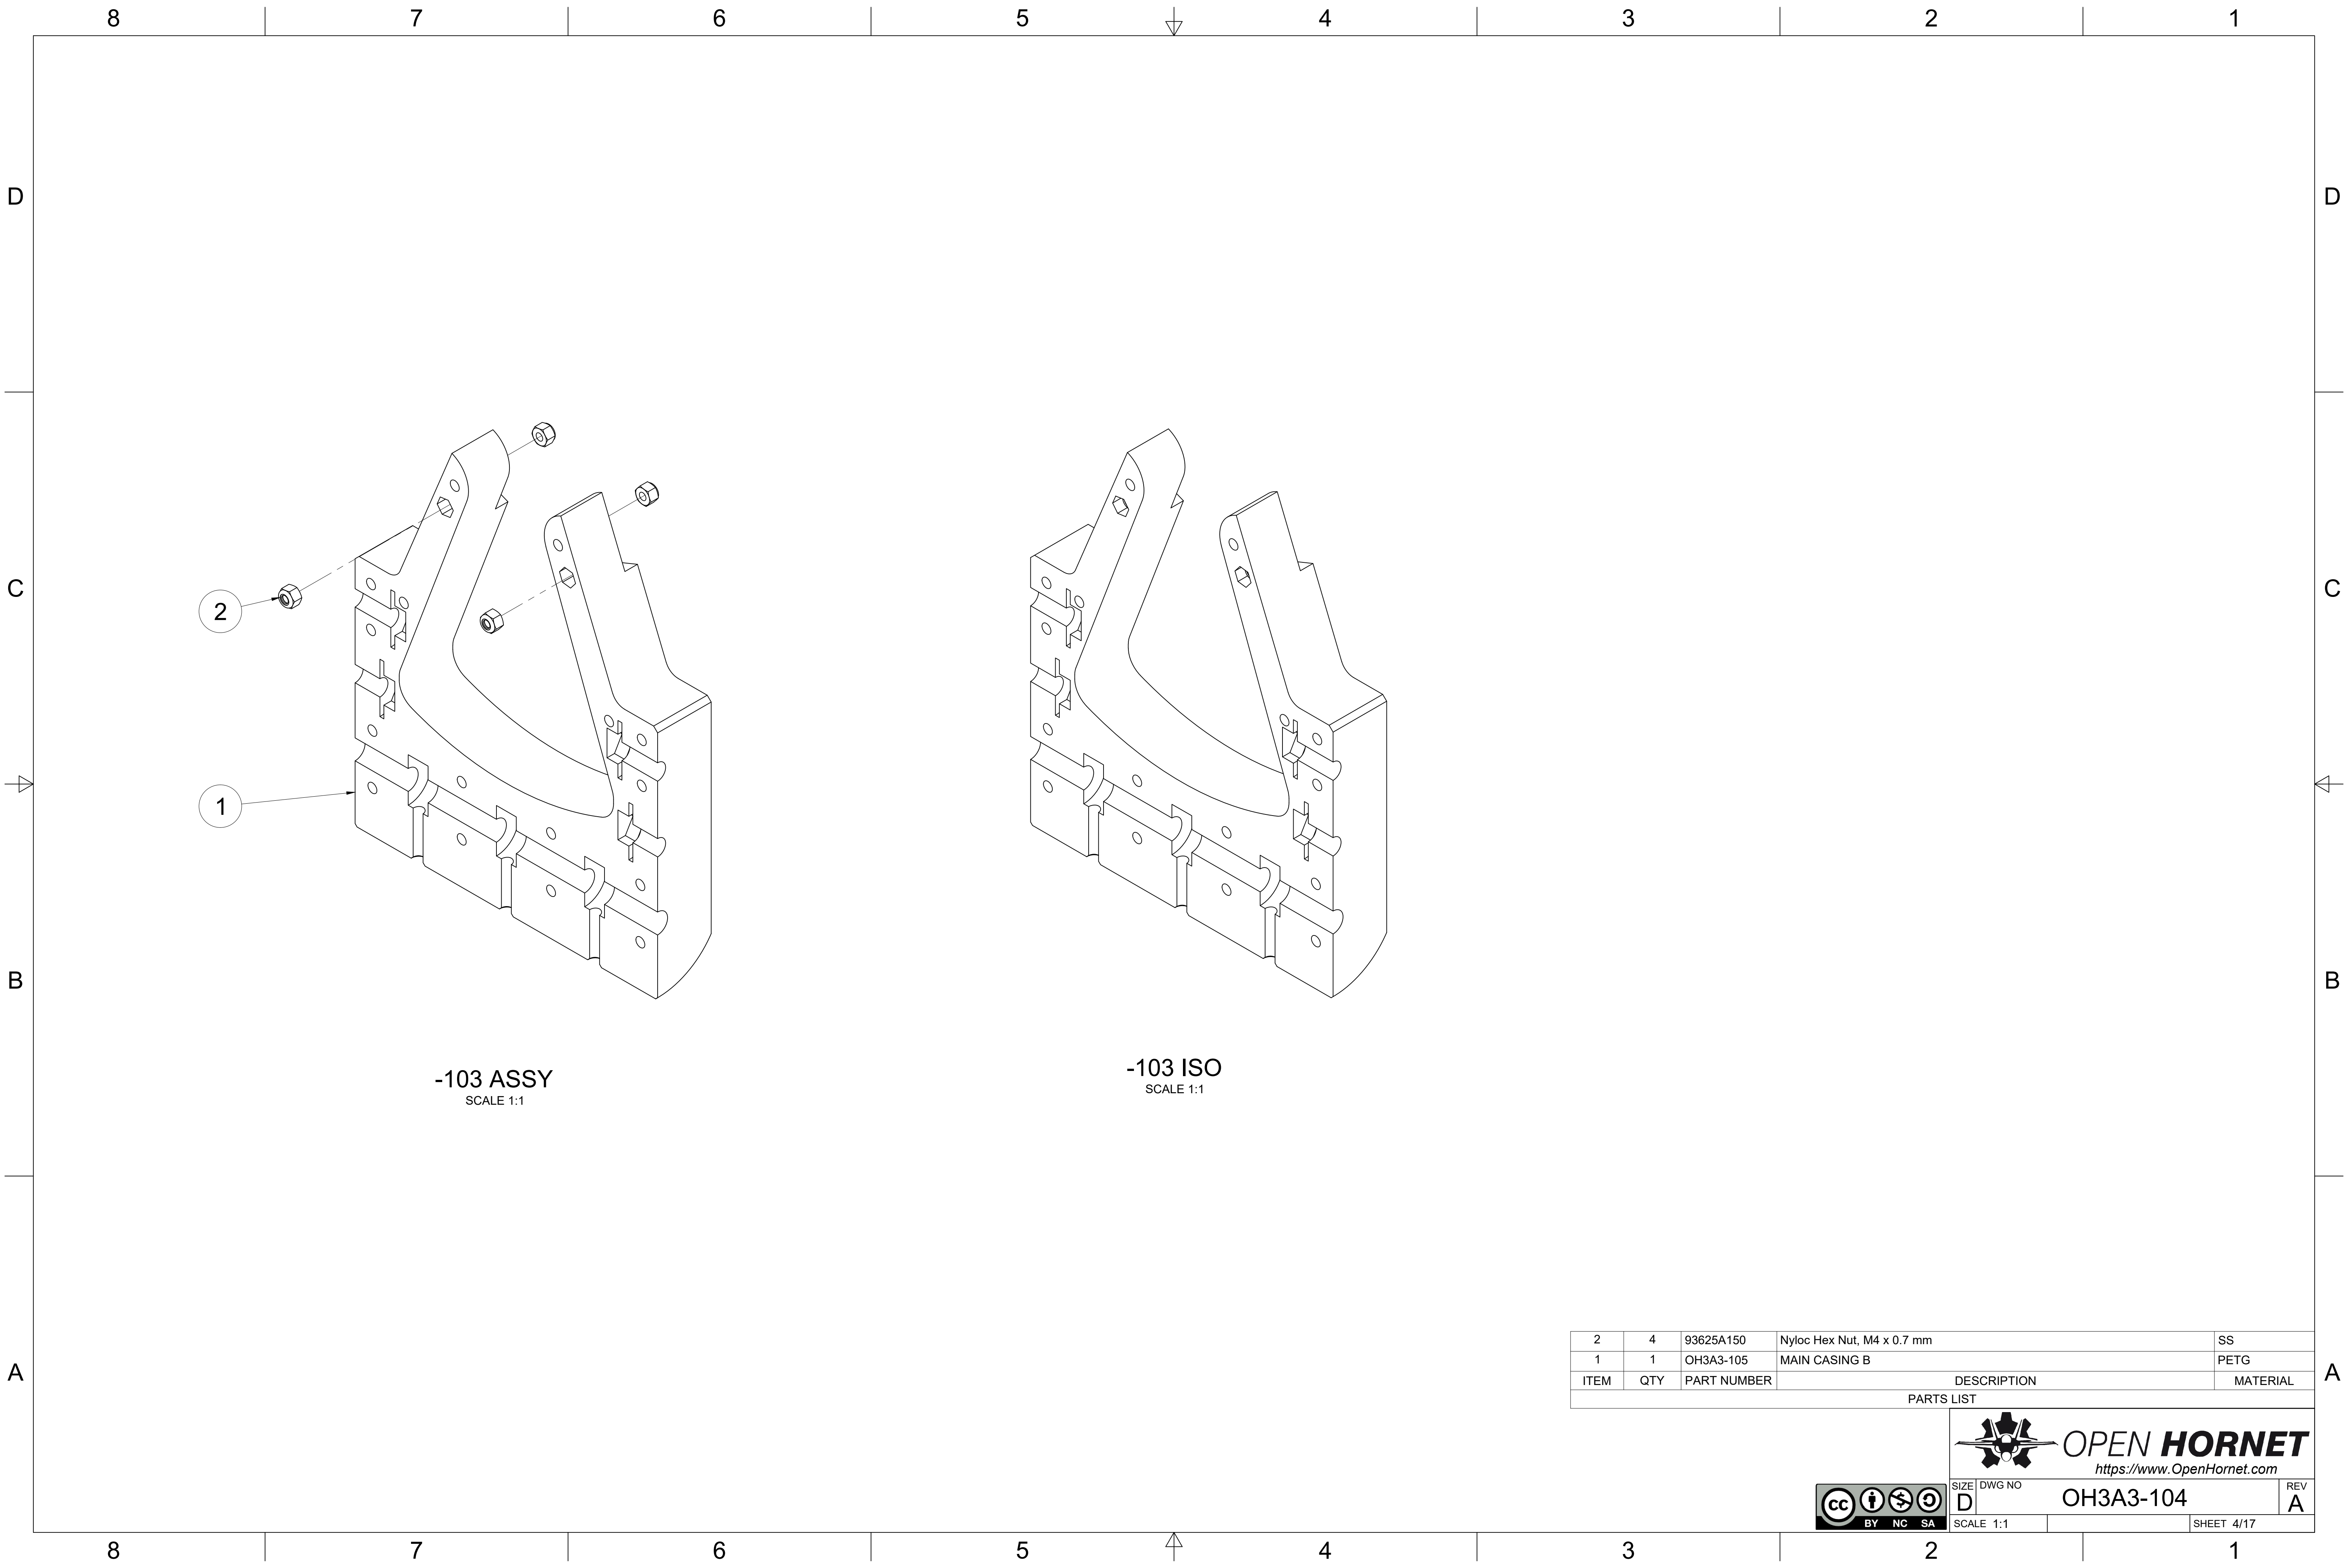

-103 ASSY
SCALE 1:1

-103 ISO
SCALE 1:1


2	4	93625A150	Nyloc Hex Nut, M4 x 0.7 mm	SS
1	1	OH3A3-105	MAIN CASING B	PETG
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
PARTS LIST				





OPEN HORNET
<https://www.OpenHornet.com>

SIZE	DWG NO	REV
D	OH3A3-104	A
SCALE 1:1		SHEET 4/17

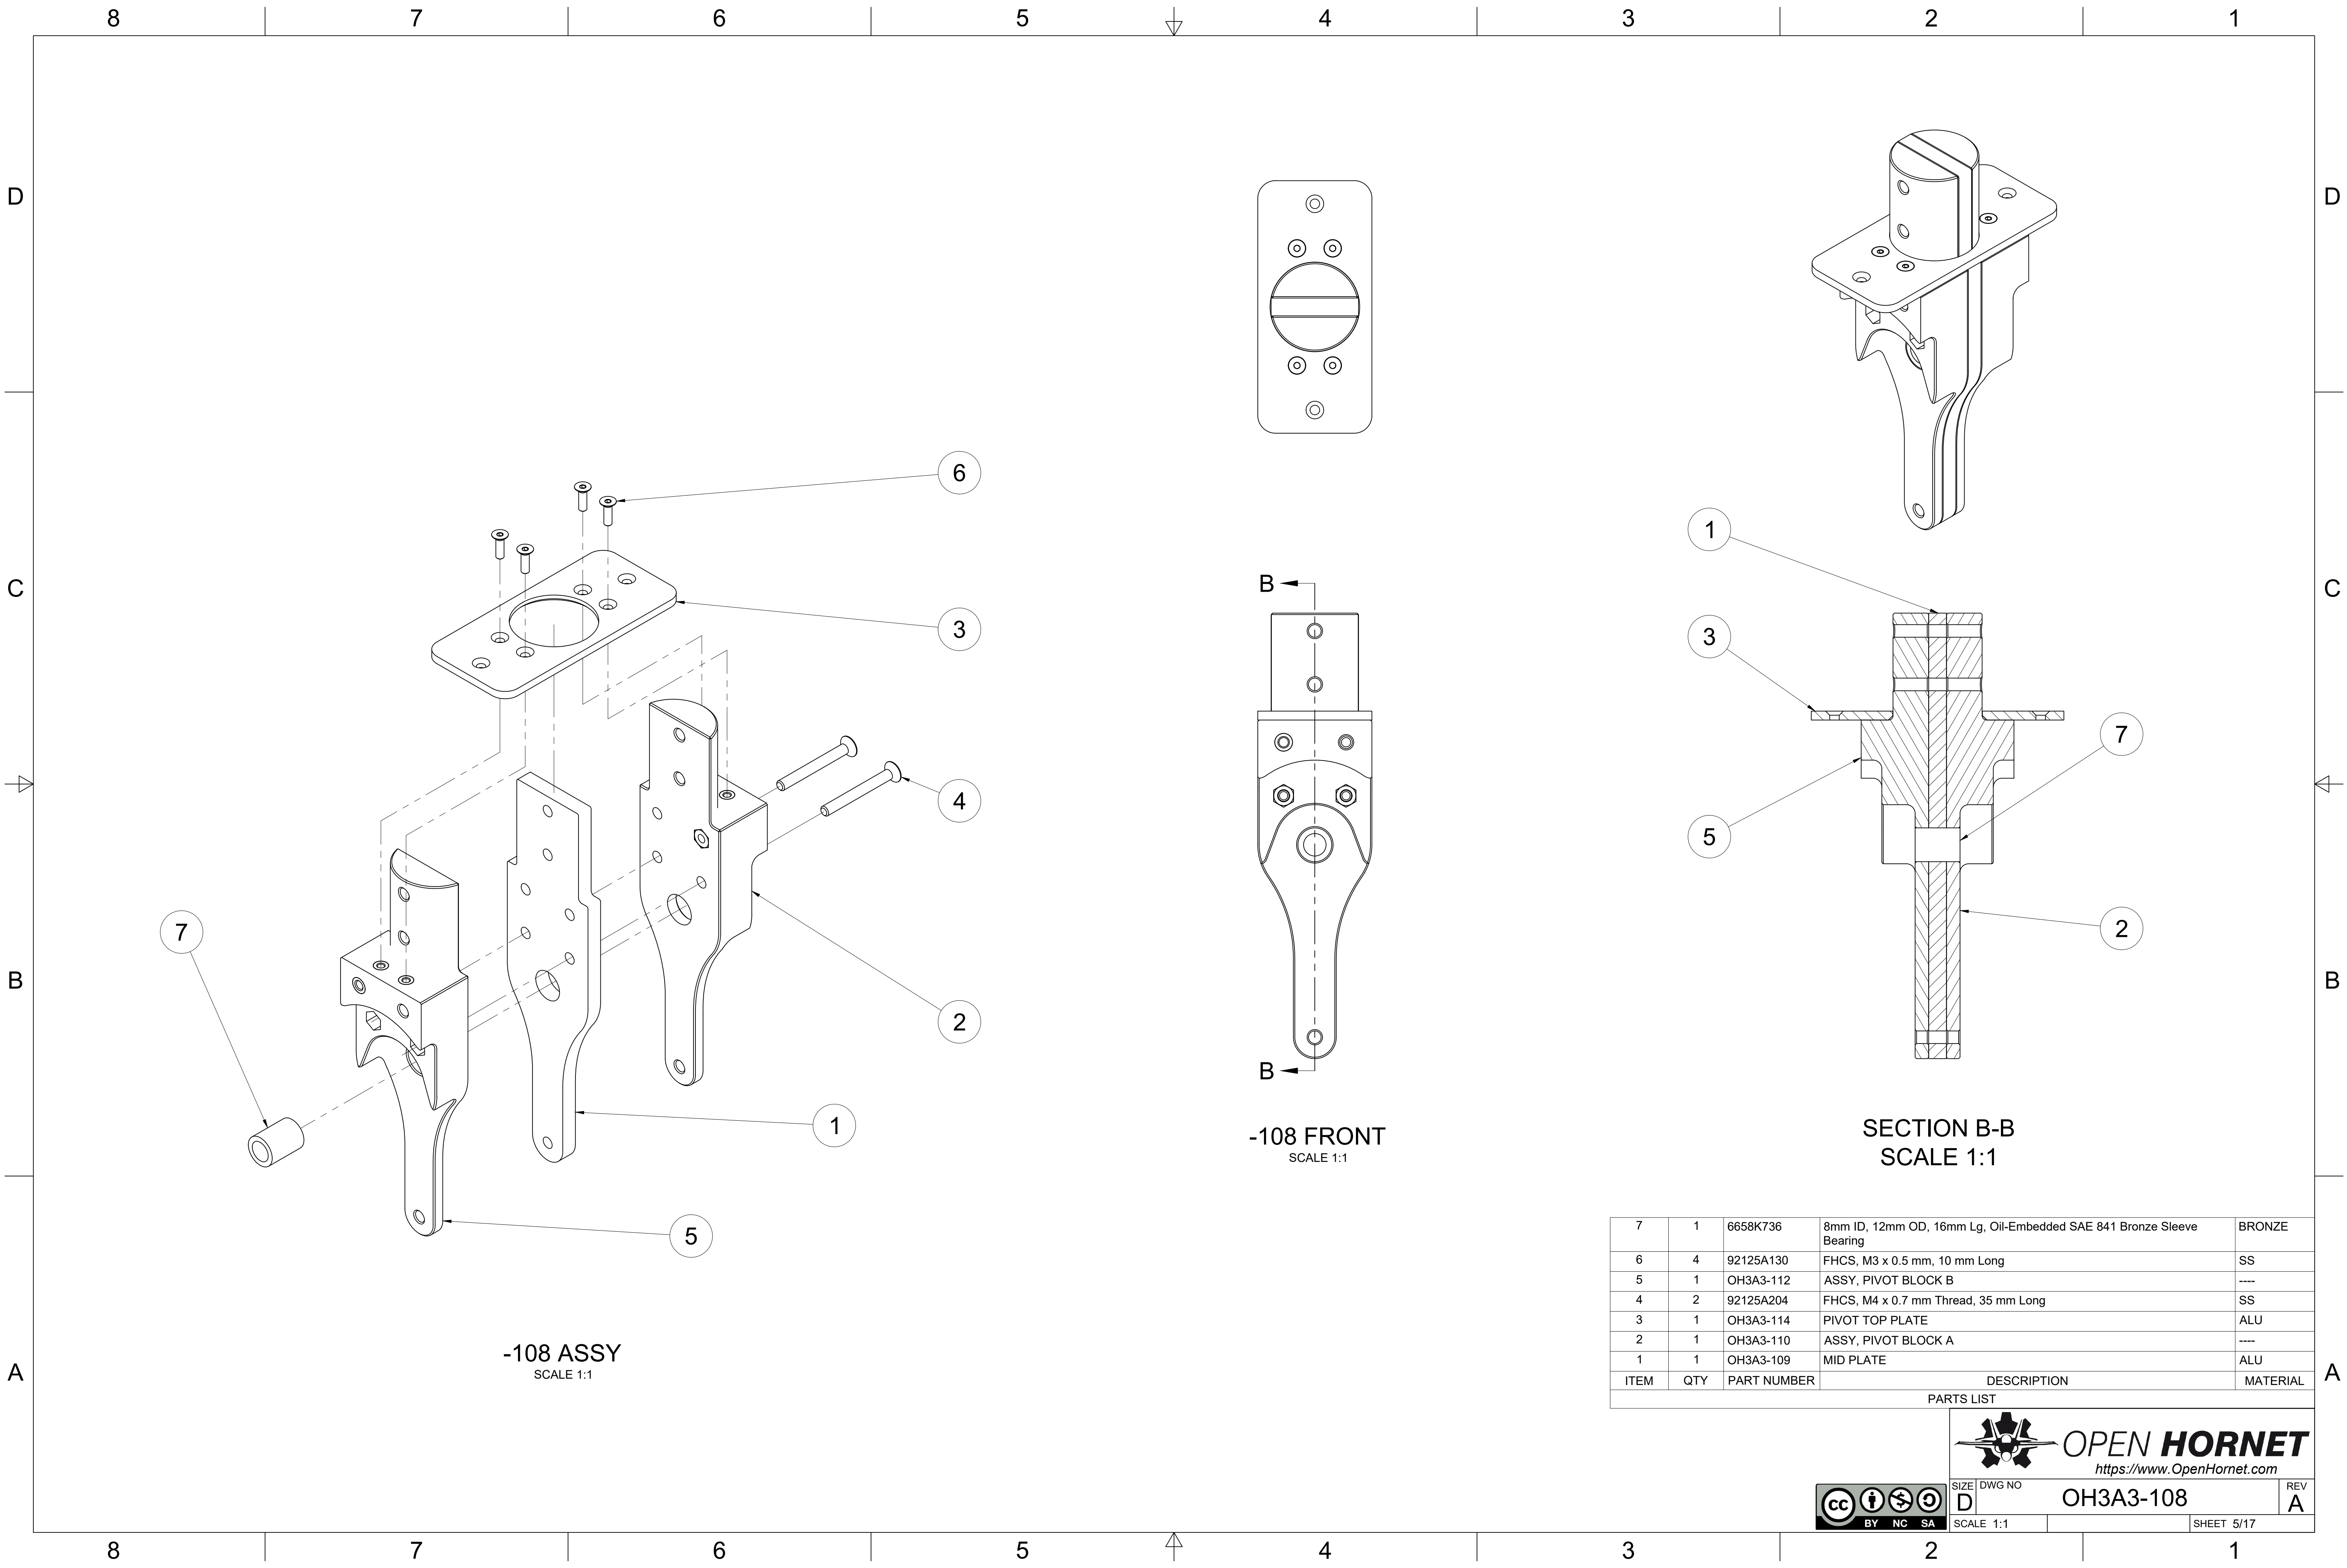


7	1	6658K736	8mm ID, 12mm OD, 16mm Lg, Oil-Embedded SAE 841 Bronze Sleeve Bearing	BRONZE
6	4	92125A130	FHCS, M3 x 0.5 mm, 10 mm Long	SS
5	1	OH3A3-112	ASSY, PIVOT BLOCK B	----
4	2	92125A204	FHCS, M4 x 0.7 mm Thread, 35 mm Long	SS
3	1	OH3A3-114	PIVOT TOP PLATE	ALU
2	1	OH3A3-110	ASSY, PIVOT BLOCK A	----
1	1	OH3A3-109	MID PLATE	ALU
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
PARTS LIST				








OPEN HORNET
<https://www.OpenHornet.com>




SIZE	D	DWG NO	OH3A3-108	REV	A
SCALE	1:1				SHEET 5/17

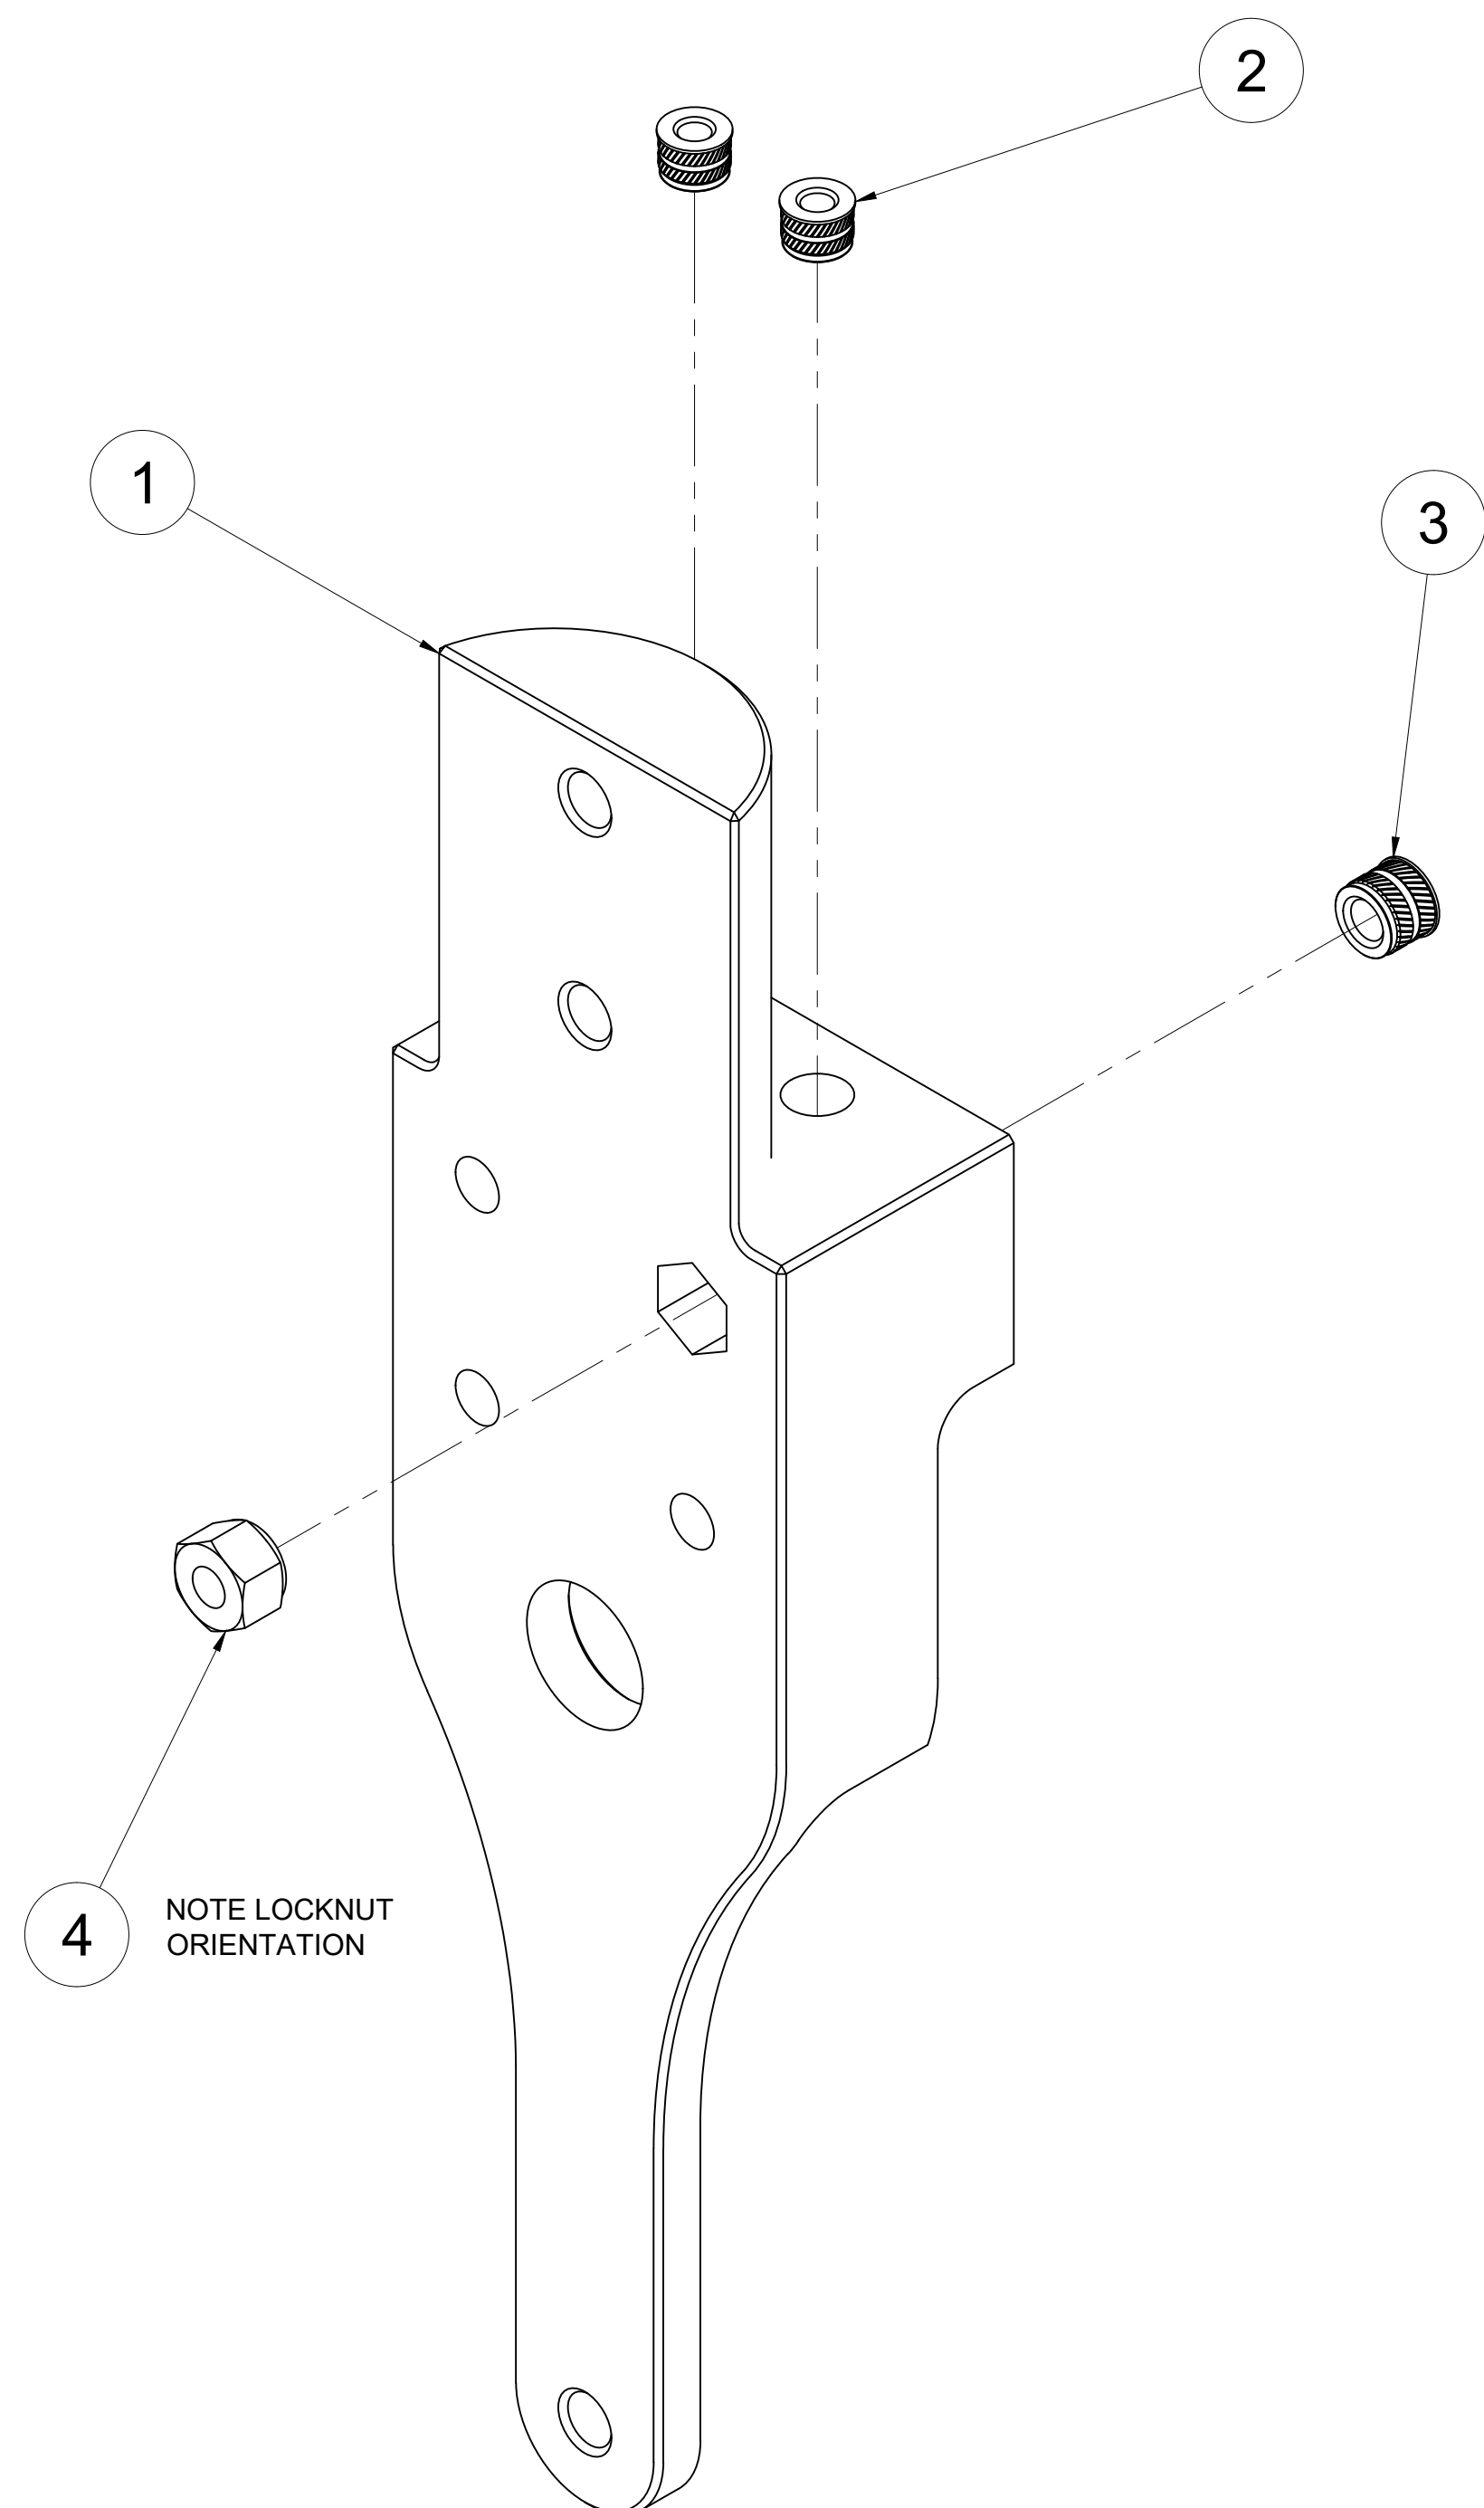

-110 ASSY
SCALE 2:1

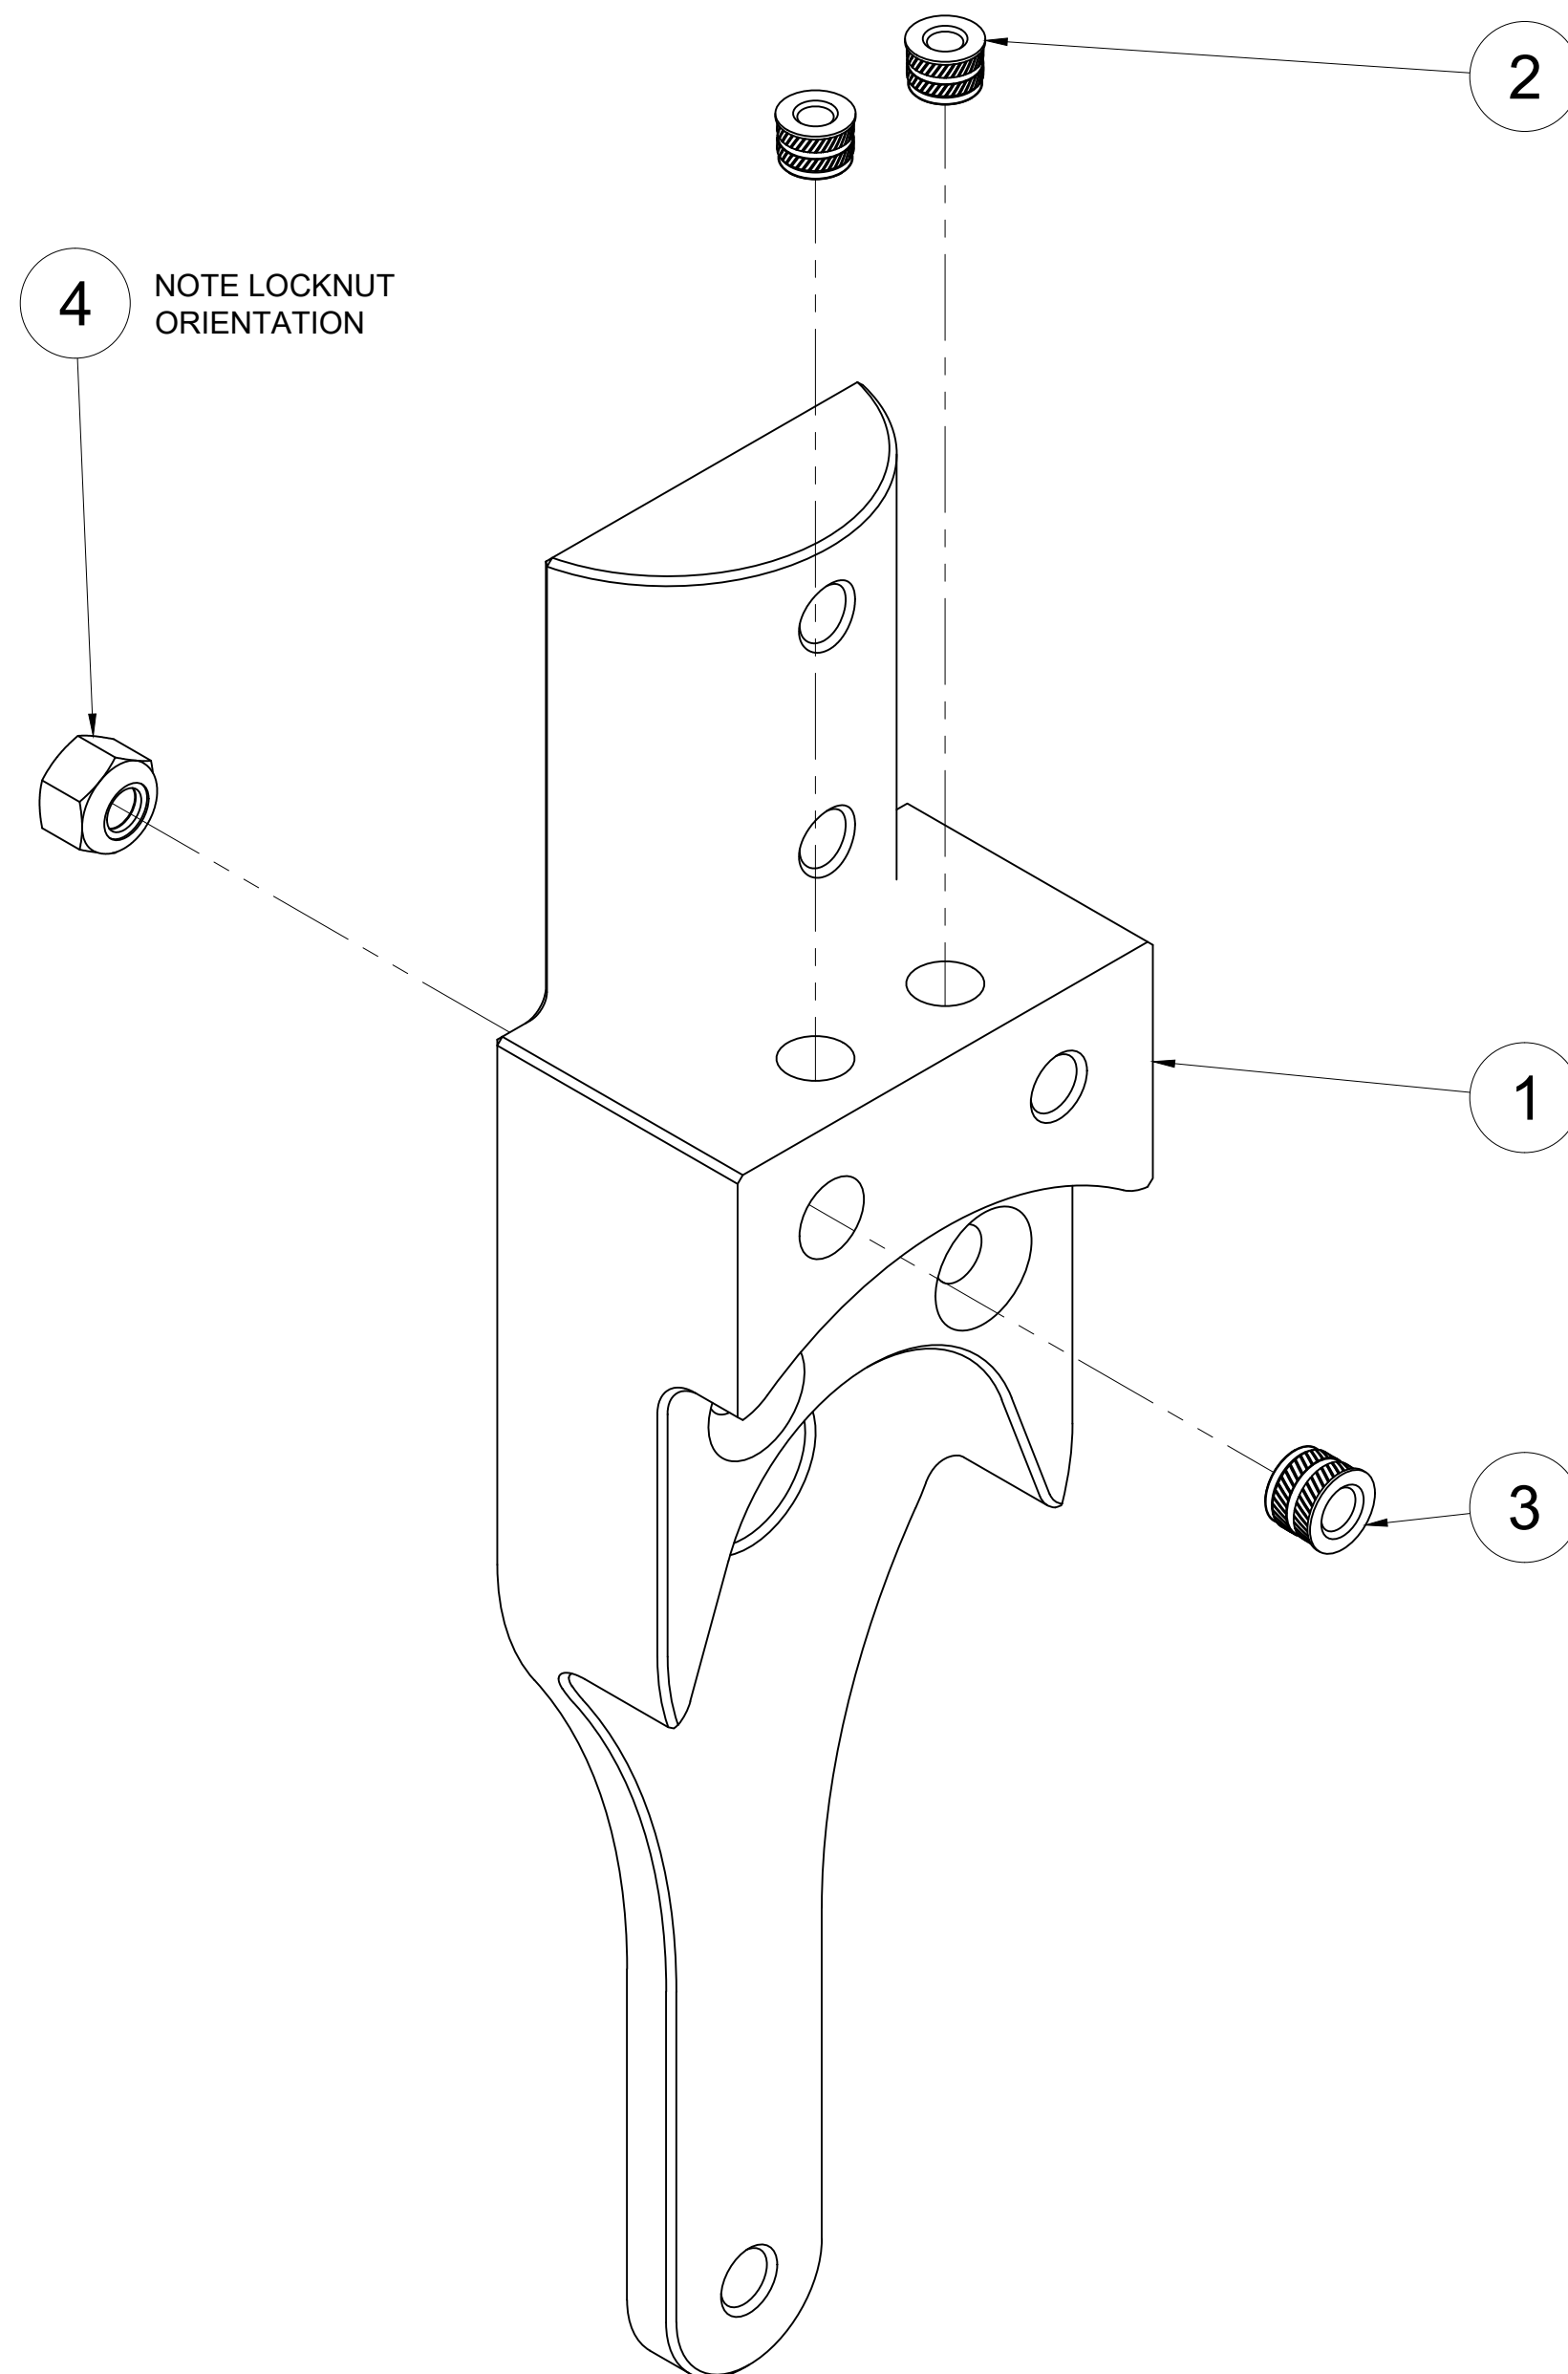

-110 ASSY
SCALE 2:1

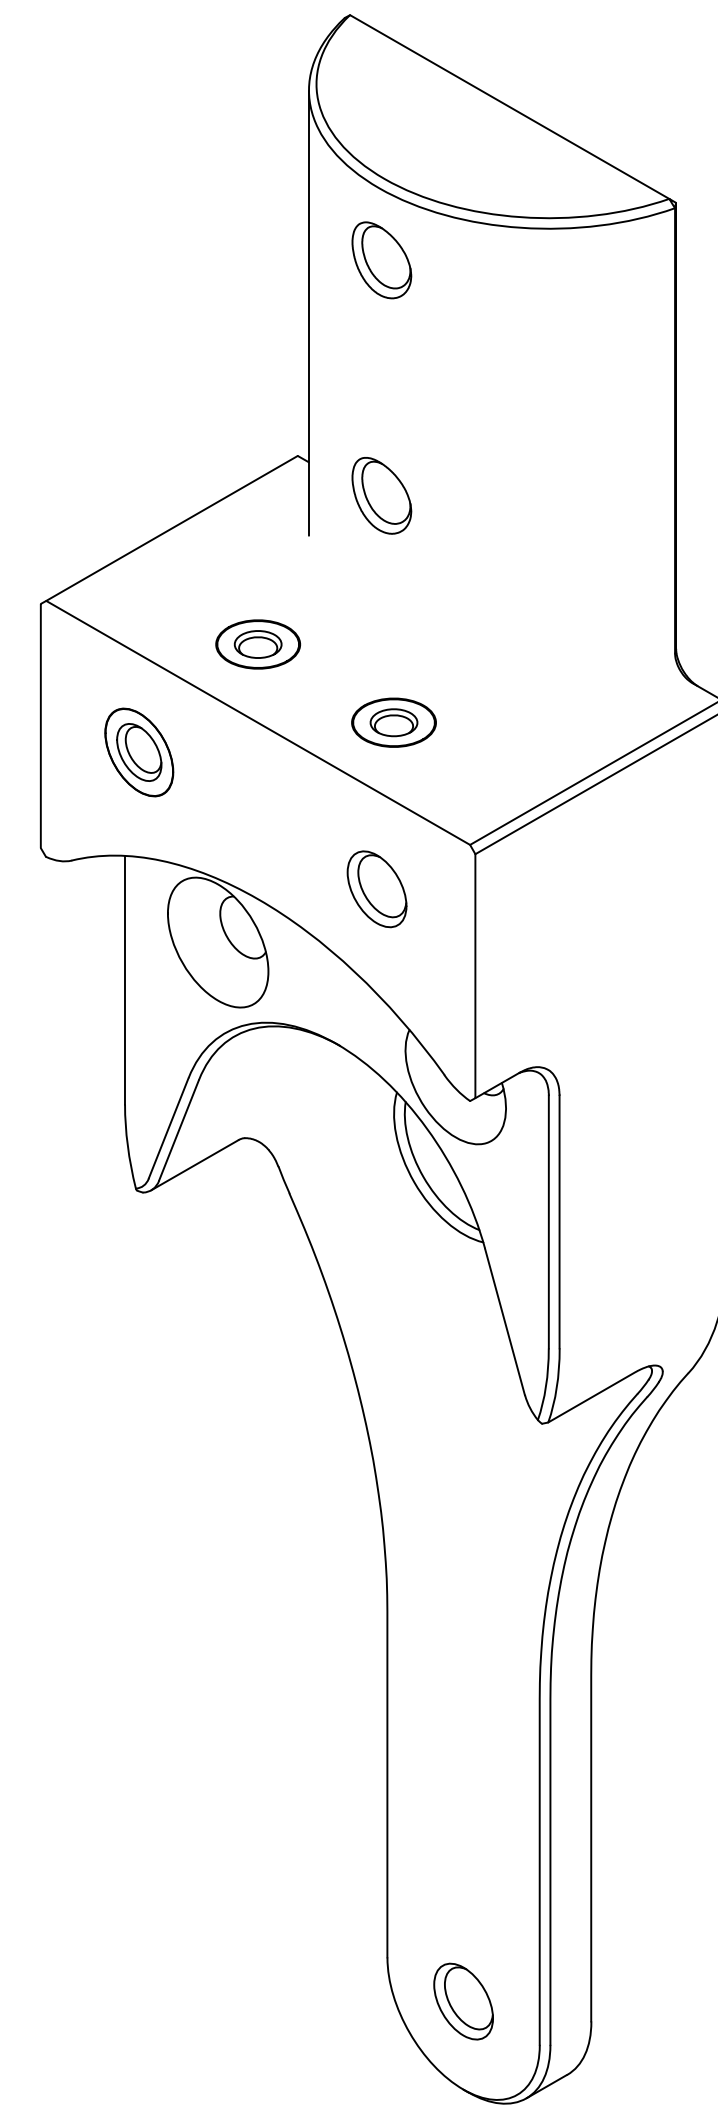

-110 ISO
SCALE 2:1


4	1	93625A150	Nyloc Hex Nut, M4 x 0.7 mm	SS
3	1	94180A351	INSERT, M4 X .7MM, BRASS, FOR PLASTICS	BRS
2	2	94180A331	INSERT, HEAT-SET, M3 X 0.5 X 3.8, BRASS	BRS
1	1	OH3A3-111	PIVOT BLOCK A	PETG
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
PARTS LIST				



OPEN HORNET
<https://www.OpenHornet.com>

SIZE D	DWG NO OH3A3-110	REV A
SCALE		SHEET 6/17



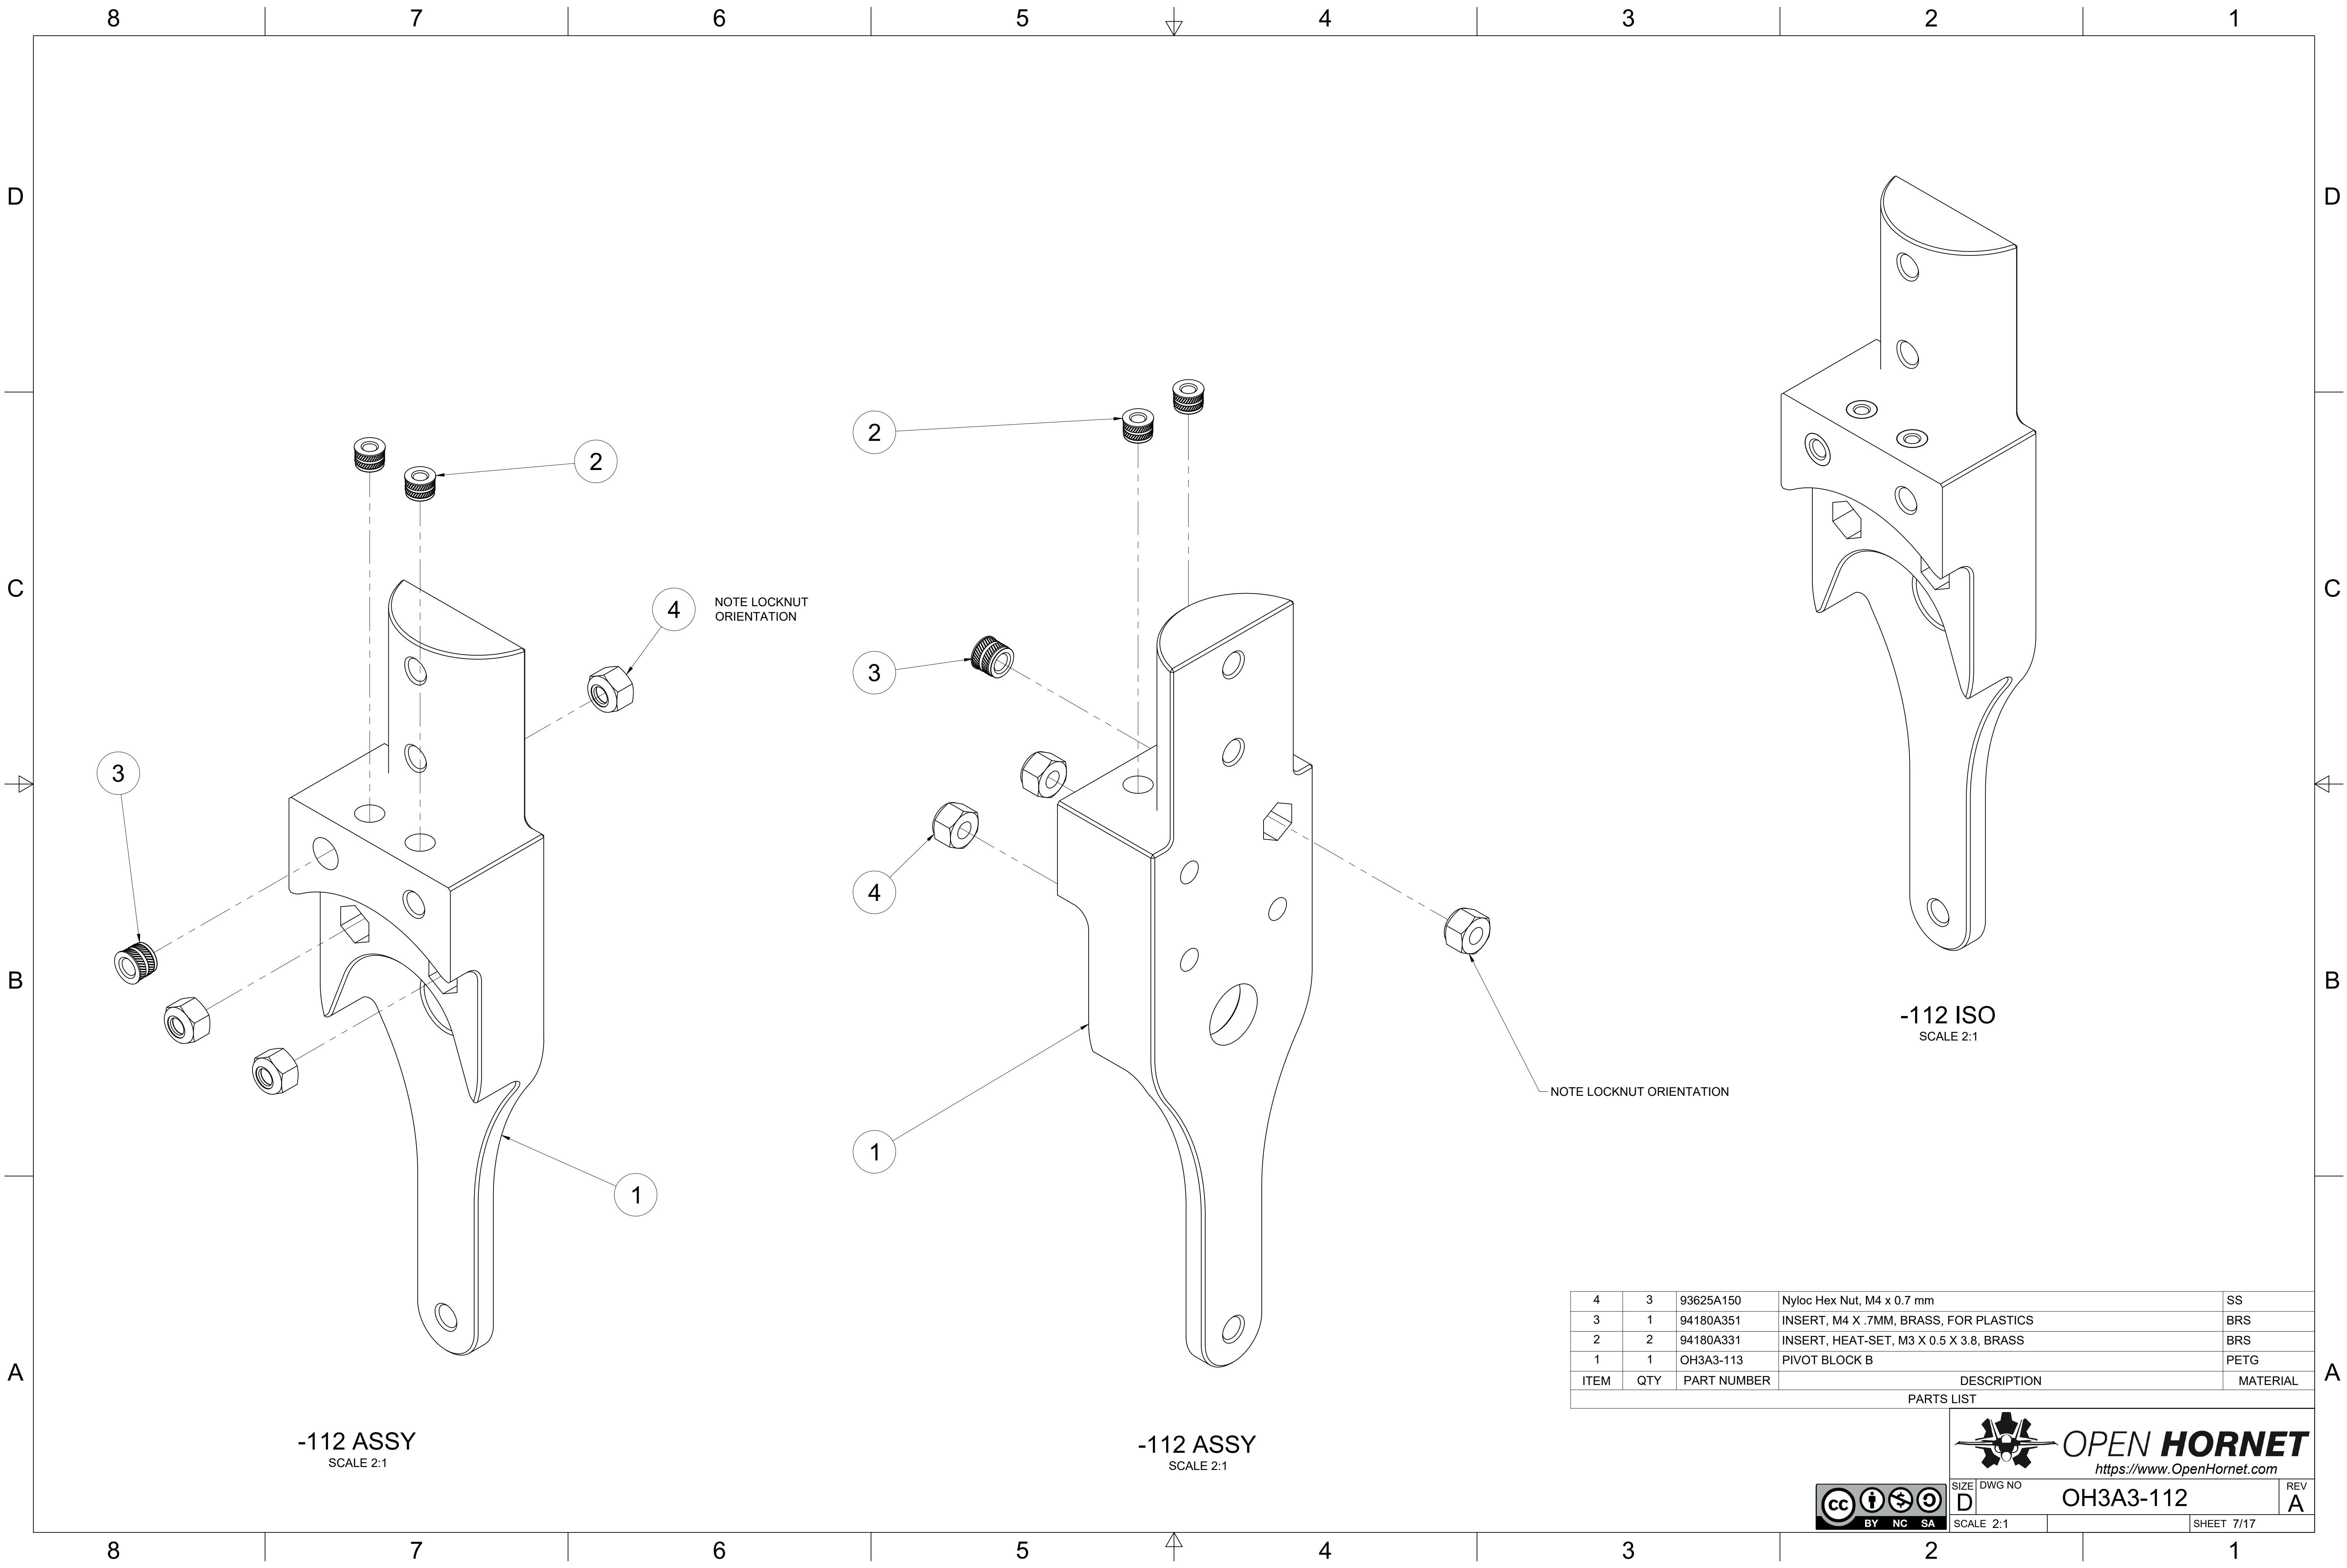


SIZE	D	DWG NO	OH3A3-112	REV	A
SCALE	2:1			SHEET	7/17

D


C

B

A

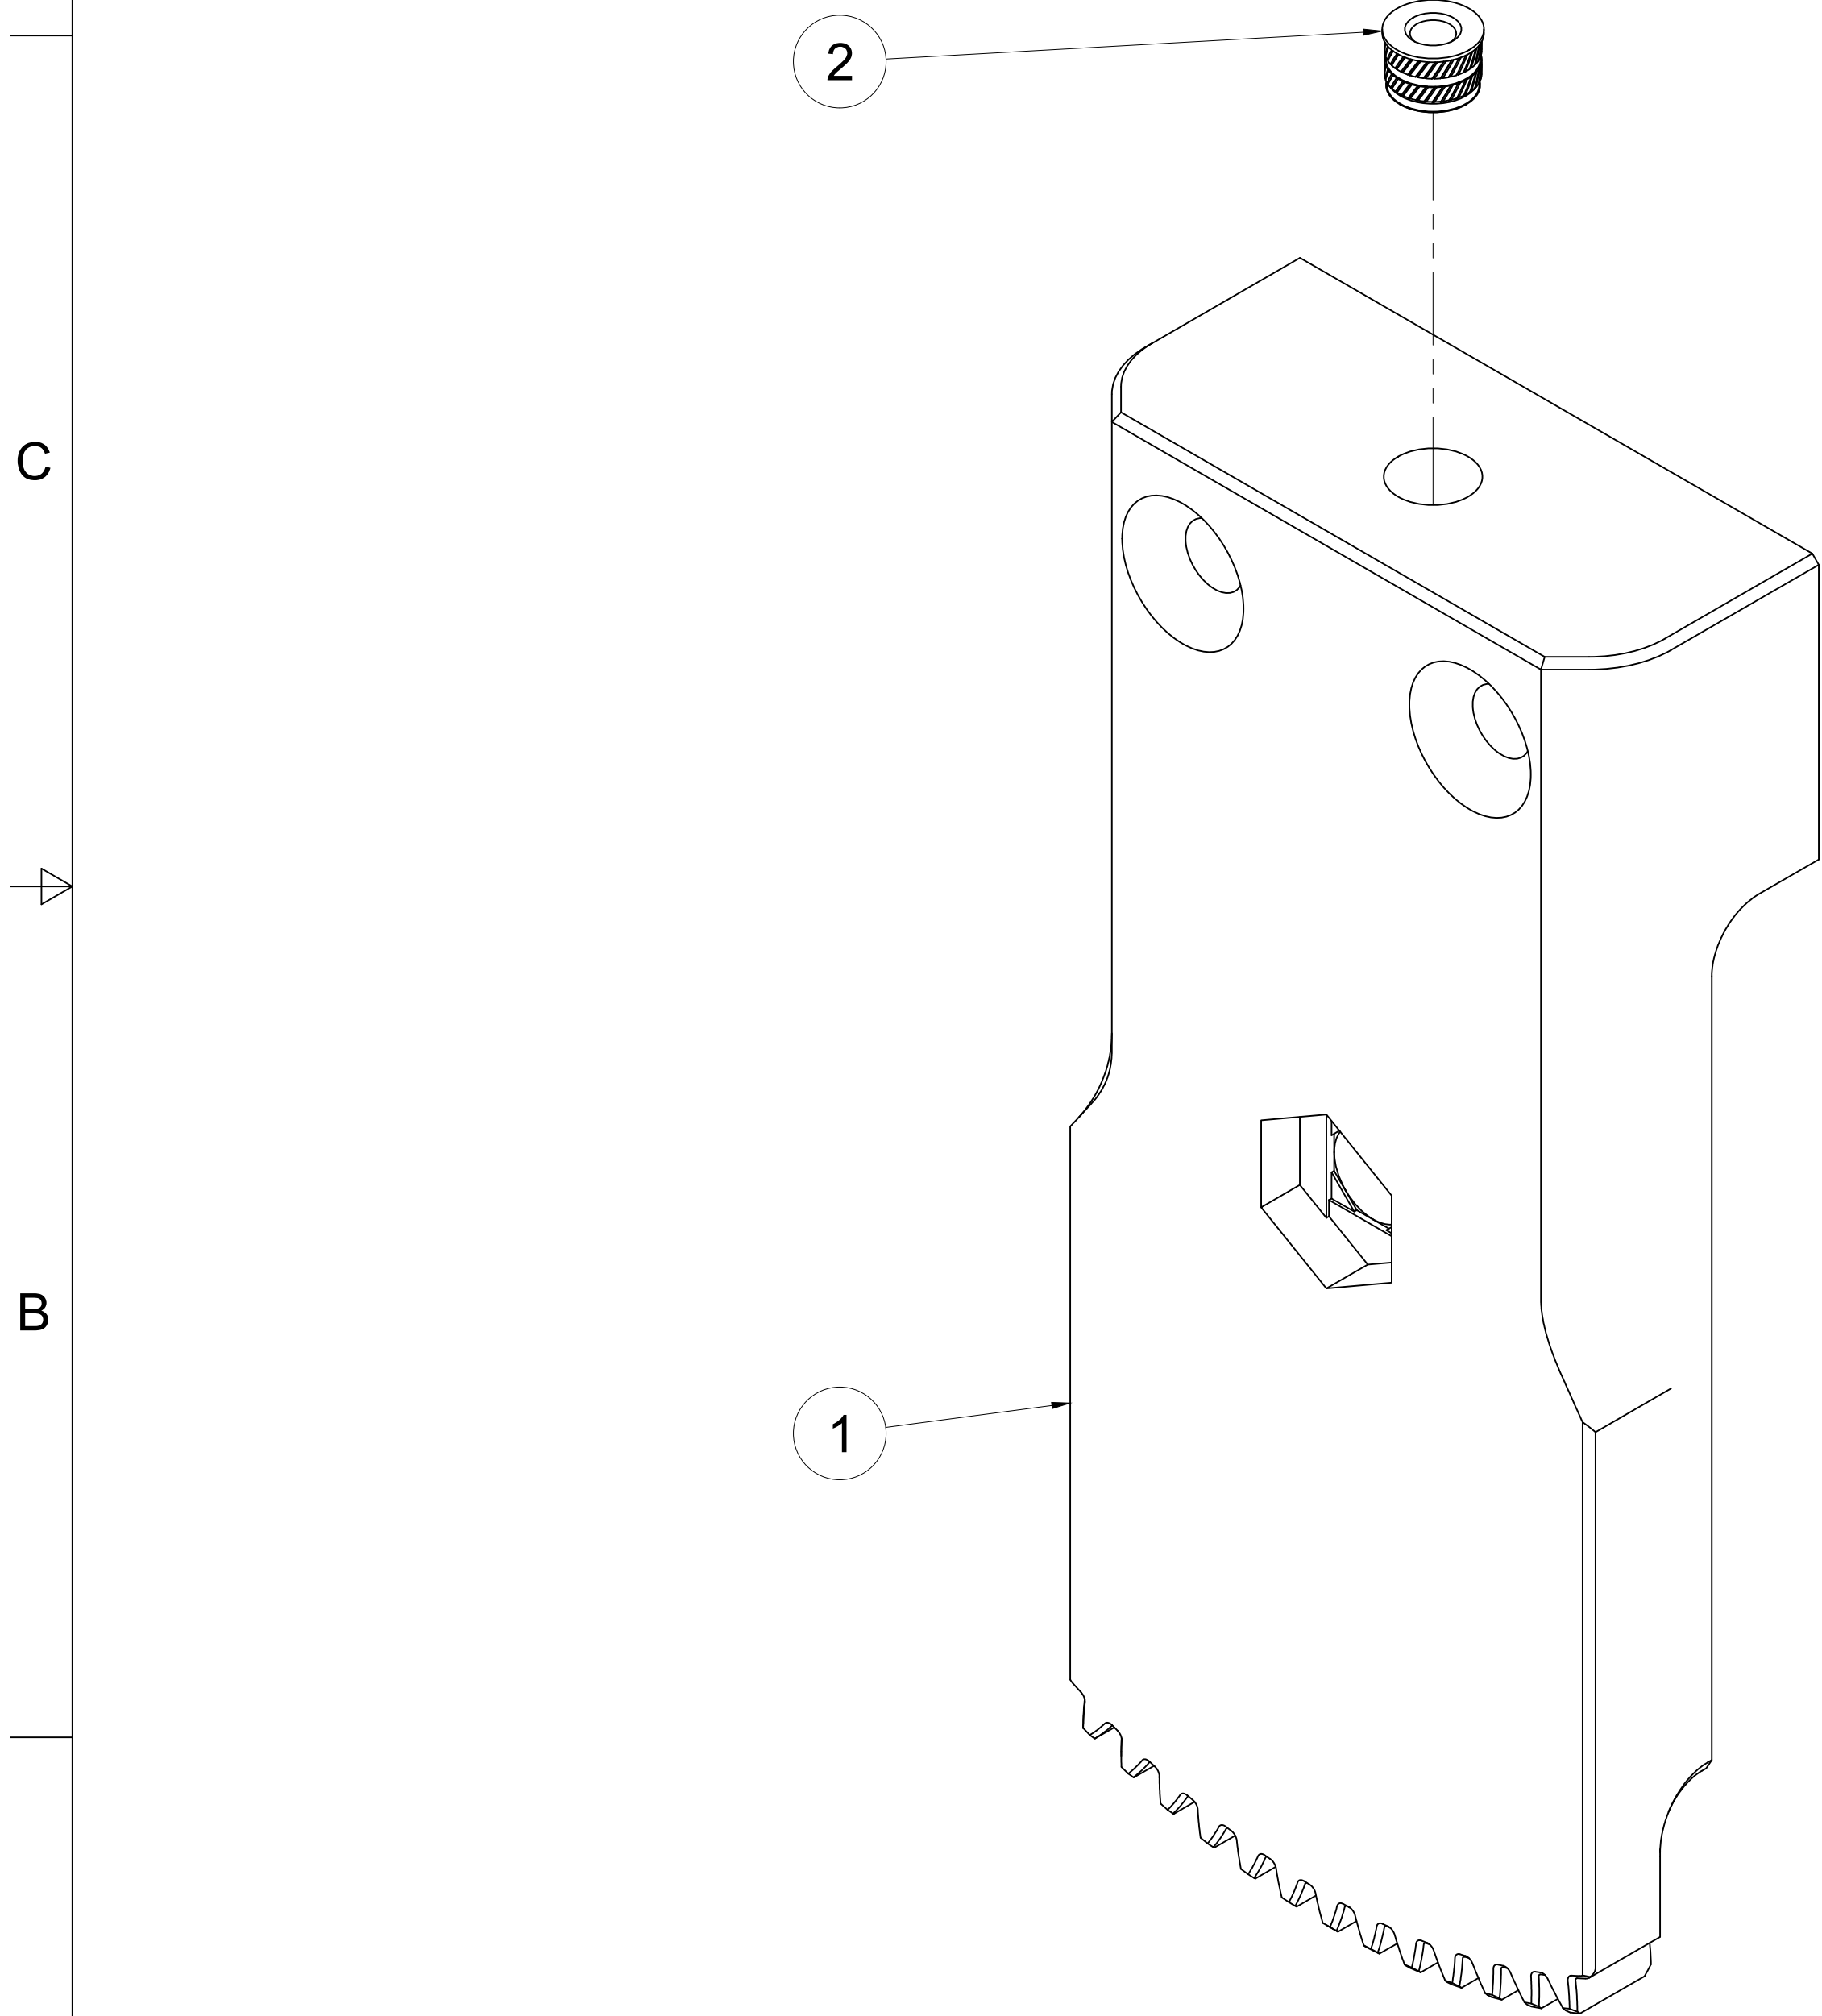

-115 ASSY
SCALE 3:1

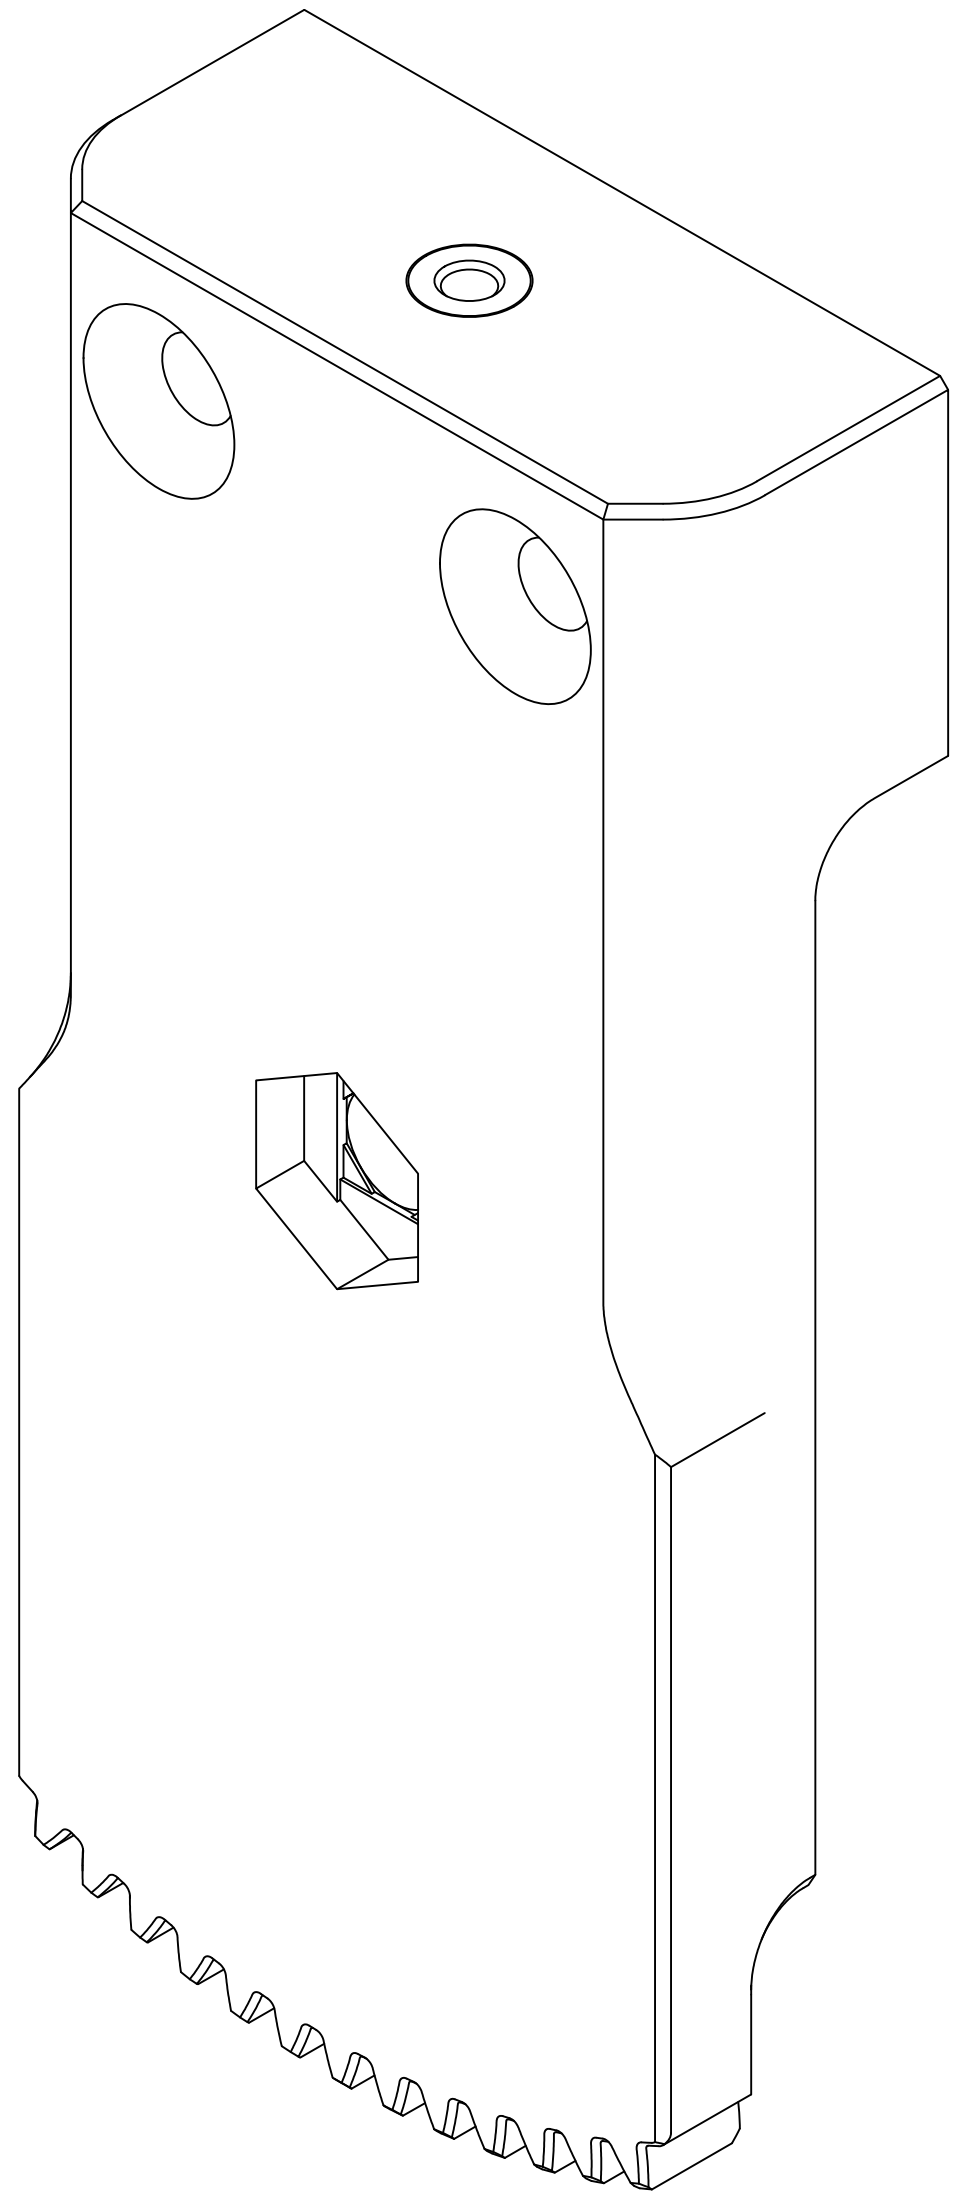


-115 ISO
SCALE 3:1

2	1	94180A331	INSERT, HEAT-SET, M3 X 0.5 X 3.8, BRASS	BRS
1	1	OH3A3-116	ROLL DAMPER ARM A	PETG
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL

PARTS LIST



SIZE	DWG NO	REV
D	OH3A3-115	A
SCALE 3:1		SHEET 8/17

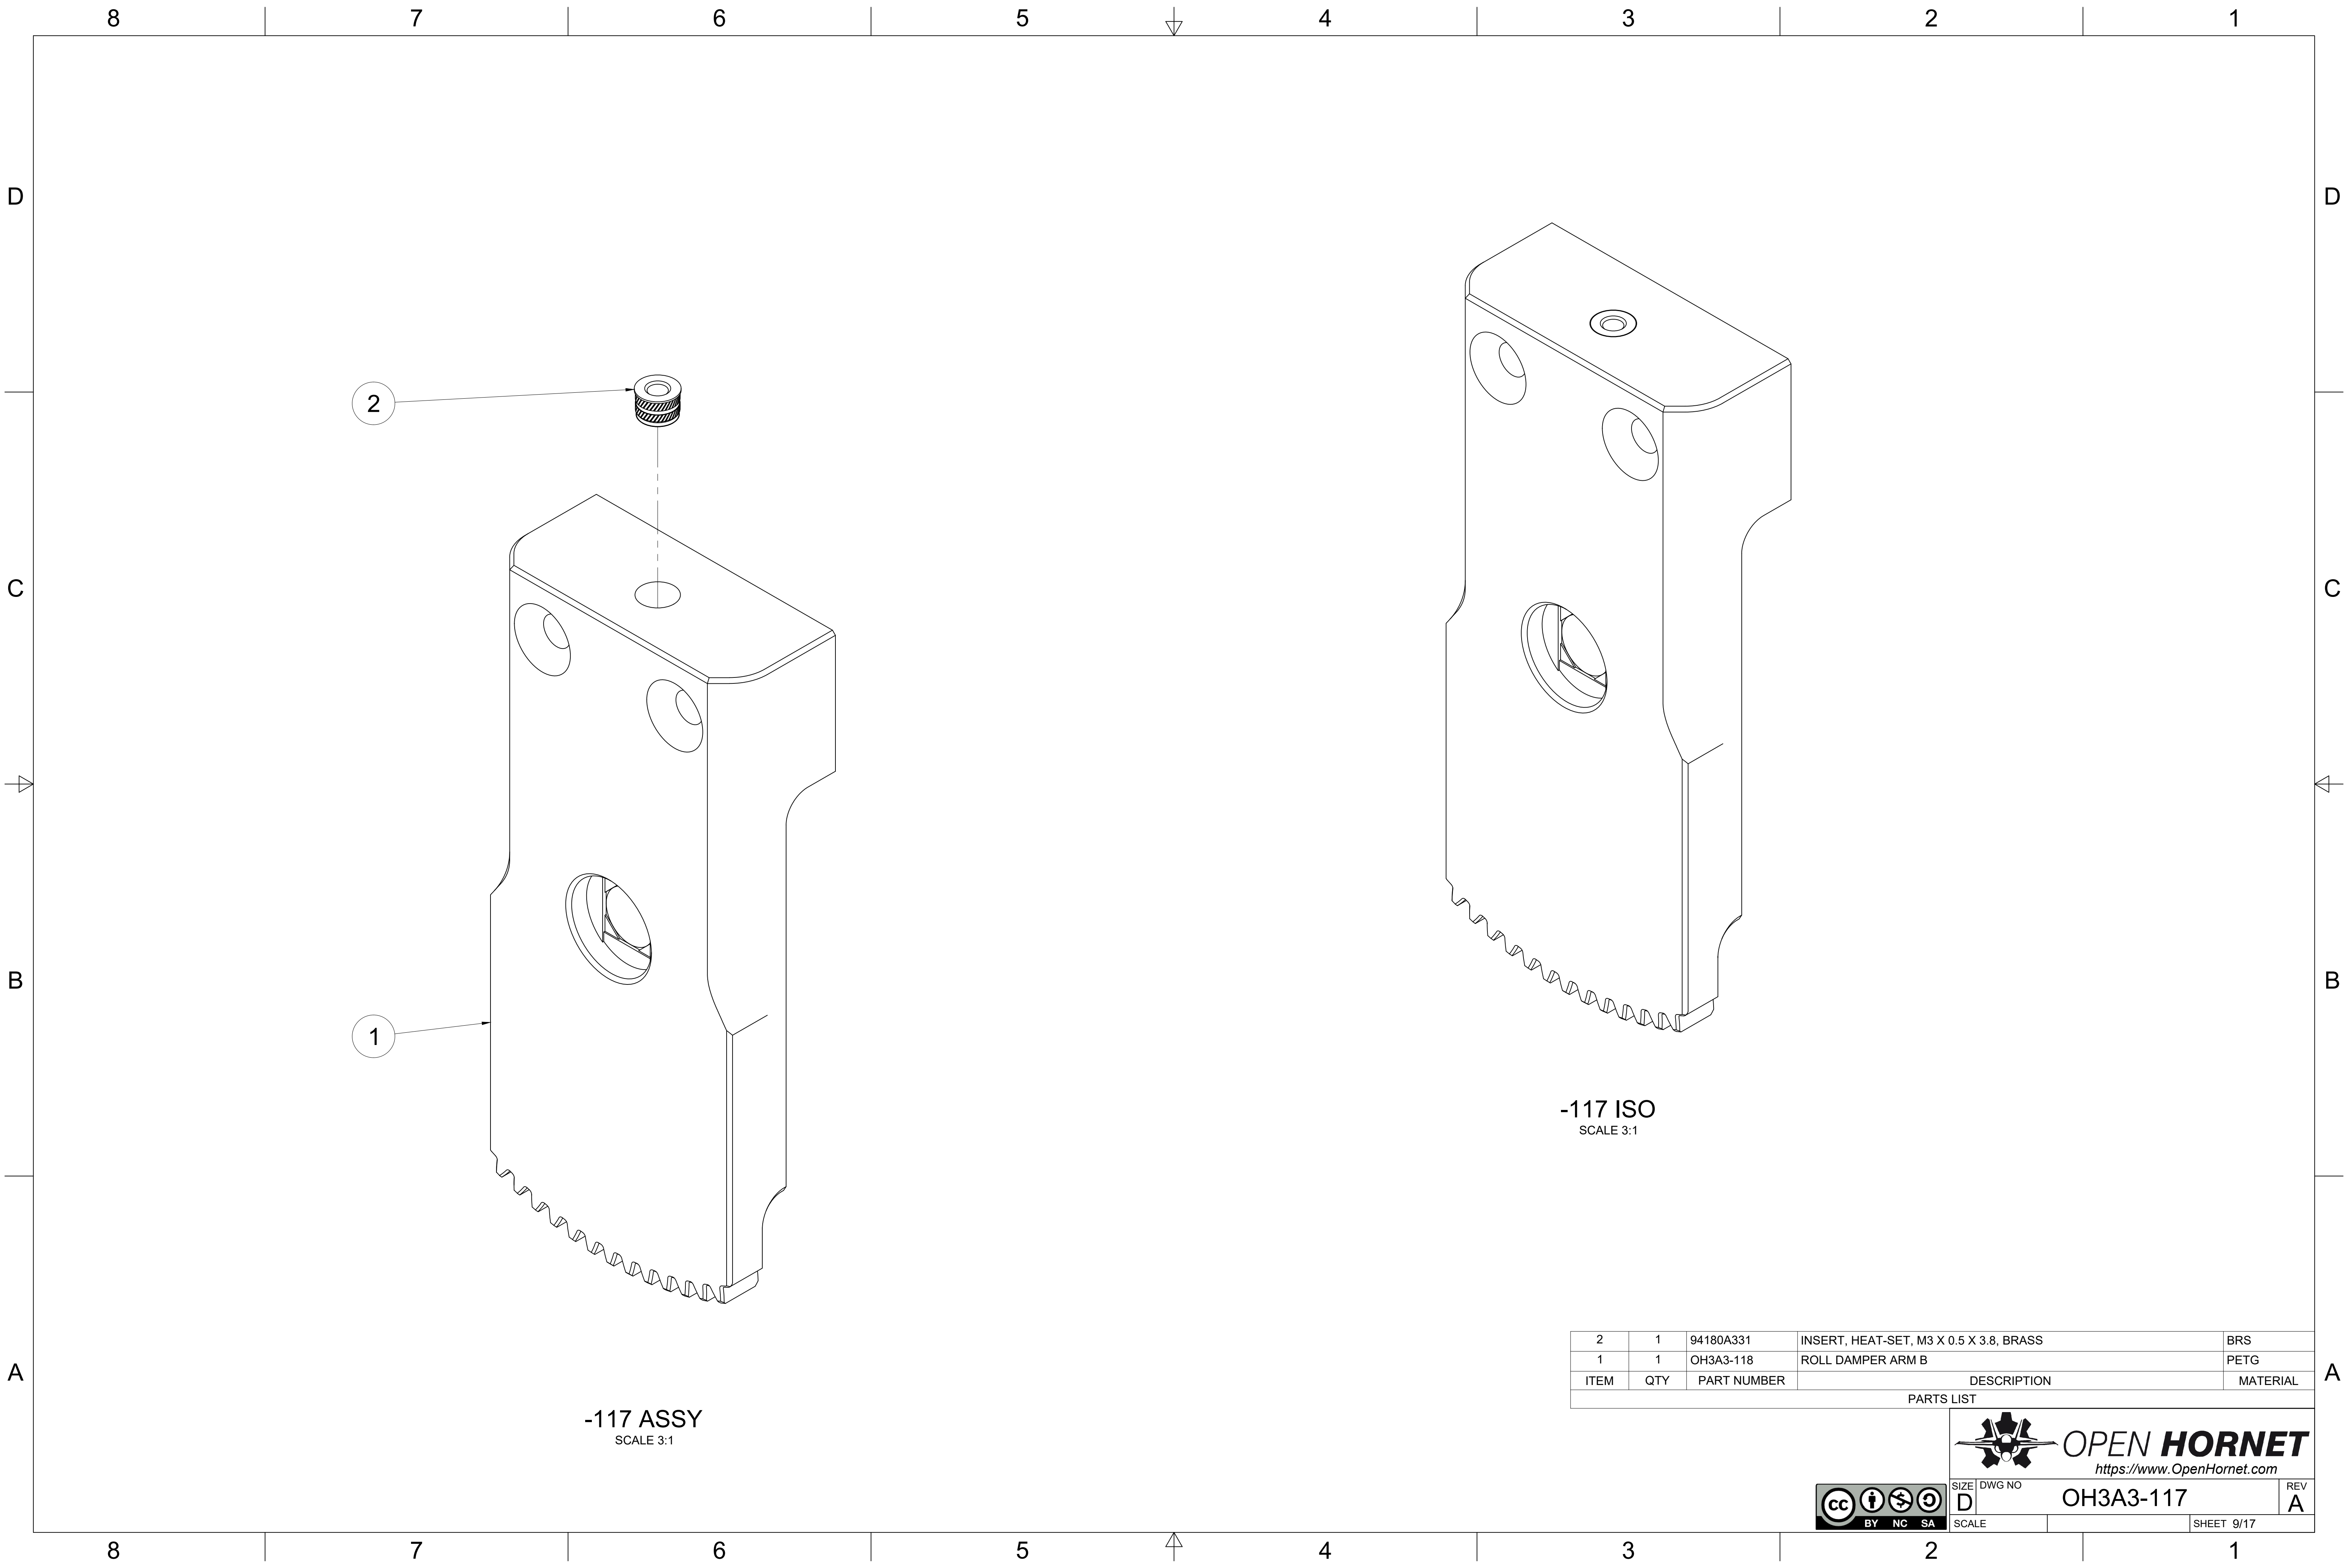

D

C

B

A

D

C

B

A

-117 ASSY
SCALE 3:1

-117 ISO
SCALE 3:1


2	1	94180A331	INSERT, HEAT-SET, M3 X 0.5 X 3.8, BRASS	BRS
1	1	OH3A3-118	ROLL DAMPER ARM B	PETG
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL

PARTS LIST



OPEN HORNET
<https://www.OpenHornet.com>

SIZE	DWG NO	REV
D	OH3A3-117	A
SCALE	SHEET 9/17	

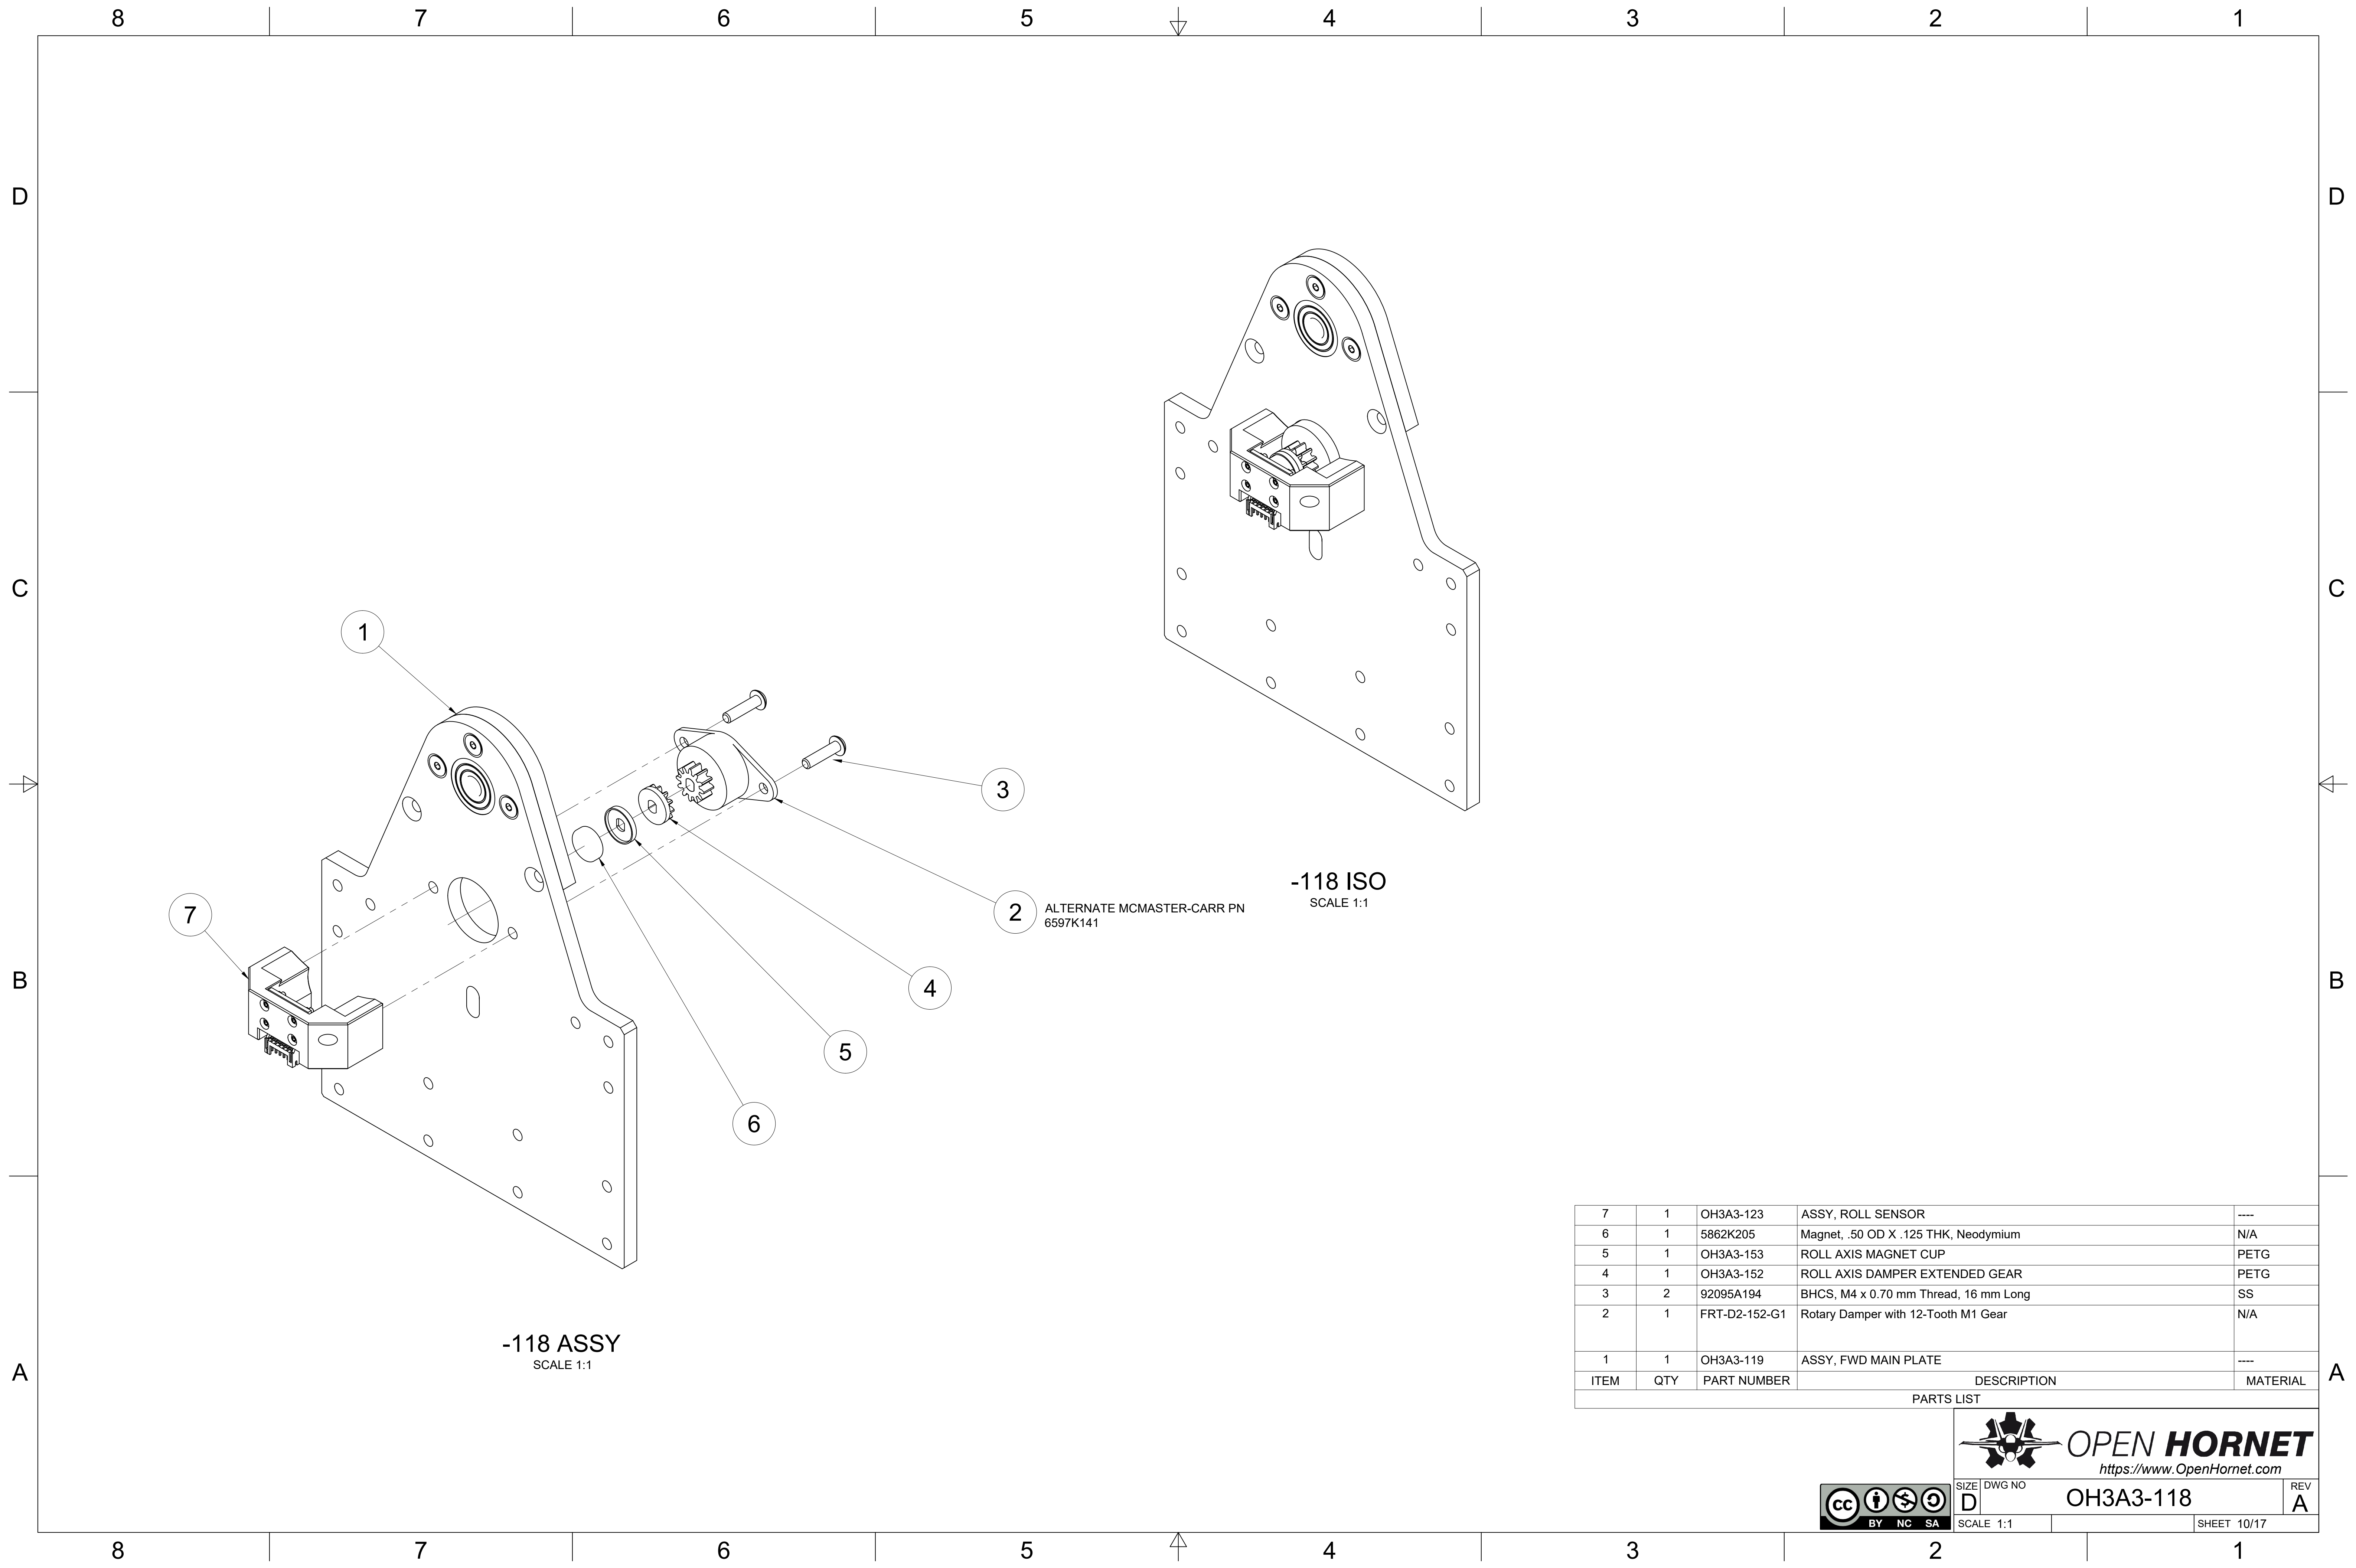


D


C

B

A

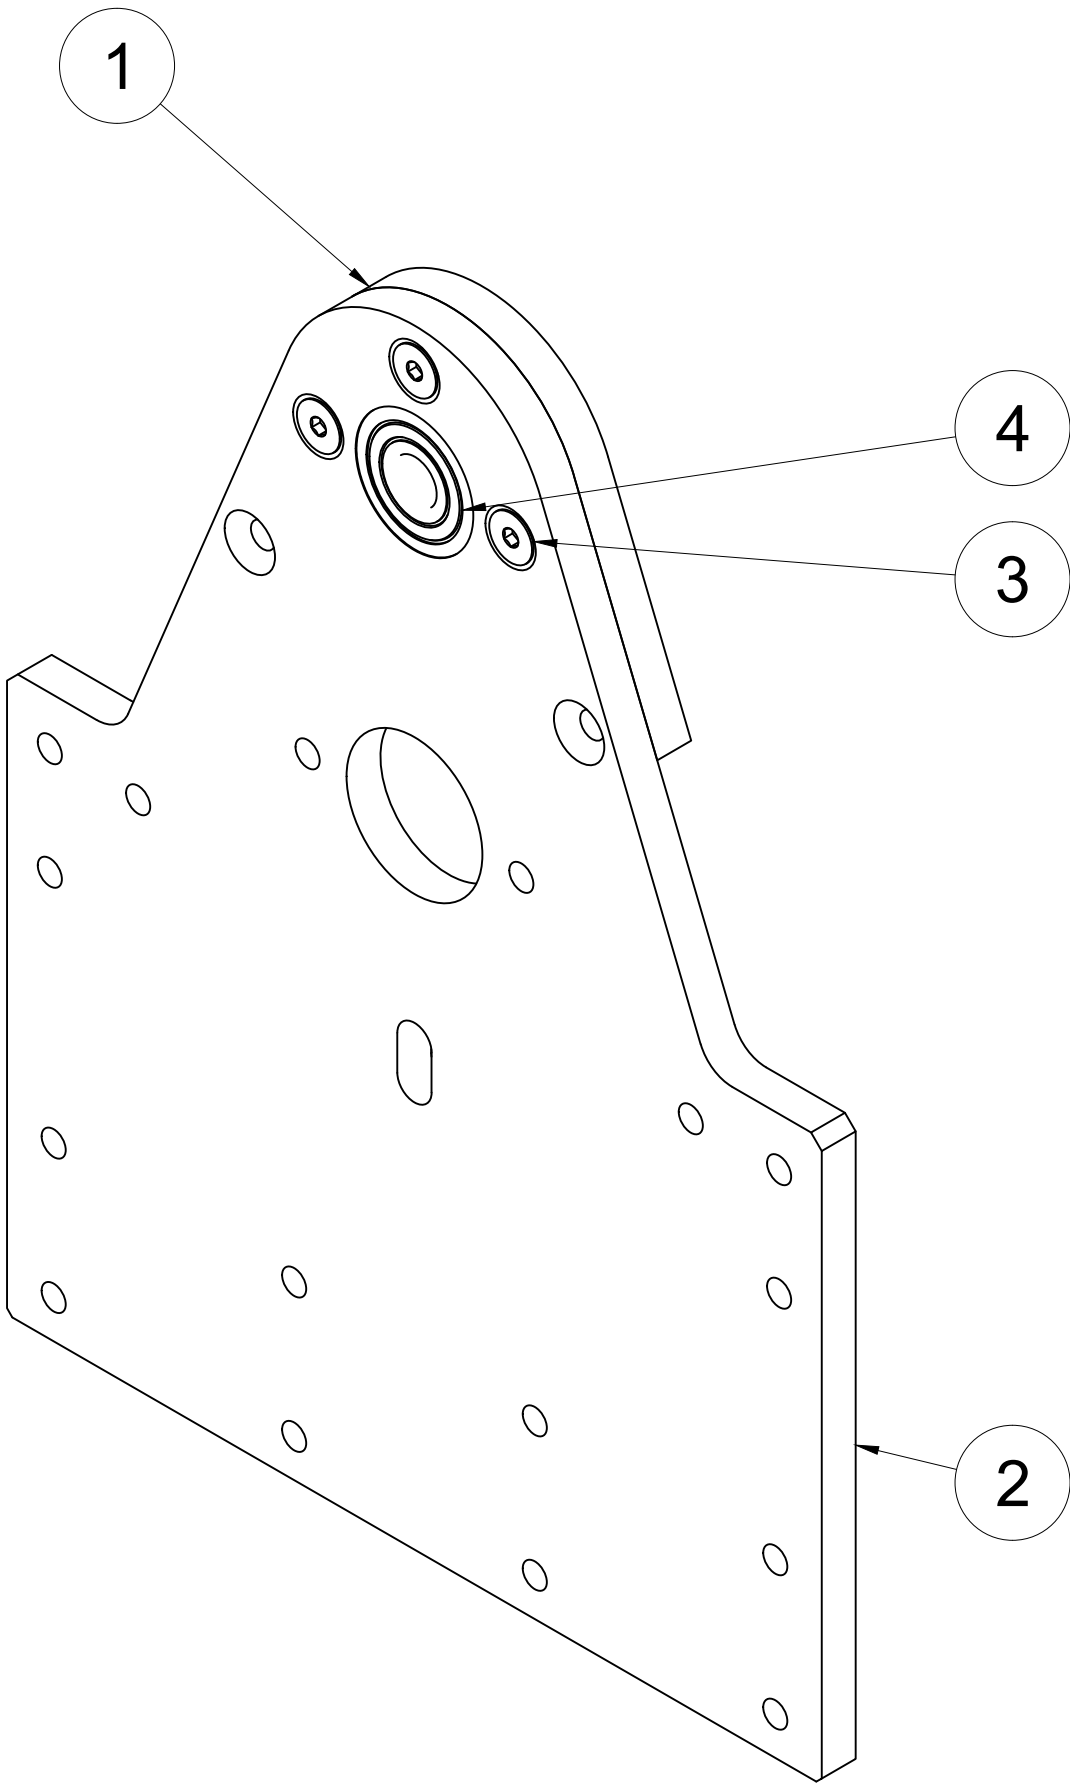

-119 ASSY
SCALE 1:1

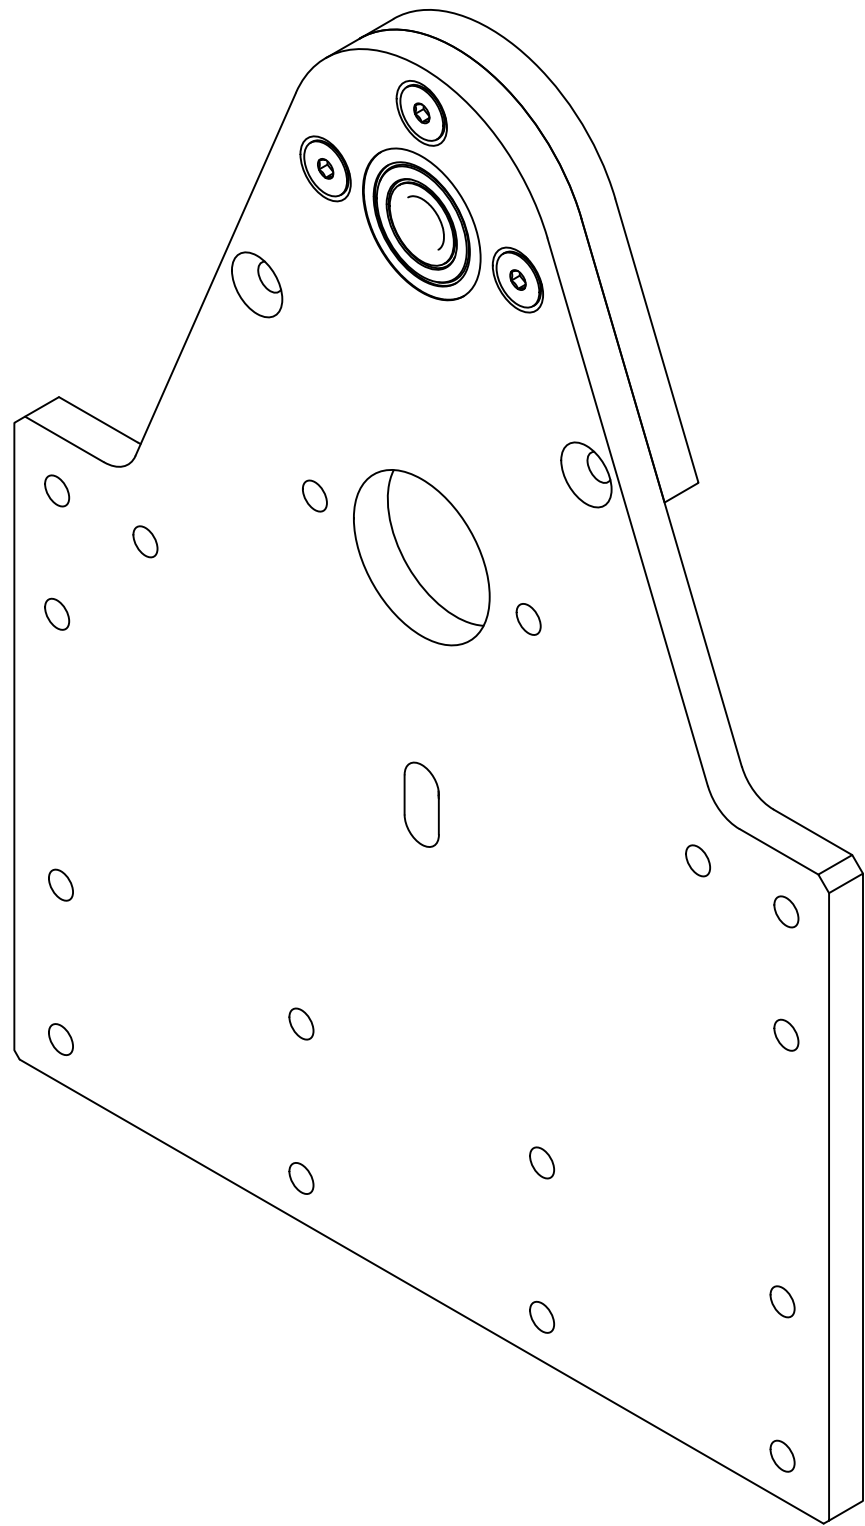


-119 ISO
SCALE 1:1

4	1	608-2RS	8x22x7 Sealed Radial Ball Bearing	STEEL
3	3	92125A192	FHCS, M4 x 0.7 mm, 12 mm Long	SS
2	1	OH3A3-120	MAIN PLATE	ALU
1	1	OH3A3-121	BEARING PLATE	ALU
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
PARTS LIST				




SIZE	DWG NO	REV
D	OH3A3-119	A
SCALE 1:1		SHEET 11/17

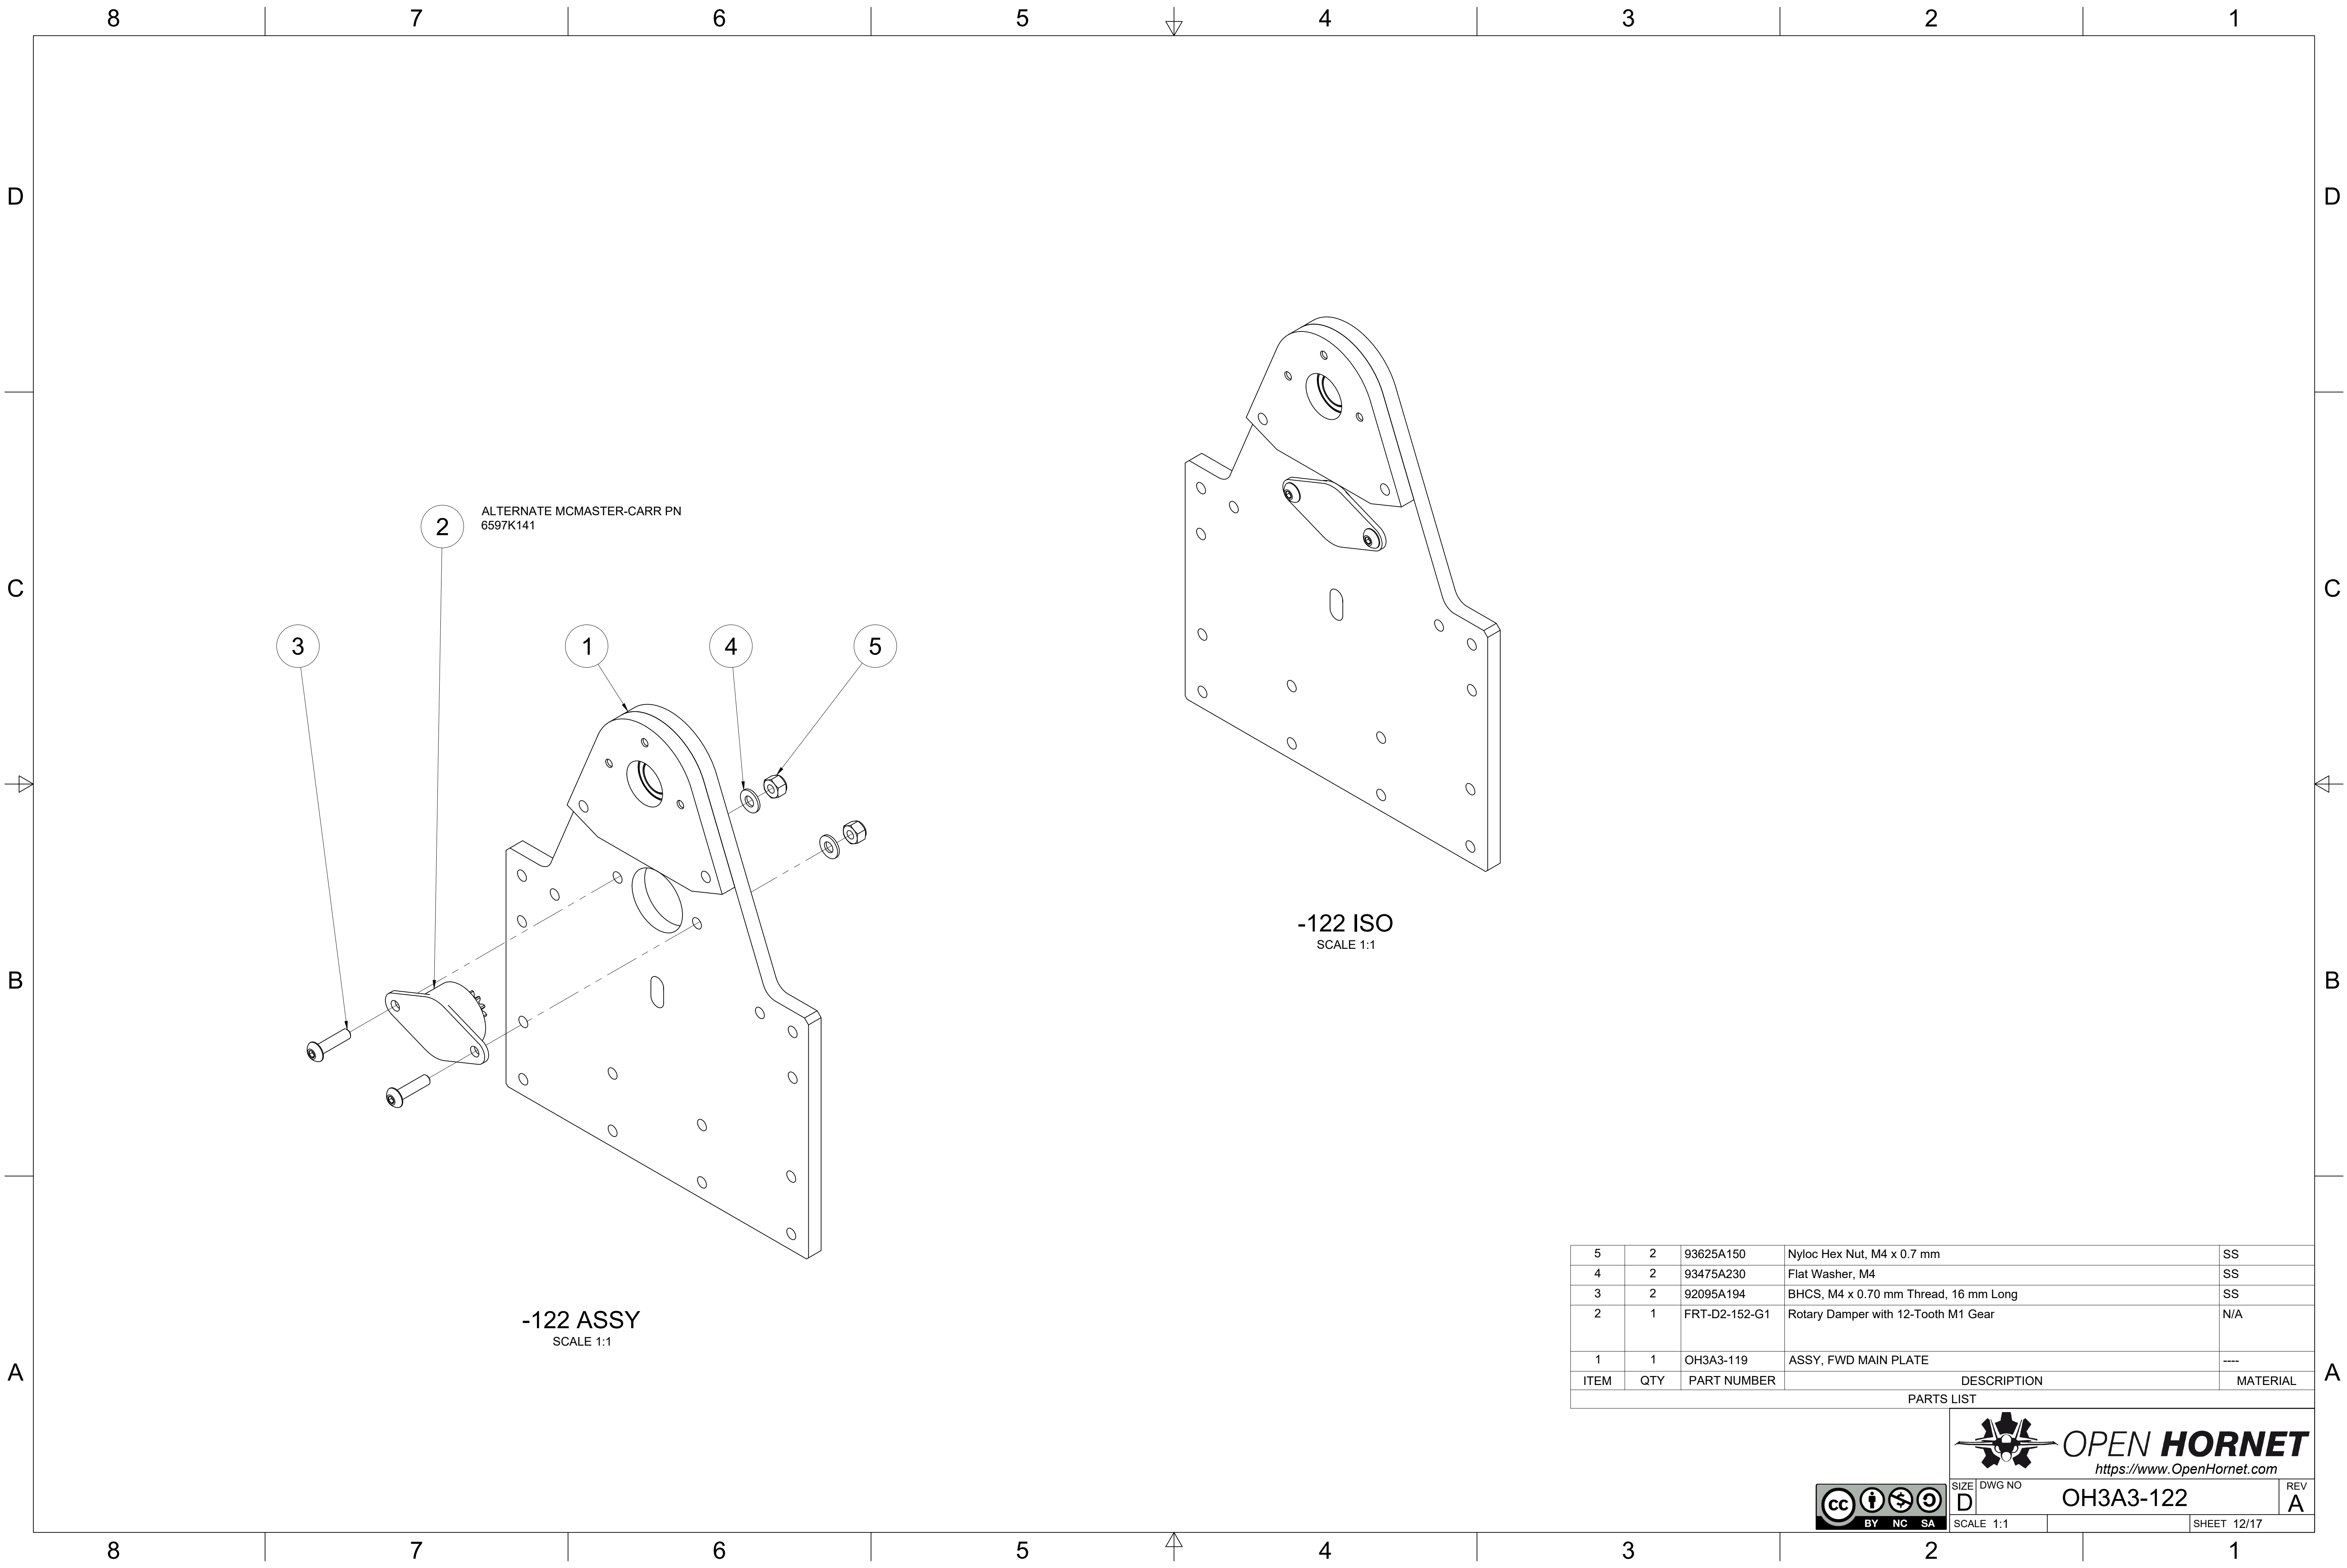


5	2	93625A150	Nyloc Hex Nut, M4 x 0.7 mm	SS
4	2	93475A230	Flat Washer, M4	SS
3	2	92095A194	BHCS, M4 x 0.70 mm Thread, 16 mm Long	SS
2	1	FRT-D2-152-G1	Rotary Damper with 12-Tooth M1 Gear	N/A
1	1	OH3A3-119	ASSY, FWD MAIN PLATE	----
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
PARTS LIST				



SIZE	DWG NO	REV
D	OH3A3-122	A
SCALE 1:1		SHEET 12/17

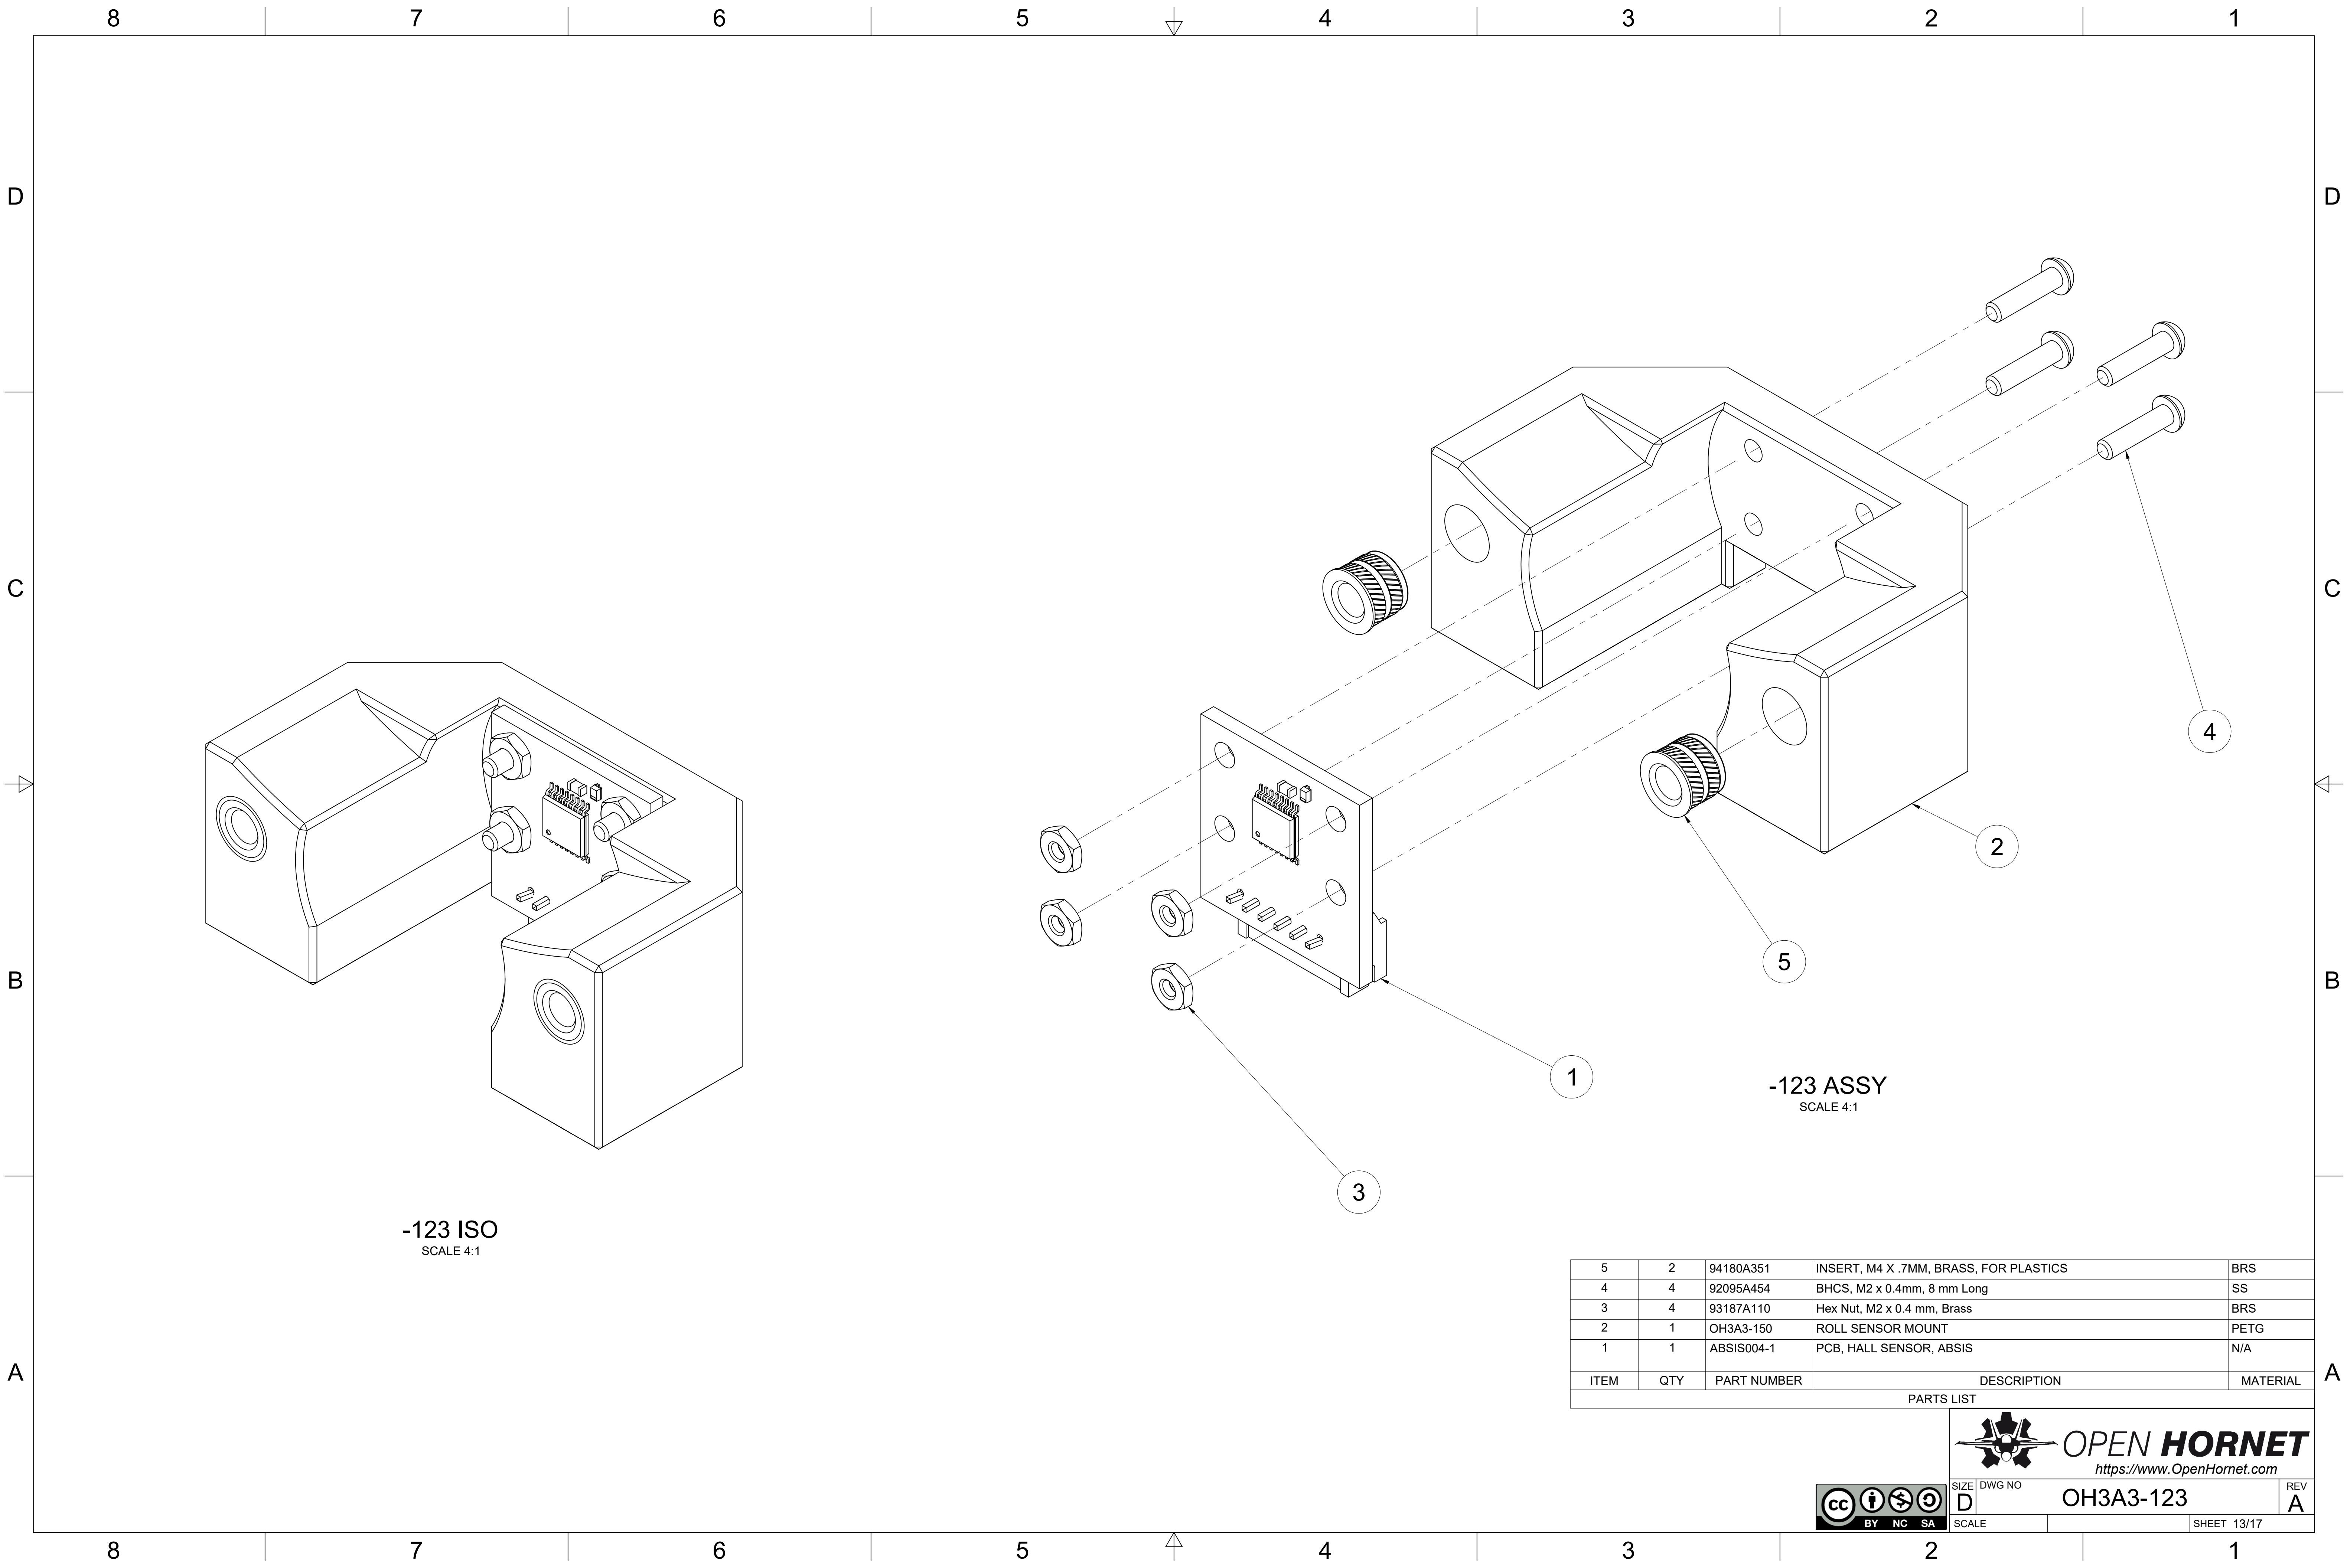

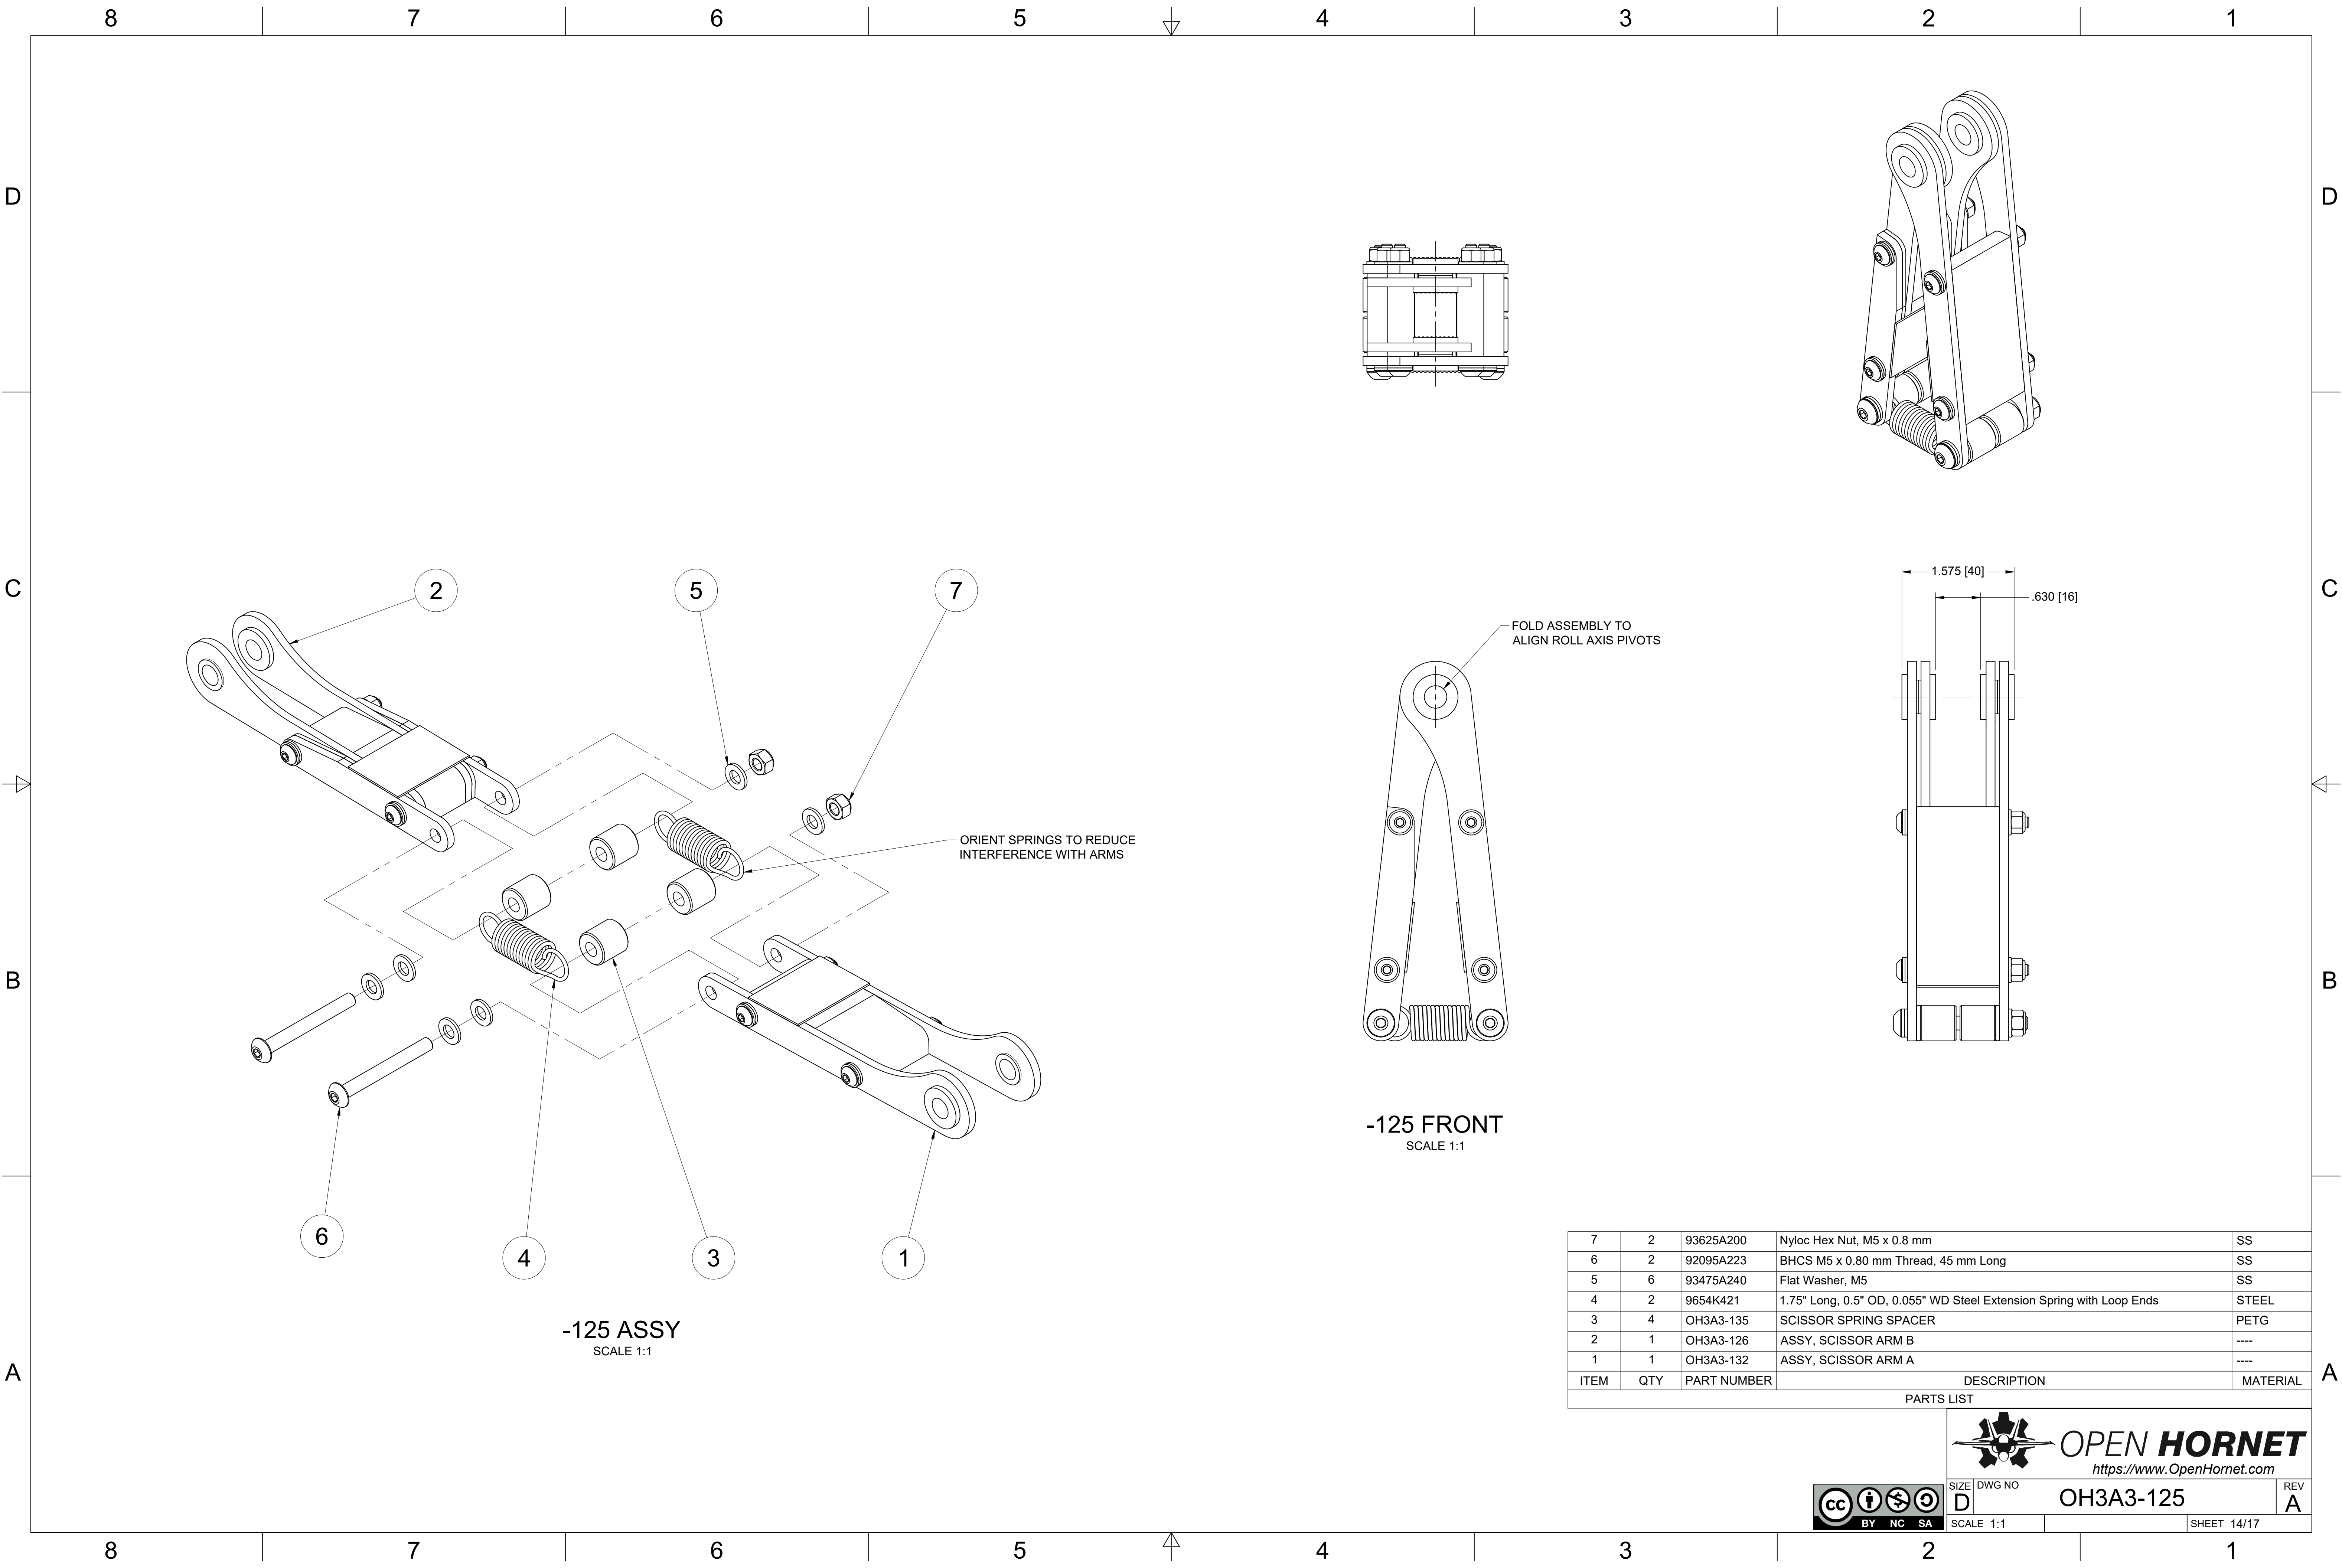


7	2	93625A200	Nyloc Hex Nut, M5 x 0.8 mm	SS
6	2	92095A223	BHCS M5 x 0.80 mm Thread, 45 mm Long	SS
5	6	93475A240	Flat Washer, M5	SS
4	2	9654K421	1.75" Long, 0.5" OD, 0.055" WD Steel Extension Spring with Loop Ends	STEEL
3	4	OH3A3-135	SCISSOR SPRING SPACER	PETG
2	1	OH3A3-126	ASSY, SCISSOR ARM B	----
1	1	OH3A3-132	ASSY, SCISSOR ARM A	----
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
PARTS LIST				




OPEN HORNET
<https://www.OpenHornet.com>

SIZE	DWG NO	REV
D	OH3A3-125	A
SCALE 1:1		SHEET 14/17

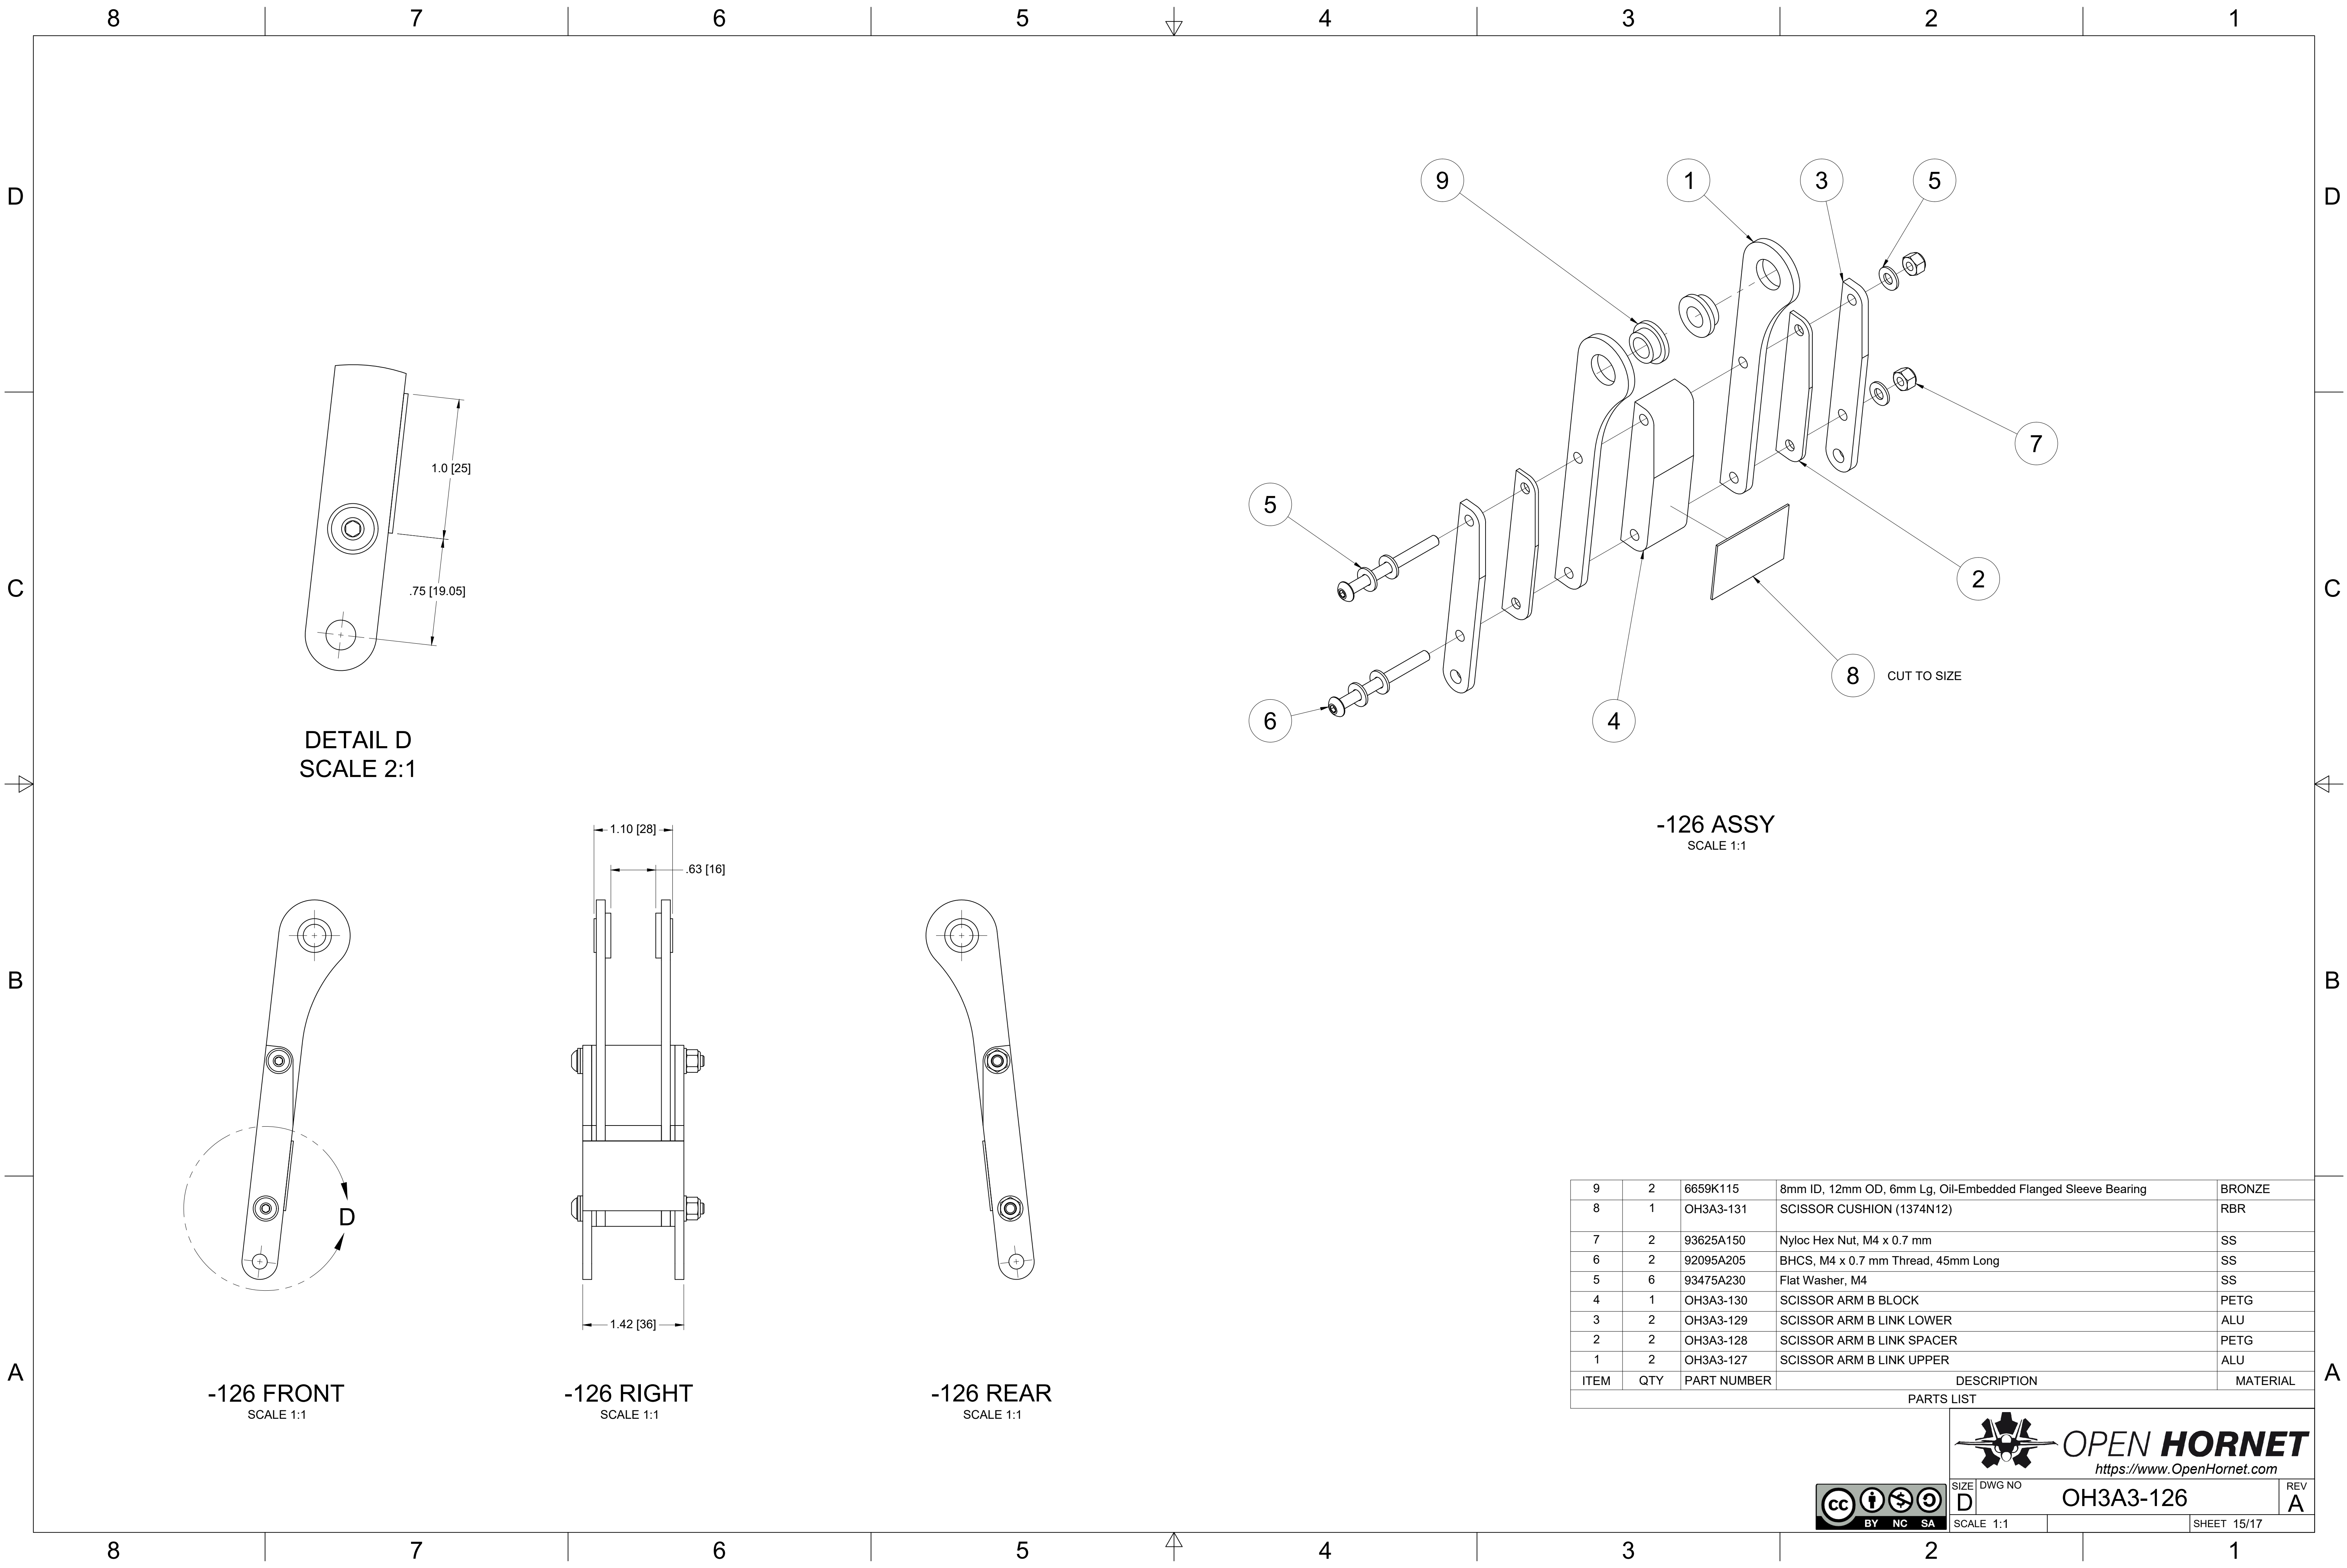

9	2	6659K115	8mm ID, 12mm OD, 6mm Lg. Oil-Embedded Flanged Sleeve Bearing	BRONZE
8	1	OH3A3-131	SCISSOR CUSHION (1374N12)	RBR
7	2	93625A150	Nyloc Hex Nut, M4 x 0.7 mm	SS
6	2	92095A205	BHCS, M4 x 0.7 mm Thread, 45mm Long	SS
5	6	93475A230	Flat Washer, M4	SS
4	1	OH3A3-130	SCISSOR ARM B BLOCK	PETG
3	2	OH3A3-129	SCISSOR ARM B LINK LOWER	ALU
2	2	OH3A3-128	SCISSOR ARM B LINK SPACER	PETG
1	2	OH3A3-127	SCISSOR ARM B LINK UPPER	ALU
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
PARTS LIST				



SIZE	D	DWG NO	OH3A3-126	REV	A
SCALE	1:1			SHEET 15/17	

