

Cover Page

Standard: BACC30AB Rev: (AE) 25-Jun-2015

WARNING - The Export Control or Intellectual Property language on this page takes precedence over any such language that may appear on subsequent pages of this document.

No license is required for the dissemination of the commercial information contained herein to foreign persons other than those from or in the terrorist supporting countries identified in the United States Export Administration Regulations (EAR) (15 CFR 730-774). It is the responsibility of the individual in control of this data to abide by U.S. export laws.

ECCN EAR99

Boeing Proprietary, Distribution limited to Boeing employees and others covered by applicable proprietary information or nondisclosure agreements.

Copyright © 1993, 1995, 1997, 2003, 2005-2007, 2014-2015 Boeing. All rights reserved.

Any reproduction of this document or portions thereof must also reproduce this page of the document.

BOEING PART STANDARD
THE BOEING COMPANY



BACC30AB

Revision AE
25 June 2015
Page 1 of 7

COLLAR, PRELOAD, SHEAR, A286 CRES, 450 F AND 900 F (NOMINAL AND OVERSIZE)

TECHNICAL CHANGES IDENTIFIED BY REVISION BAR.

FOR STATUS OF INACTIVATION SEE APPLICABILITY SECTION.

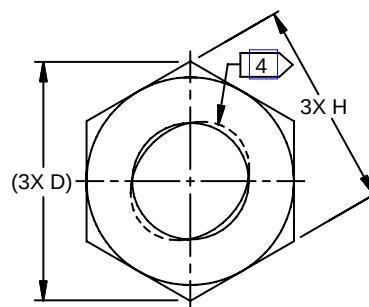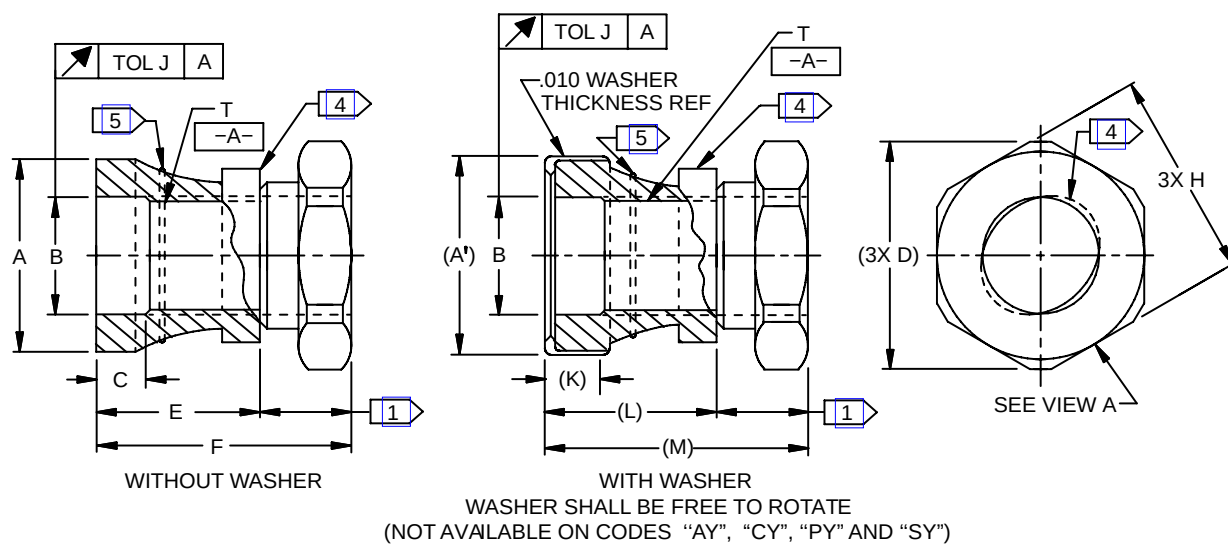

VIEW A 

CODES "AY", "CY", "PY" AND "SY" ONLY

DIMENSIONING AND TOLERANCING PER [ANSI Y14.5M-1982](#).
DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED.
DIMENSIONS APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.

TABLE I - NOMINAL SIZE

BOEING STANDARD NUMBER BACC30AB ⑥	T NOMINAL THREAD SIZE ⑫	ØA		ØA' REF	ØB		C REF OLD ⑪	C + .010/ - .000 NEW ⑪	D REF
		MAX	MIN		MAX	MIN			
5	.1640-32	.287	.283	.320	.173	.166	.120	.102	.341
6	.1900-32	.307	.303	.340	.200	.195	.120	.102	.341
8	.2500-28	.412	.408	.442	.261	.254	.125	.107	.481
10	.3125-24	.518	.512	.552	.325	.319	.135	.117	.621
12	.3750-24	.620	.614	.665	.388	.381	.135	.117	.697
14	.4375-20	.733	.727	.765	.450	.442	.150	.132	.837
16	.5000-20	.848	.842	.880	.521	.507	.150	.132	.965
18	.5625-18	.915	.905	.940	.576	.570	.158	.140	1.045

BOEING STANDARD NUMBER BACC30AB ⑥	T NOMINAL THREAD SIZE ⑫	E REF OLD ⑪	E MAX NEW ⑪	F REF OLD ⑪	F MAX NEW ⑪	H HEXAGON		TOL J
						MAX	MIN	
5	.1640-32	.280	.275	.460	.447	.314	.302	.005
6	.1900-32	.290	.294	.470	.457	.314	.302	.005
8	.2500-28	.355	.350	.565	.552	.440	.425	.005
10	.3125-24	.445	.440	.685	.672	.565	.550	.005
12	.3750-24	.490	.490	.755	.744	.628	.613	.006
14	.4375-20	.575	.570	.875	.862	.753	.736	.006
16	.5000-20	.625	.620	.955	.942	.878	.861	.006
18	.5625-18	.685	.680	1.042	1.029	.941	.924	.006

BOEING STANDARD NUMBER BACC30AB ⑥	K REF NEW ⑪	L REF NEW ⑪	M REF NEW ⑪	TORQUE-OFF INCH-LBS ①
5	.120	.290	.460	15-25
6	.120	.309	.470	25-35
8	.125	.365	.565	60-80
10	.135	.455	.685	130-160
12	.135	.505	.755	200-240
14	.150	.585	.875	270-330
16	.150	.635	.955	370-430
18	.158	.695	1.042	500-575

TABLE II - OVERSIZE ²

BOEING STANDARD NUMBER BACC30AB ⁶	T NOMINAL THREAD SIZE ¹²	Ø A		Ø B		C REF OLD ¹¹	C + .010/ - .000 NEW ¹¹	D REF
		MAX	MIN	MAX	MIN			
6	.1900-32	.332	.328	.227	.223	.122	.102	.380
8	.2500-28	.427	.423	.290	.286	.127	.107	.484
10	.3125-24	.560	.554	.356	.350	.137	.117	.624
12	.3750-24	.683	.675	.419	.413	.137	.117	.763
14	.4375-20	.748	.740	.481	.475	.152	.132	.840
16	.5000-20	.870	.860	.543	.537	.152	.132	.970

BOEING STANDARD NUMBER BACC30AB ⁶	T NOMINAL THREAD SIZE ¹²	E REF OLD ¹¹	E MAX NEW ¹¹	F REF OLD ¹¹	F MAX NEW ¹¹	H HEXAGON		TOL J
						MAX	MIN	
6	.1900-32	.290	.295	.470	.465	.346	.332	.005
8	.2500-28	.355	.360	.565	.560	.440	.425	
10	.3125-24	.445	.450	.685	.680	.565	.550	
12	.3750-24	.490	.490	.755	.750	.690	.675	
14	.4375-20	.575	.580	.875	.870	.753	.736	.006
16	.5000-20	.625	.630	.955	.950	.878	.861	

BOEING STANDARD NUMBER BACC30AB ⁶	K REF NEW ¹¹	L REF NEW ¹¹	M REF NEW ¹¹	TORQUE -OFF INCH-LBS ¹
6	.120	.309	.470	25-35
8	.125	.365	.565	60-80
10	.135	.455	.685	130-160
12	.135	.505	.755	200-240
14	.150	.585	.875	270-330
16	.150	.635	.955	370-430

NOTES

- ¹ THIS PORTION OF COLLAR MUST TWIST OFF WITHIN TORQUE-OFF VALUES LISTED IN [Table I](#) OR [Table II](#) AS APPLICABLE.
- ² RESTRICTED USAGE: REPAIR ONLY.
- ³ HI-SHEAR CORPORATION IS NOW LISI AEROSPACE-HI-SHEAR PRODUCTS. THIS WAS A NAME CHANGE ONLY. PARTS MANUFACTURED UNDER THE HI-SHEAR NAME MAY BE PROCURED AND USED UNTIL STOCKS ARE DEPLETED.

- 4 THIS AREA DEFORMED TO PROVIDE A PREVAILING TORQUE LOCKING FEATURE.
- 5 LOCATION OF COLOR MARKING AND BEAD MARKING. SEE MARKING SECTION.
- 6 SEE CODING UNDER USAGE AND APPLICATION FOR COMPLETE BOEING PART NUMBER.
- 7 SIZE 5, SIZE 18, AND CODE "TW" NOT AVAILABLE IN OVERSIZE.
- 8 SIZE 18 NOT AVAILABLE WITH "NO CODE", "W", "K", AND "KW".
- 9 FAIRCHILD FASTENERS (SOUTHBAY OPERATIONS) IS NOW ALCOA FASTENING SYSTEMS - TORRANCE (VOI-SHAN PRODUCTS). THIS WAS A NAME CHANGE ONLY. PARTS MANUFACTURED UNDER THE FAIRCHILD NAME MAY BE PROCURED AND USED UNTIL STOCKS ARE DEPLETED.
- 10 SIZE 18 NOT AVAILABLE WITH CODES "A" AND "AY".
- 11 PARTS PRODUCED AFTER JANUARY 1, 2007 SHALL HAVE "NEW", "C", "E", "F", "K", "L", AND "M" DIMENSIONS. PRIOR MANUFACTURED PARTS WITH "OLD" DIMENSIONS MAY BE RECEIVED AND USED UNTIL INVENTORY IS DEPLETED.
- 12 THREADS PER [AS8879](#), CLASS UNJF-3B, EXCEPT UNJC-3B FOR SIZE 5 (.1640-32).

PROCUREMENT SPECIFICATION

[BPS-F-68](#), EXCEPT AS NOTED.

FOR LOCKING TORQUE, BREAKAWAY TORQUE, AND PRELOAD TESTS OF "A" AND "AY" CODED PARTS, TEST PIN SHALL BE 6AL-4V TITANIUM WITH ALUMINUM PIGMENTED COATING PER [BMS10-85](#), TYPE I, CLASS A, AND CETYL ALCOHOL LUBRICATION PER [AS87132](#), TYPE I OR TYPE III, GRADE OPTIONAL.

MATERIAL

- COLLAR - A286 CRES COMPOSITION PER [AMS5734](#) OR [AMS5731](#).
- WASHER - 300 SERIES CRES PER ASTM A 240, [AMS5901](#), [AMS5516](#), OR [AMS5513](#).

FINISH

- COLLAR - UNPLATED, PASSIVATE PER [AMS 2700](#), METHOD 1, TYPE 2 OR TYPE 8, CLASS 1.
- SILVER PLATE PER [AMS2410](#), .0002 MINIMUM THICKNESS ON SURFACES WHICH CAN BE TOUCHED WITH A .75 DIAMETER BALL. THREADS SHALL SHOW COMPLETE COVERAGE, BUT THICKNESS REQUIREMENT IS WAIVED.
- CADMIUM PLATE PER [AMS-QQ-P-416](#), TYPE II, CLASS 2, EXCEPT COLOR GREEN.
- ALUMINUM PIGMENTED COATING PER [BMS10-85](#), TYPE I, CLASS A. INSTALLATION FORCE TESTING DOES NOT APPLY.

- WASHER
- UNPLATED, PASSIVATE PER [AMS2700](#), METHOD 1, TYPE 6 OR TYPE 7, CLASS 1.
 - CADMIUM PLATE PER [AMS-QQ-P-416](#), TYPE II, CLASS 2.

LUBRICATION

CETYL ALCOHOL PER [AS87132](#), TYPE I OR TYPE III, GRADE OPTIONAL.

SOLID FILM LUBRICANT PER [AS5272](#), TYPE I.

MARKING

FOR CODES "S", "SW", "SY" AND "TW" ONLY, APPLY PERMANENT YELLOW COLOR MARKING WITH DOT OR SPRAY SIMILAR TO COLOR 13655 PER [FED-STD-595](#) OR [MIL-PRF-23377](#), TYPE I. COLLARS MANUFACTURED PRIOR TO OCTOBER 31, 1995 WITH [MIL-PRF-23377](#) TYPE II (DARK GREEN) MAY BE PROCURED AND USED UNTIL STOCKS ARE DEPLETED.^[5]

ADDITIONALLY, .010 RADIUS REF BEAD FOR MANUFACTURER IDENTIFICATION, SEE [Table III](#).^[5]

TABLE III - MARKING

MANUFACTURER	IDENTIFICATION MARKING ^[5]
ALCOA ^[9]	ONE BEAD
LISI AEROSPACE - HI-SHEAR ^[3]	NONE
MONOGRAM	THREE BEADS
SPS	TWO BEADS

PROCUREMENT

ALCOA FASTENING SYSTEMS - TORRANCE (VOI SHAN PRODUCTS)(CAGE CODE 5M902) ^[9]
(FOR SIZES 5 THRU 14, ALL CODES EXCEPT "A" AND "AY" ONLY)
(FOR SIZE 16 ONLY, ALL CODES)

LISI AEROSPACE - HI-SHEAR PRODUCTS (CAGE CODE 73197) ^[3]
(FOR SIZES 5 THRU 16 ONLY)

MONOGRAM AEROSPACE FASTENERS (CAGE CODE 98524)
(FOR SIZES 5 THRU 10, ALL CODES EXCEPT "CW", "PW", "SW", AND "TW" ONLY)

SPS TECHNOLOGIES INC, AEROSPACE PRODUCTS DIV (CAGE CODE 56878)
(FOR ALL SIZES, ALL CODES EXCEPT "A" AND "AY" ONLY)

THE MANUFACTURERS LISTED IN [BPS-F-68SUP](#) AND THEIR AUTHORIZED DISTRIBUTORS ARE THE ONLY APPROVED SOURCES FOR THE ABOVE QUALIFIED PRODUCTS. SEE [BPS-F-68SUP](#) FOR PLANT ADDRESSES. NO CHANGES IN PRODUCT DESIGN, BASIC METHODS OF MANUFACTURE, PLANT SITE OR QUALITY LEVEL SHALL BE MADE WITHOUT PRIOR NOTIFICATION AND PRIOR APPROVAL IN WRITING FROM THE BOEING COMPANY. MANUFACTURERS OF COMPETITIVE PRODUCTS MAY APPLY TO A SUPPLIER MANAGEMENT DEPARTMENT OF THE BOEING COMPANY FOR QUALIFICATION. IF A MANUFACTURER IS SHOWN ON THIS STANDARD, BUT IS NOT LISTED IN THE SUPPLEMENT, CONTACT THE DIVISIONAL ENGINEERING STANDARDS FOCAL POINT OR ENGINEERING STANDARDS FOR VERIFICATION.

THIS IS A MANUFACTURER-DESIGNED PRODUCT. BOEING MAKES NO REPRESENTATION WHATEVER REGARDING PATENT OR OTHER RIGHTS AFFECTING THE PRODUCT. THE LISTING OF ANY SUPPLIER DOES NOT IMPLY ANY DETERMINATION BY THE BOEING COMPANY OR BY ANY OTHER LISTED MANUFACTURER AS TO THE RIGHTS OF SUCH MANUFACTURER.

USAGE AND APPLICATION INFORMATION

BACC30AB COLLARS ARE INTENDED FOR USE WITH 6Al-4V TITANIUM ALLOY HEX-DRIVE BOLTS. WHEN CRES WASHERS ARE USED IN CONTACT WITH AN ALUMINUM SURFACE, THE ALUMINUM MUST BE PRIMED.

BACC30AB REPAIR COLLARS (CODE "Y") ARE FOR USE ON .0156 AND .0312 OVERSIZE FASTENERS.

CODING

DASH NUMBER DESIGNATES NOMINAL THREAD SIZE PER [Table I](#) OR [Table II](#), AS APPLICABLE. [7](#) [8](#) [10](#)

LETTER CODE FOLLOWING DASH NUMBER DESIGNATES NOMINAL OR OVERSIZE, FINISH, LUBRICATION, AND WASHER CONFIGURATION, PER [Table IV](#).


TABLE IV - CODING

BOEING STANDARD NUMBER	SIZE	COLLAR FINISH AND LUBRICATION	WASHER FINISH
BACC30AB()A 10	NOMINAL	ALUMINUM PIGMENTED COATING/ CETYL ALCOHOL	NO WASHER
BACC30AB()AY 2 7 10	OVERSIZE	ALUMINUM PIGMENTED COATING/ CETYL ALCOHOL	NO WASHER
BACC30AB()C	NOMINAL	CADMIUM PLATE/CETYL ALCOHOL	NO WASHER
BACC30AB()CW	NOMINAL	CADMIUM PLATE/CETYL ALCOHOL	PASSIVATED
BACC30AB()CY 2 7	OVERSIZE	CADMIUM PLATE/CETYL ALCOHOL	NO WASHER
BACC30AB()P	NOMINAL	SILVER PLATE/CETYL ALCOHOL	NO WASHER
BACC30AB()PW	NOMINAL	SILVER PLATE/CETYL ALCOHOL	PASSIVATED
BACC30AB()PY 2 7	OVERSIZE	SILVER PLATE/CETYL ALCOHOL	NO WASHER
BACC30AB()S	NOMINAL	PASSIVATED/SOLID FILM	NO WASHER
BACC30AB()SW	NOMINAL	PASSIVATED/SOLID FILM	CADMIUM PLATE

TABLE IV - CODING (Continued)

BOEING STANDARD NUMBER	SIZE	COLLAR FINISH AND LUBRICATION	WASHER FINISH
BACC30AB()SY 	OVERSIZE	PASSIVATED/SOLID FILM	NO WASHER
BACC30AB()TW 	NOMINAL	PASSIVATED/SOLID FILM	PASSIVATED

EXAMPLE OF PART NUMBER

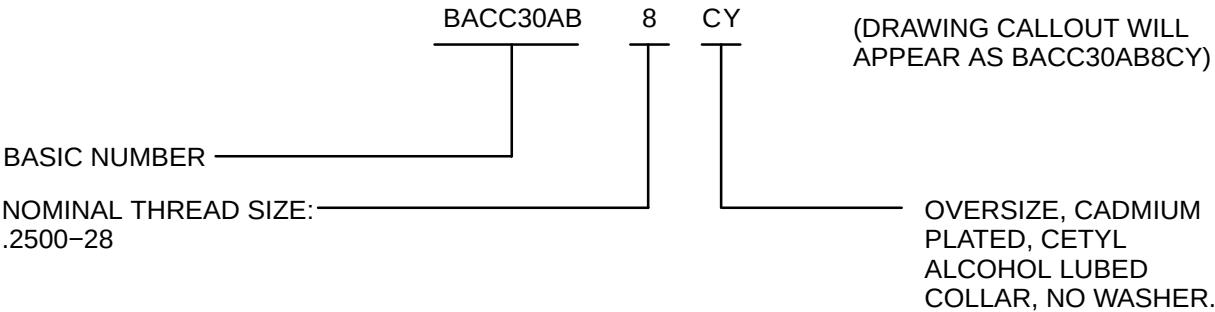

D-590 NOTES

SEE [D-590-PREFACE](#) FOR INACTIVATION DEFINITIONS. SEE [00000-D-590-INFO](#) FOR LINKS TO SUPERSESSION CLASS DEFINITIONS AND FAQ.

INACTIVATION APPLICABILITY

- BCA, BDS - BACC30AB(), BACC30AB()W, BACC30AB()K AND BACC30AB()KW COLLARS (LUBECO 905 AND LUBECO 2123) ARE INACTIVE FOR DESIGN AND PROCUREMENT. NO SUPERSEDING PARTS.
- BCA - BACC30AB()CW, BACC30AB()CY, BACC30AB()PY, BACC30AB()SW, BACC30AB()SY AND BACC30AB()AY, ARE INACTIVE FOR NEW DESIGN.