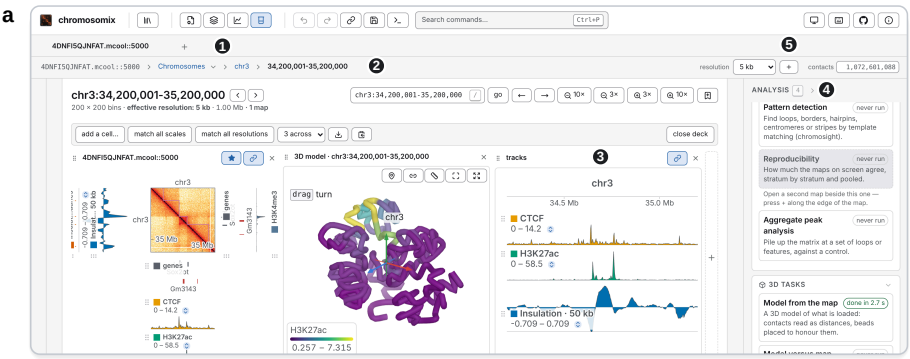


❶ Read in place from public data stores, nothing uploaded
❷ Only the queried view is read
❸ A 3-cell deck: a 2D map with its tracks, a 3D model and a 1D browser
❹ 30 analyses, in a background worker
❺ Each step logged as its command line

b


3D — Spatial models
3 file types · **3** analyses
reads .g3d, .3dg, .bed3d
pastis-NB and ShRec3D models · model vs map · spatial tracks

2D — Contact maps & interactions
9 file types · **18** analyses
reads .cool, .mcool, .hic, .pairs, HiC-Pro, BEDPE, …
P(s) · insulation · compartments · loops & borders · APA pile-ups · virtual 4C

1D — Sequences, signals, intervals, alignments
15 file types · **9** analyses
reads bigWig, BED, BAM, VCF, FASTA, GTF, …
peaks · metaplots · track correlation · motif search

every file type and analysis: Supplementary Tables 2 and 3

c

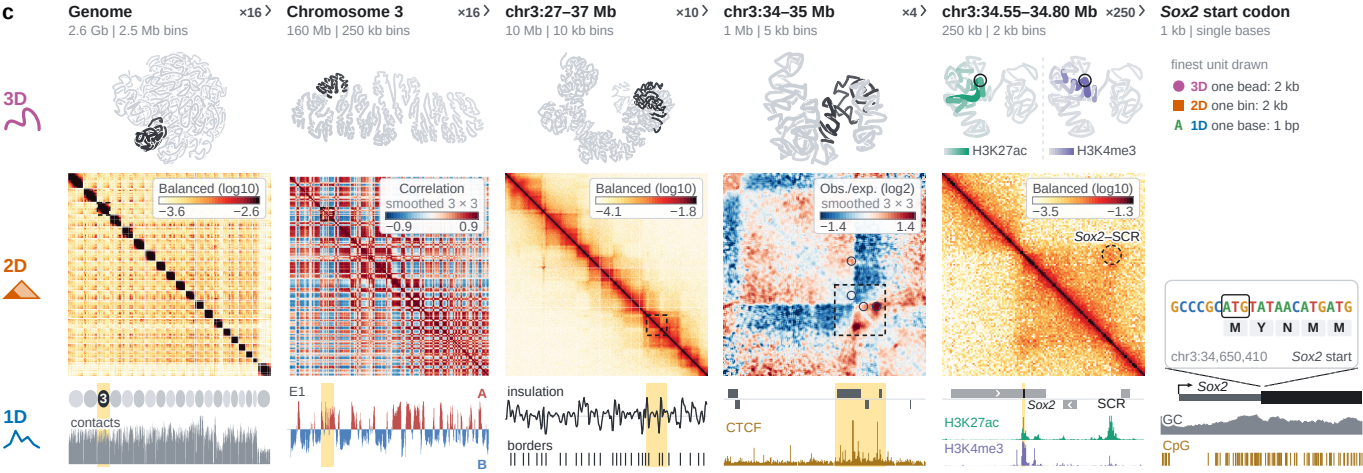

d

