



<https://jagstak.page.link/examples>



confatedchannel



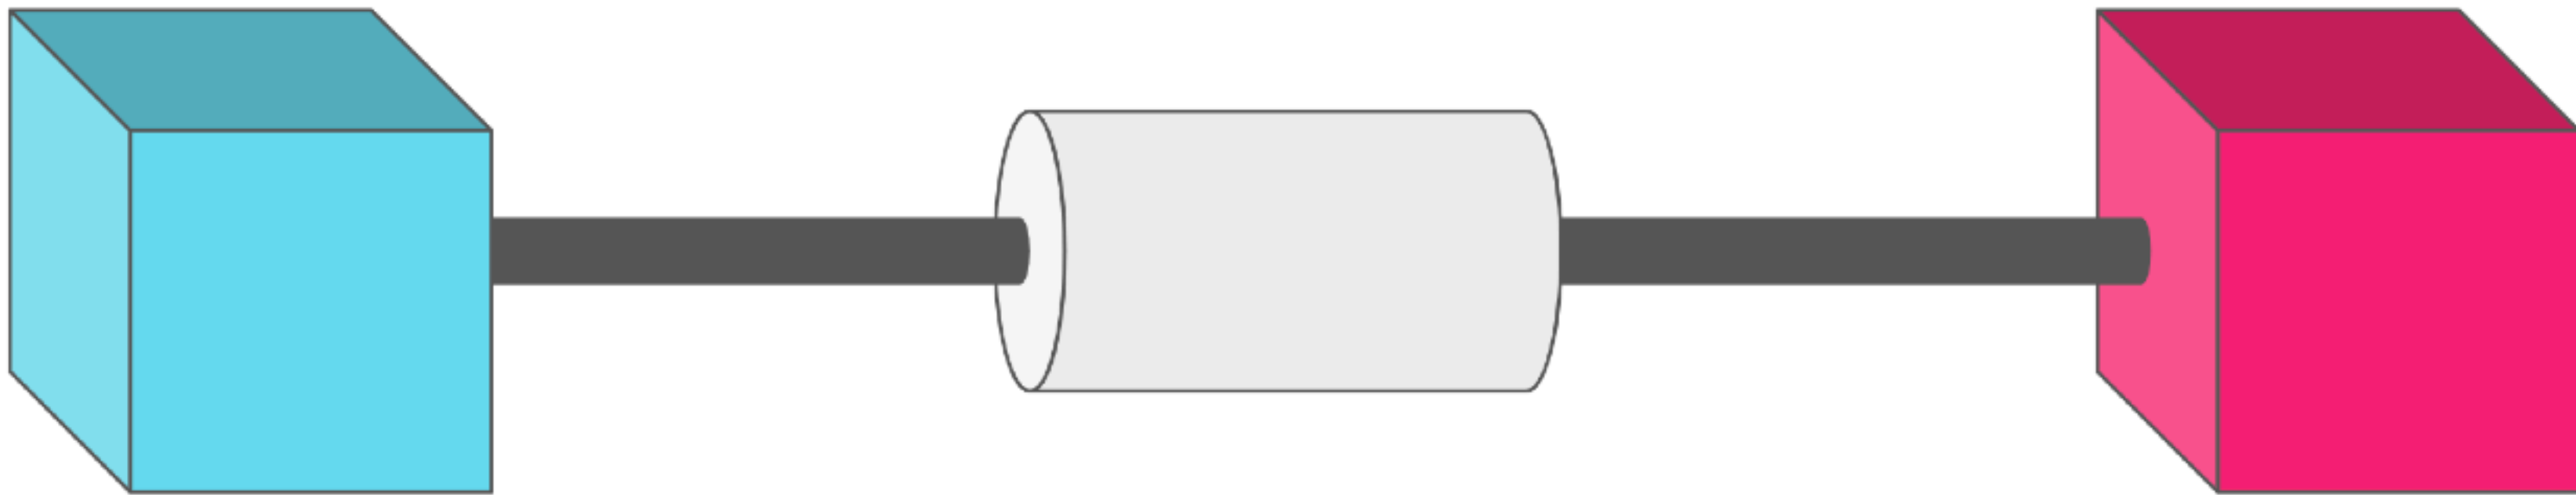




Sender
Coroutine



**Receiver
Coroutine
(busy)**

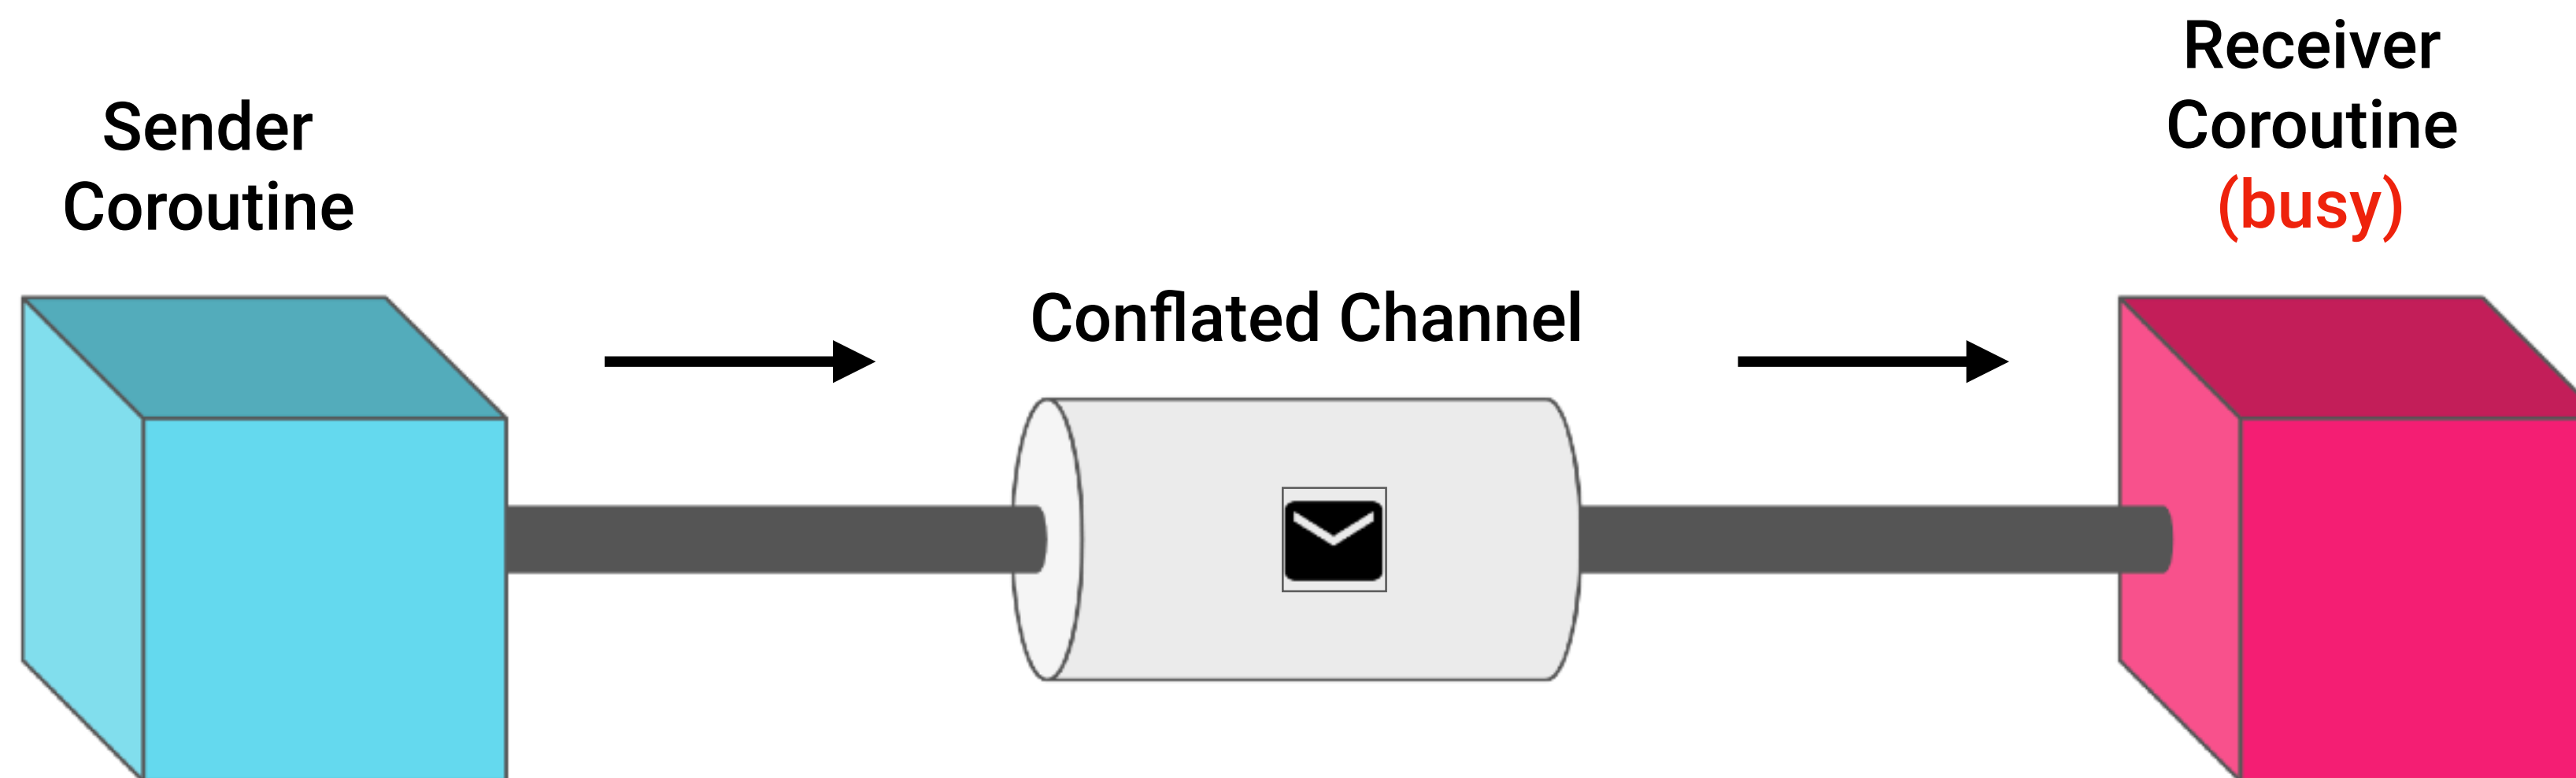

<https://jagstalk.page.link/examples>

```
fun main() = runBlocking {  
    val orders = listOf(...)  
    val time = measureTimeMillis {  
        coroutineScope {  
            launch(CoroutineName("barista-1")) { processOrders(orders) }  
            launch(CoroutineName("barista-2")) { processOrders(orders) }  
        }  
    }  
    log("time: $time ms")  
}
```