

## Assignment: OTP

### 1 Task 1

In this task, we encrypted a string of text using XOR encryption with two strings of the same length. Both strings are user provided input, which means this encryption is not as strong as a true one time pad which utilizes a true random key. This program reads each character of both inputs, converts each character to its hex ascii code and performs an XOR operation on both characters. It then pads the hex code with a leading zero if necessary.

#### 1.1 Code

```
1 def main():
2     string1 = input("Enter a string: ")
3     string2 = input("Enter another string of the same length: ")
4     xor = xor_strings(string1, string2)
5     print(f"Encrypted string hex: {xor}")
6
7 def xor_strings(string1: str, string2: str) -> str:
8     if len(string1) != len(string2):
9         raise ValueError("Strings are not the same length")
10
11     xor = ""
12     for c in range(len(string1)):
13         temp = ord(string1[c]) ^ ord(string2[c])
14         xor = xor + format(temp, '02x')
15
16     return xor
17
18 if __name__ == "__main__":
19     main()
```

#### 1.2 Usage

```
$ python3 task1.py
Enter a string:  Darlin dont you go
Enter another string of the same length:  and cut your hair!
Encrypted string hex:  250f164c0a1b54441601015259071449154e
```

## 2 Task 2

In this task, we encrypted the contents of a plaintext file using a randomly generated key of the same length as the contents of the file. We then wrote corresponding ciphertext to a new file in ascii format, then decrypted the ciphertext using the same random key.

### 2.1 Code

```
1 from base64 import b64encode
2 from sys import argv
3 from os import urandom
4
5 def main():
6     if len(argv) != 4:
7         print("Usage: task2.py <input file> <output ciphertext file>
8         <output plaintext file>")
9         exit(1)
10    with open(argv[1], 'r') as fd1:
11        plaintext = fd1.read()
12
13        key_bytes = urandom(len(plaintext))
14        key_str = b64encode(key_bytes).decode('UTF-8')
15        key_str = key_str[0:len(plaintext)]
16        key_hex = convert_to_hex(key_str)
17
18        print(f"Plaintext: {plaintext}")
19        print(f"Key string: {key_str}")
20        print(f"Key Length: {len(key_str)}, Plaintext Length:
21        {len(plaintext)}")
22        print(f"Key Hex: {key_hex}")
23
24        ciphertext_hex = xor_strings(plaintext, key_str)
25        print(f"Ciphertext hex: {ciphertext_hex}")
26
27        ciphertext_string = convert_from_hex(ciphertext_hex)
28
29        print(f"Ciphertext string: {ciphertext_string}")
30        decrypted_hex_text = xor_strings(ciphertext_string, key_str)
31
32        with open(argv[2], 'w') as fd2:
33            fd2.write(ciphertext_string)
34
35        print(f"Plaintext Hex: {decrypted_hex_text}")
36
37        decrypted_string_text = convert_from_hex(decrypted_hex_text)
38        print(f"Plaintext: {decrypted_string_text}")
39
40        with open(argv[3], 'w') as fd2:
41            fd2.write(decrypted_string_text)
42
43    # Converts character string to hex string
```

```

42 def convert_to_hex(string: str) -> str:
43     hex_str = ""
44     for c in range(len(string)):
45         hex_str = hex_str + format(ord(string[c]), '02x')
46     return hex_str
47
48 # Converts hex string to character string
49 def convert_from_hex(hex_str: str) -> str:
50     bytes_array = bytes.fromhex(hex_str)
51     ascii_str = bytes_array.decode()
52
53     return ascii_str
54
55 # Takes in 2 strings in character format -> returns hex string of XOR
56 def xor_strings(string1: str, string2: str) -> str:
57     if len(string1) != len(string2):
58         raise ValueError(f"Strings are not the same length: {len(string1)}
59         and {len(string2)}")
60
61     xor = ""
62     for c in range(len(string1)):
63         temp = ord(string1[c]) ^ ord(string2[c])
64         xor = xor + format(temp, '02x')
65
66     return xor
67
68 if __name__ == "__main__":
69     main()

```

## 2.2 Usage

```
$ python3 task2.py plaintext.txt encrypted.txt
```

## 3 Task 3

### 3.1 Code

```

1 from progressbar import ProgressBar
2 from base64 import b64encode
3 from sys import argv
4 from os import urandom
5
6 def main():
7     __HEADER_BYTES__ = 54
8     if len(argv) != 4:
9         print("Usage: task2.py <input image> <output image ciphertext>
10         <output image plaintext>")
11         exit(1)
12
13     with open(argv[1], 'rb') as fd1:

```

```

13     bmp_header = fd1.read(__HEADER_BYTES__)
14     bmp_bytes = fd1.read()
15
16     key_bytes = urandom(len(bmp_bytes))
17
18     ciphertext = xor_bytes(bmp_bytes, key_bytes)
19
20     # write encrypted image
21     with open(argv[2], 'wb') as fd2:
22         fd2.write(bmp_header)
23         fd2.write(ciphertext)
24
25     # write decrypted image
26     with open(argv[3], 'wb') as fd3:
27         decrypted_bytes = xor_bytes(ciphertext, key_bytes)
28         fd3.write(bmp_header)
29         fd3.write(decrypted_bytes)
30
31 def xor_bytes(byte_string1: bytes, byte_string2: bytes) -> bytes:
32     if len(byte_string1) != len(byte_string2):
33         raise ValueError(f"bytes are not the same length:
34         {len(byte_string1)} and {len(byte_string2)}")
35
36     xor = b''
37     pbar = ProgressBar()
38     for c in pbar(range(len(byte_string1))):
39         xor += (byte_string1[c] ^ byte_string2[c]).to_bytes(1, 'big')
40
41     return xor
42
43 if __name__ == "__main__":
44     main()

```

## 3.2 Usage

```

$ pip3 install progressbar
$ python3 task3.py mustang.bmp encrypted-mustang.bmp decrypted-mustang.bmp
$ python3 task3.py cp-logo.bmp encrypted-cp-logo.bmp decrypted-cp-logo.bmp
$ diff mustang.bmp decrypted-mustang.bmp
$ diff cp-logo.bmp decrypted-cp-logo.bmp

```

### 3.2.1 Plaintext Images



Figure 1: Plaintext Mustang and CP Logo

### 3.2.2 Ciphertext Images

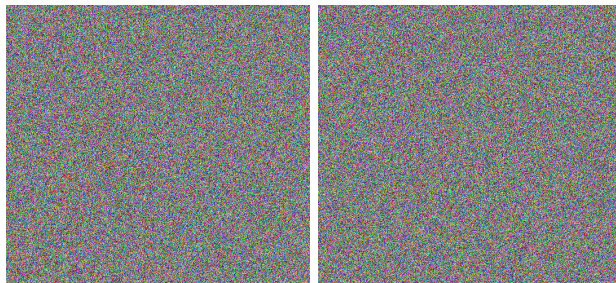


Figure 2: Plaintext Mustang and CP Logo

### 3.2.3 Decrypted Plaintext Images



Figure 3: Decrypted Plaintext Mustang and CP Logo

## 4 Task 4

### 4.1 Code

```

1 from progressbar import ProgressBar
2 from os import urandom
3
4 def main():
5     __HEADER_BYTES__ = 54
6
7     fd1 = open("cp-logo.bmp", 'rb')
8     fd2 = open("mustang.bmp", 'rb')
9
10    bmp_header = fd1.read(__HEADER_BYTES__)
11    fd2.read(__HEADER_BYTES__)
12
13    logo_bytes = fd1.read()
14    mustang_bytes = fd2.read()
15
16    key_bytes = urandom(len(logo_bytes))
17
18    ciphertext_logo = xor_bytes(logo_bytes, key_bytes)
19    ciphertext_mustang = xor_bytes(mustang_bytes, key_bytes)
20
21    # write encrypted image logo
22    with open("cp-logo-2tp.bmp", 'wb') as fd3:
23        fd3.write(bmp_header)
24        fd3.write(ciphertext_logo)
25
26    # write encrypted image mustang
27    with open("mustang-2tp.bmp", 'wb') as fd3:
28        fd3.write(bmp_header)
29        fd3.write(ciphertext_mustang)
30
31    # write XOR ciphertexts to a file
32    with open("xor.bmp", 'wb') as fd3:
33        decrypted_bytes = xor_bytes(ciphertext_logo, ciphertext_mustang)
34        fd3.write(bmp_header)
35        fd3.write(decrypted_bytes)
36
37    fd2.close()
38    fd1.close()
39
40
41 def xor_bytes(byte_string1: bytes, byte_string2: bytes) -> bytes:
42     if len(byte_string1) != len(byte_string2):
43         raise ValueError(f"bytes are not the same length:
44                             {len(byte_string1)} and {len(byte_string2)}")
45
46     xor = b''
47     pbar = ProgressBar()
48     for c in pbar(range(len(byte_string1))):
49         xor += (byte_string1[c] ^ byte_string2[c]).to_bytes(1, 'big')
50
51     return xor

```

```
52  
53 if __name__ == "__main__":  
54     main()
```

## 4.2 Usage

```
$ pip3 install progressbar  
$ python3 task4.py
```

#### 4.2.1 Plaintext Images



Figure 4: Plaintext Mustang and CP Logo

#### 4.2.2 Ciphertext Images

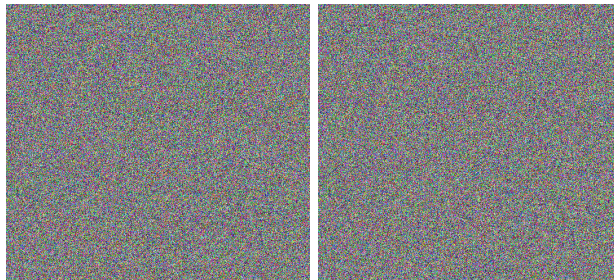


Figure 5: Ciphertext Mustang and CP Logo

#### 4.2.3 XOR Two Time Pad



Figure 6: XOR of Mustang Ciphertext and CP Logo Ciphertext



## 5 Questions

### 5.1 What is OTP? What are assumptions to achieve perfect secrecy?

OTP is a one-time pad that encrypts plaintext using a true random private key of the same length of the plaintext. The encryption process is a simple XOR of the private key and plaintext. To achieve perfect secrecy, 3 assumptions are made:

1. The private key was generated using a true random process.
2. The private key is the same length as the plaintext.
3. The private key is kept private between the sender and recipient.

### 5.2 From the results of Task 3, what do you observe? Are you able to derive any useful information about from either of the encrypted images? What are the causes for what you observe?

From Task 3, the results are images that appear to be random static. There are no discernable shapes, outlines, or anything that indicate what the image originally was. The reason for this is that the plaintext image was XOR'ed with a random key, which produces random bytes.

### 5.3 From the results of Task 4, are you able to derive any useful information about the original plaintexts from the resulting image? What are the causes for what you observe?

The ciphertext images that were created with the same private key appear to be random bytes with no discernable traits. However, once they have been XOR'ed together, the resulting image is rather interesting. It is no longer a collection of random bytes, but rather a mashed together image of the original 2 plaintext images with different colors. The reason this happens is due to both ciphertext images using the same private key. This produces the same results as XOR'ing the two original plaintext images together. This is verified with the following property:  $(A \oplus K) \oplus (B \oplus K) = A \oplus B$ .