
Figure 2 · How SCRAP uses NVIDIA Nemotron Lightning and Red Hat vLLM

Every agent calls the same open model, served by one vLLM instance on a single NVIDIA H100.

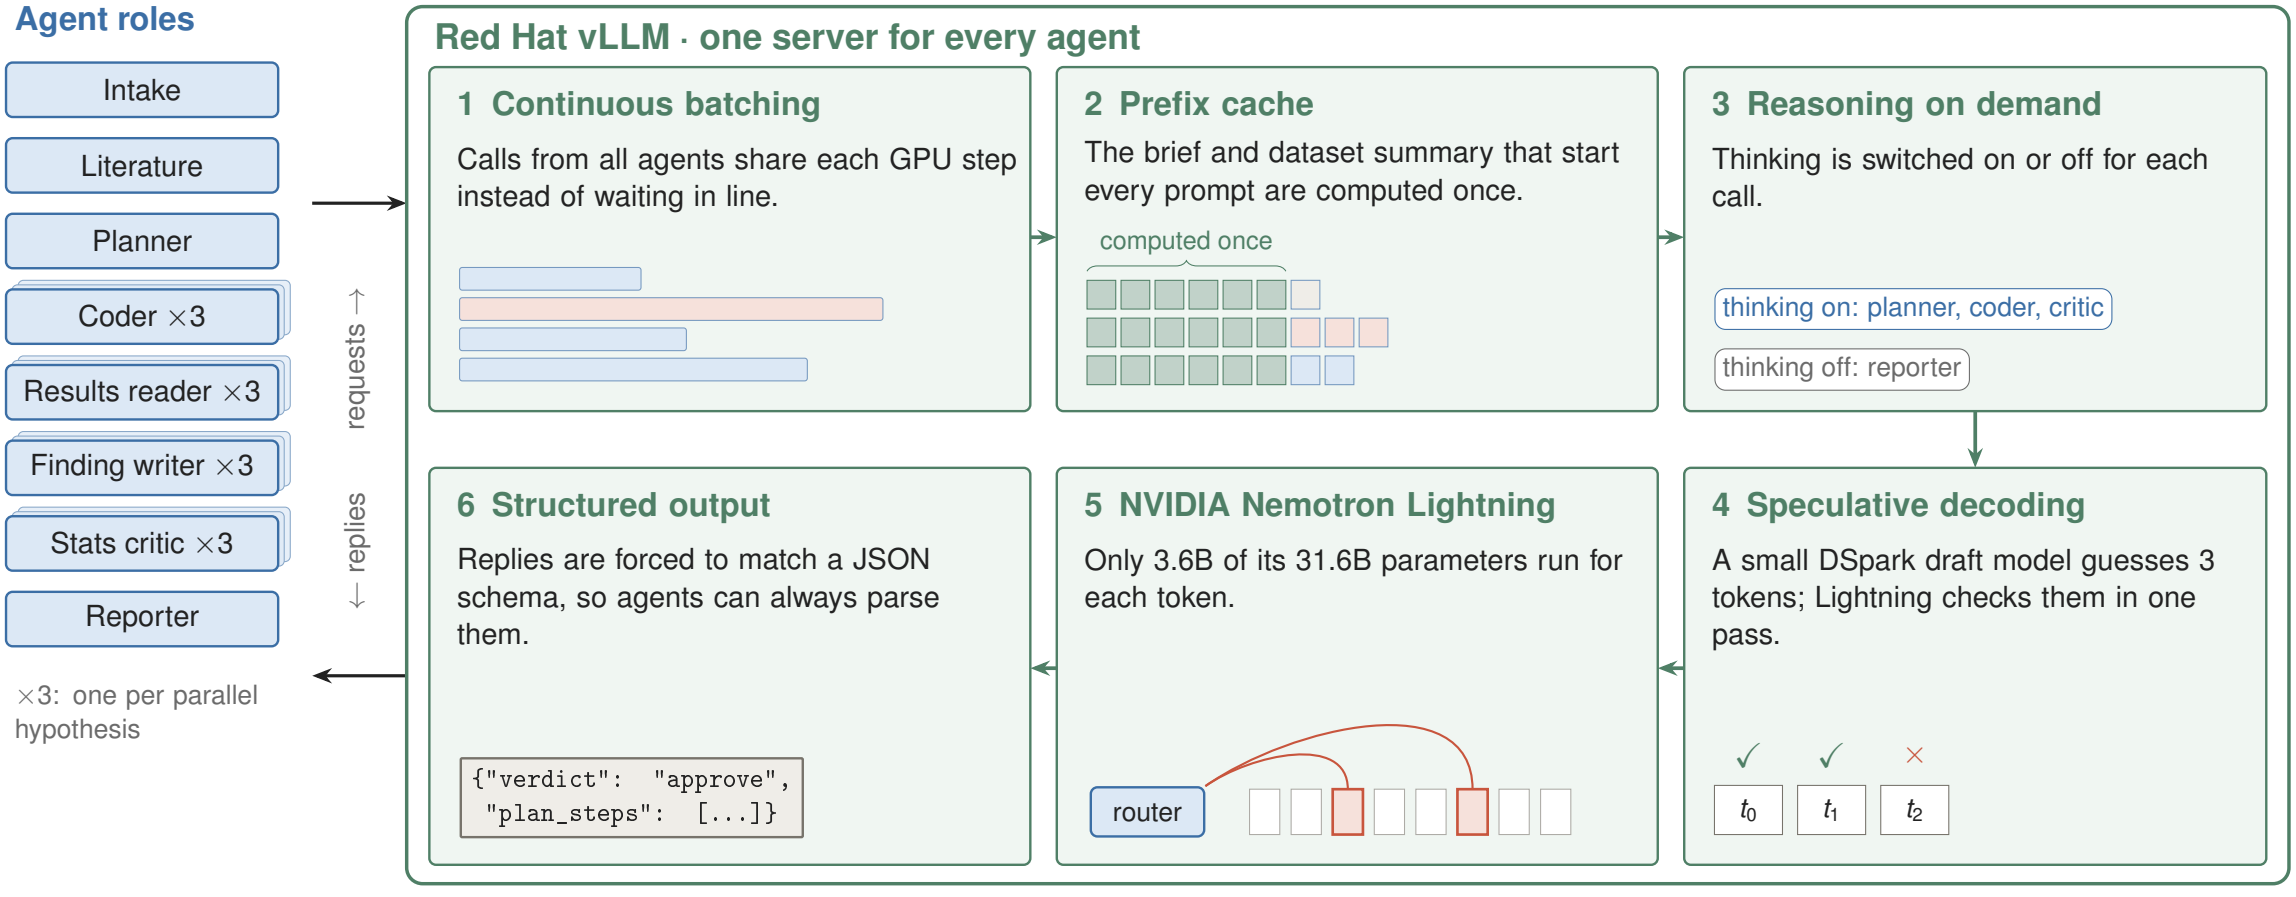

NVIDIA Brev, 1× H100: the whole stack runs on one rented GPU, and the data never leaves it.