


aws ec2 describe-instance:

```
root@e4d554fa1453:/aws# aws ec2 describe-images --owners amazon --filters "Name=name,Values=al2023-ami-*-x86_64" "Name=state,Values=available" "Name=free-tier-eligible,Values=true" --query "sort_by(Images, &CreationDate)[-1].[ImageId,Name]" --output table --region us-east-2
```

DescribeImages	
ami-0a1ff75d5f5ce322c	
al2023-ami-minimal-2023.12.20260909.0-kernel-6.12-x86_64	

Hello From :

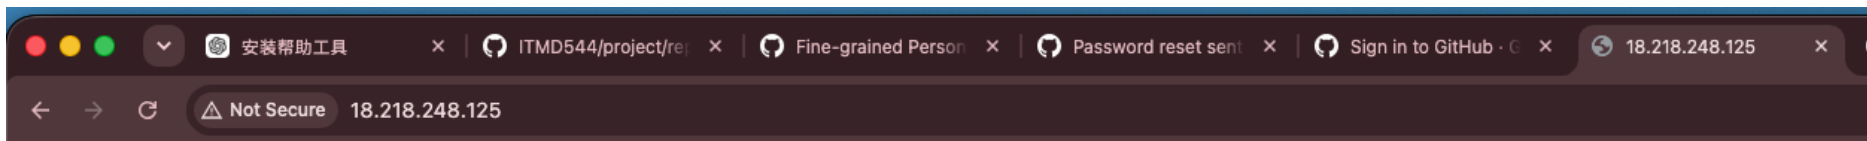

Hello from ip-172-31-47-139.us-east-2.compute.internal

Git status

```
[root@e4d554fa1453:/ITMD544/project/repo# git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean
[root@e4d554fa1453:/ITMD544/project/repo# git check-ignore -v .env
project/repo/.gitignore:1:.env .env
[root@e4d554fa1453:/ITMD544/project/repo# cat .gitignore
.env
[root@e4d554fa1453:/ITMD544/project/repo# date
Sat Sep 12 04:31:46 UTC 2026
root@e4d554fa1453:/ITMD544/project/repo#
```

create_instance.sh

I confirmed and doublechecked , only one instance.

if we need to ,need to change the \$INSTANCE_COUNT in .env to 2.

but nowhere in the lab said 2. so I do not know it is a typo or not.

```
root@e4d554fa1453:/ITMD544/project/repo# ./create_instances.sh
Launching 1 instance(s) in us-east-2...
Launched instance IDs: echo i-002eaae2c8b1590d5
Instance IDs saved to instance_ids.txt
root@e4d554fa1453:/ITMD544/project/repo# cat instance_ids.txt
i-002eaae2c8b1590d5
root@e4d554fa1453:/ITMD544/project/repo# cat ./create_instances.sh
#!/bin/bash
set -e # Exit immediately if any command fails

# Load environment variables
export $(grep -v '^#' .env | xargs)

echo "Launching $INSTANCE_COUNT instance(s) in $AWS_REGION..."

OUTPUT=$(aws ec2 run-instances \
--image-id "$AMI_ID" \
--instance-type "$INSTANCE_TYPE" \
--key-name "$KEY_NAME" \
--security-group-ids "$SECURITY_GROUP_ID" \
--count "$INSTANCE_COUNT" \
--tag-specifications "ResourceType=instance,Tags=[{Key=Name,Value=$NAME_TAG}]" \
--region "$AWS_REGION" \
--query "Instances[*].InstanceId" \
--output text)

echo "Launched instance IDs:" echo "$OUTPUT"

# Save instance IDs to a file so the delete script can find them later
echo "$OUTPUT" | tr '\t' '\n' > instance_ids.txt
echo "Instance IDs saved to instance_ids.txt"
root@e4d554fa1453:/ITMD544/project/repo# echo $INSTANCE_COUNT
1
root@e4d554fa1453:/ITMD544/project/repo#
```

delete_instance.sh

```
[root@e4d554fa1453:/ITMD544/project/repo# ./delete_instances.sh
Terminating instances: i-002eaae2c8b1590d5
{
  "TerminatingInstances": [
    {
      "InstanceId": "i-002eaae2c8b1590d5",
      "CurrentState": {
        "Code": 32,
        "Name": "shutting-down"
      },
      "PreviousState": {
        "Code": 16,
        "Name": "running"
      }
    }
  ]
}
Waiting for instances to terminate...
All instances terminated successfully.
root@e4d554fa1453:/ITMD544/project/repo#
```

explain why env should be in private :

Environment files such as `.env` are excluded from Git because they may contain sensitive information, including passwords, API keys, and AWS credentials. Even a private repository can expose these secrets through collaborators, compromised accounts, or an accidental change to public visibility. Git also preserves file history, so deleting a secret from the latest version does not remove it from earlier commits. Instead, keep `.env` in `.gitignore` and commit a `.env.example` file containing placeholder values so others know which settings are required.