

---

## Table of Contents

Setup paths .....	1
Load data .....	1
Plot raw data .....	1
Plot lfp .....	2
Plot cross correlation .....	3

## Setup paths

```
addpath(genpath(fullfile('~','src','ds_kb','funcs_general')));
addpath(genpath(fullfile('~','src','chronux')));
```

## Load data


```
data_to_load = 3;
s1=load('~/.Dropbox/git/dnsim/data_kramerfull/20150424/data/lfp/job0001_RS-multipli
s2=load('~/.Dropbox/git/dnsim/data_kramerfull_onlyIB/20150424/data/lfp/job0001_IBda
s3=load('~/.Dropbox/git/dnsim/data_kramer_IB/20150424/data/lfp/job0001_IBda-multipl
switch data_to_load
    case 1
        vars_pull(s1);
        chosen_channel = 7;
    case 2
        vars_pull(s2);
        chosen_channel = 4;
    case 3
        vars_pull(s3);
        chosen_channel = 4;
end

vars = {(spec.entities.label)};

t=time;
dt = mode(diff(t));
lfp = lfp';
```

## Plot raw data


```
figure; plot(t,lfp);
legend(vars{:})
```

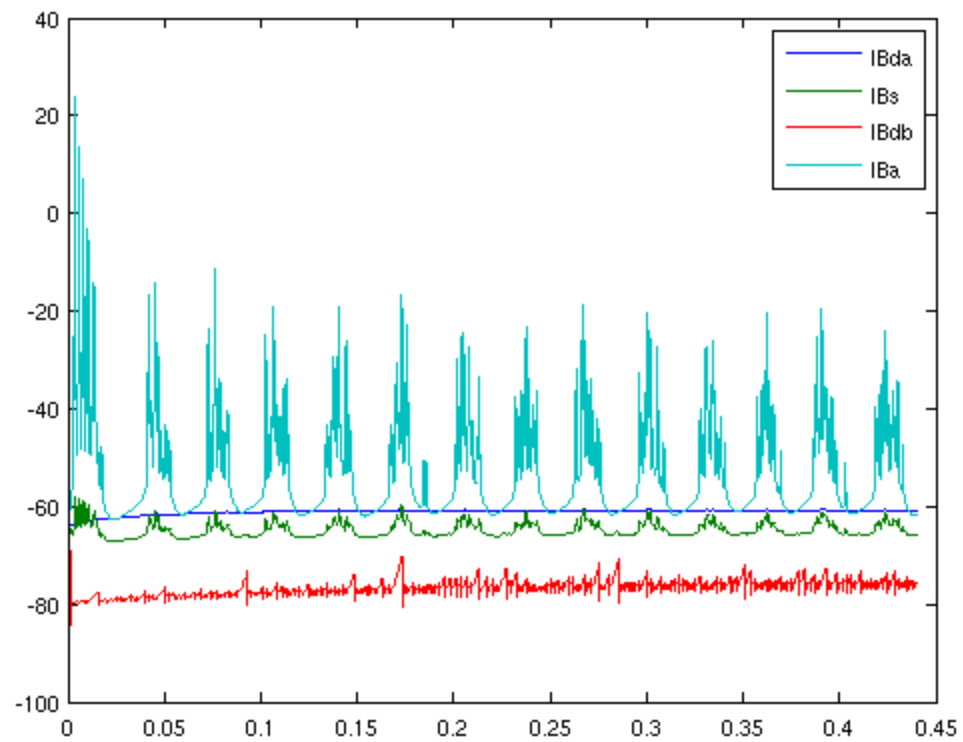

## Plot lfp


```
figure; plott_psd(lfp(:,chosen_channel),'fs',1/dt,'logplot',1,'mode',2)

tapers unspecified, defaulting to params.tapers=[3 5]
ans =
    1.7960e+03
```

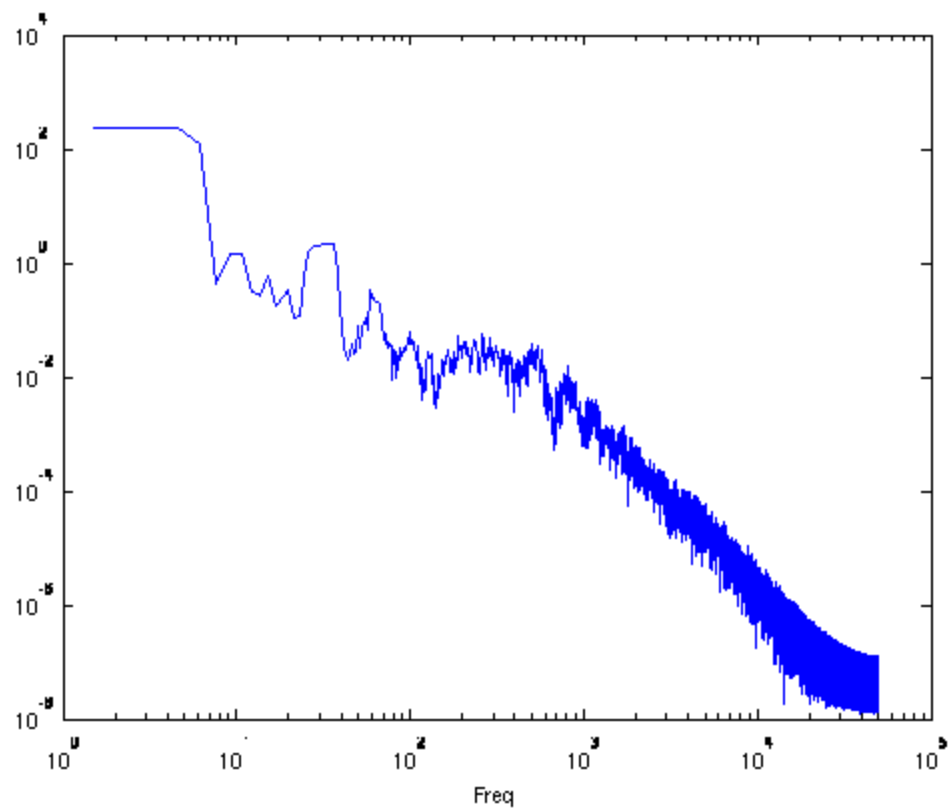

## Plot cross correlation

```
x = zscore(lfp(:,chosen_channel));  
[C,lags] = xcorr(x, 'unbiased');  
  
figure; plot(lags*dt,C)  
xlim([-0.05 0.05]);
```

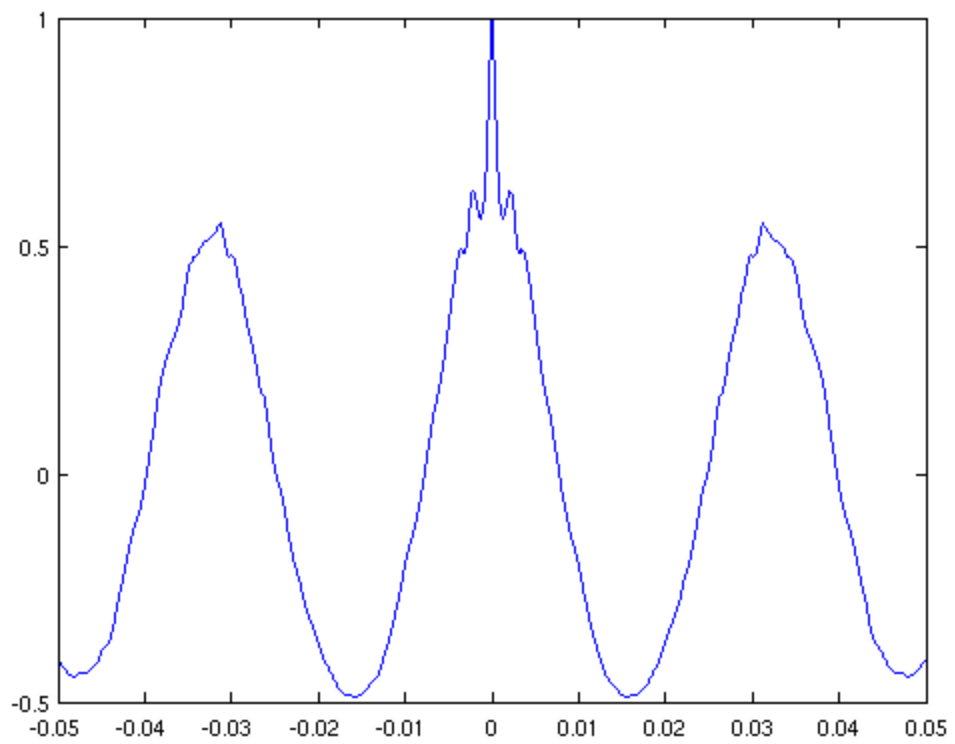

*Published with MATLAB® R2013a*