

Transient Structure as a Sparse-Control Signal: Matched-Budget Graph Selection Before Continual Learning

Jorge Simão

EInnovator R&D — Center for the Sciences of Computation, Cognition, and Complexity

Paper 1 — Controlled Experiment Report — August 2026

Abstract

Transformer inference repeatedly constructs relational statistics that disappear after the request. Before consolidating them into persistent state, we ask whether compact graph features select sparse memory better than score-only rules at matched materialization budgets. A controlled weak-bridge suite establishes mechanism sufficiency: at four chunks, bridge preservation raises quality from 0.297 to 0.627, while a validation-fitted structural selector reaches a generator-specific ceiling. An initial frozen-Qwen3-0.6B natural pilot is directionally positive but inconclusive. We therefore replicate the unchanged selector over three dataset-sampling seeds, 71 unique HotpotQA and 63 unique QASPER test identities, twelve candidates, and 64/128/192 native K/V tokens. Bridge-minus-base mean answer-logprob deltas remain positive in all six cells, but every unique-identity bootstrap interval crosses zero. Structural features reduce held-out candidate-removal R^2 on every seed of both datasets. Neither preregistered branch passes, so the gate for persistent learning remains closed.

1 Question and Evidence Gate

Let $C = \{c_1, \dots, c_n\}$ be candidate chunks with base discovery scores s_i . The question is whether transient structure supplies incremental information about which candidates should be materialized while model weights remain frozen. This is not the claim that training ignores attention: gradients already pass through attention. The narrower hypothesis is that recurrent sample-level structure may provide a useful sparse-control statistic that is normally discarded after inference.

The experiment separates observation, intervention, and learning. Observation constructs compact candidate features. Intervention changes only frozen candidate selection. Learning of prototypes, adapters, or model weights is prohibited in this paper. Online consolidation may begin only after either (i) structural features predict held-out causal candidate utility beyond score and surface controls, or (ii) a structural selector reproducibly shifts the quality-materialization Pareto frontier on natural tasks.

2 Relation to Papers 0–0.6

Paper 0 defines Neural Structural Consolidation and its stop/go criteria. Paper 0.5 supplies recurrent n-gram controls, exact trace locations, and causal predictive-equivalence replacements. Paper 0.6 produces weak hierarchy geometry but fails its held-out completion gate, so none of its semantic/type features can be promoted to Paper 1. Paper 1 therefore asks whether transient graph statistics have *operational* value before treating them as a substrate for continual learning. Geometry, attention weight, and probe performance alone are not accepted as mechanistic evidence.

3 Frozen Sparse-Control Formalization

Materializing $M \subseteq C$ incurs

$$B(M) = \sum_{c_i \in M} |KV(c_i)|.$$

Every primary comparison receives the same candidates and exact chunk budget. For candidate i , the compact feature vector is

$$x_i = [s_i, L_i, S_i, E_i, P_i, A_i, C_i, G_i],$$

where L and S are lexical and semantic discovery controls, E is entropy contribution, P is cross-layer/head persistence, A is rank agreement, C is within-community centrality, and G is cross-community bridge mass. No token-level N^2 attention matrix is retained in traces.

For a diagnostic set with known evidence, removal utility is

$$U_i = Q(C) - Q(C \setminus \{c_i\}).$$

We compare ridge prediction from (s, L, S) against (s, L, S, E, P, A, C, G) on held-out examples. Selector S5 is stricter: it may combine only s with (E, P, A, C, G) , so it cannot silently reweight lexical or semantic discovery channels.

4 Implemented Conditions

ID	Condition
B0	Base score with exact top- k .
B1	Budget-tuned top- k evaluated over the same full budget sweep.
B2	Fixed power sharpening $p'_i \propto p_i^\gamma$.
B3	Entropy-adaptive global sharpening.
S1	Base score plus cross-layer/head persistence.
S2	Base score plus rank agreement.
S3	Base score plus within-community centrality.
S4	Explicit reservation for high-bridge candidates.
S5	Validation-fitted base-plus-structure linear selector.
O1	Oracle evidence ordering, diagnostic upper bound only.

Table 1: Implemented frozen selectors. B0–B3 and S1–S5 obey exact candidate and materialization budgets.

A global monotone transform cannot change exact top- k membership. Consequently B2 and B3 must reproduce B0 under a fixed cardinality budget; this is an algebraic control rather than a failed implementation. Sharpening can matter only with thresholds, variable budgets, sampling, or altered model-native attention, none of which is conflated with this selector test.

5 Controlled Weak-Bridge Suite

Each example contains 24 candidates partitioned into three communities, with two- or three-hop evidence paths, matched 32-token chunks, high/low lexical-overlap regimes, three bridge strengths, six synthetic layers, and four synthetic heads. Evidence candidates receive noisy semantic support, but the indispensable cross-community bridge is down-weighted in the base score and a lexical distractor is strengthened. Validation and test examples have disjoint deterministic identities. Five seeds each contribute 80 validation and 120 test examples, for 1,000 total and 600 held-out scientific units.

Quality combines evidence recall and complete-path recovery:

$$Q(M) = \frac{1}{2} \frac{|M \cap E|}{|E|} + \frac{1}{2} \mathbf{1}[E \subseteq M].$$

Budgets are $k \in \{2, 3, 4, 6, 8\}$ chunks. Reported Qwen-equivalent K/V bytes use eight K/V heads, head width 128, two tensors, and two bytes per element, or 4096 bytes per materialized token. These are accounting-equivalent bytes, not a measured native materialization run.

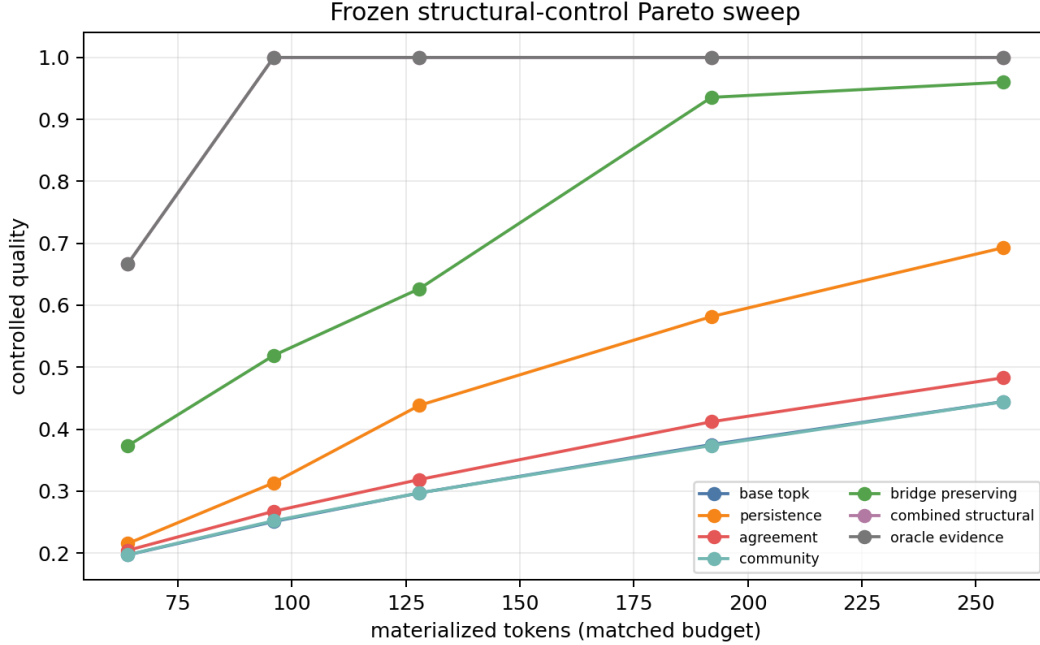


Figure 1: Controlled quality versus exactly matched materialized tokens. The oracle is diagnostic. Structural gains occur because the generator contains a known cross-community bridge mechanism.

6 Frozen-Qwen Residualized Audit

The available PRA artifact retains layerwise graph summaries, but intentionally omits its 7.8 GB candidate tensor cache. We therefore perform an observational audit rather than reconstructing a candidate-selection result. The source contains 672 rows from 84 identity-disjoint 2WikiMultiHopQA and MuSiQue examples, each measured at layers 0, 4, 8, 12, 16, 20, 24, 27 of frozen Qwen3-0.6B revision `c1899de`. . . . Validation identities fit the models; test identities evaluate them.

The target is the fraction of layers with complete native graph recovery, aggregated to one row per example before evaluation. Surface controls are candidate/parent count, annotated hops, graph density, layer, dataset, and graph type. Added structural predictors are duplicate-neighbor rate, reciprocal-edge rate, effective branching factor, unique neighbors, shortcut rate, giant-component fraction, and mean out-degree. This analysis is predictive and identity-disjoint, but not causal: it has neither candidate removal outcomes nor task-generation quality.

7 Natural Candidate-Level Intervention

We regenerate candidate features directly from frozen Qwen3-0.6B revision `c1899de`. . . . The diagnostic slice contains eight validation and eight test identities from each of HotpotQA and QASPER. Hotpot identities are examples; QASPER identities are papers, with at most one question per paper, so no paper crosses the split. Each example supplies twelve fixed 32-token candidates. Five depth samples and four channel groups produce compact query–candidate scores and candidate similarities; traces retain derived persistence, agreement, communities, and bridge mass, never full attention matrices.

Selection uses budgets of 64, 128, and 192 tokens. Selected tokens are passed through the model’s native causal prefill with `use_cache`; K/V bytes are counted from the resulting tensors. These budgets materialize 7.34, 14.68, and 22.02 MB respectively. The primary quality endpoint is mean target-answer token log probability under the frozen model. Evidence recall and complete evidence recovery are diagnostics. Candidate-removal utility is computed on one predeclared validation and test example per dataset because each candidate requires another native forward pass.

8 Results

Condition	Quality	Evidence recall	Path complete	Bridge recall
base topk	0.297	0.526	0.068	0.102
power sharpen	0.297	0.526	0.068	0.102
persistence	0.438	0.657	0.220	0.262
agreement	0.319	0.551	0.087	0.122
community	0.297	0.526	0.068	0.102
bridge preserving	0.627	0.774	0.480	0.785
combined structural	1.000	1.000	1.000	1.000
oracle evidence	1.000	1.000	1.000	1.000

Table 2: Controlled test performance at four 32-token chunks. The oracle is diagnostic only. All non-oracle conditions receive identical candidates and budgets.

At four chunks, explicit bridge preservation increases quality by 0.330 and complete-path rate by 0.412 over B0. Persistence also helps, but agreement is small and community centrality alone is identical to B0 at this operating point. S5 reaches the oracle ceiling from three chunks upward and also matches its quality at two chunks. This ceiling is a generator diagnostic: validation and test share the same structural mechanism, so it is not evidence of natural-task generalization.

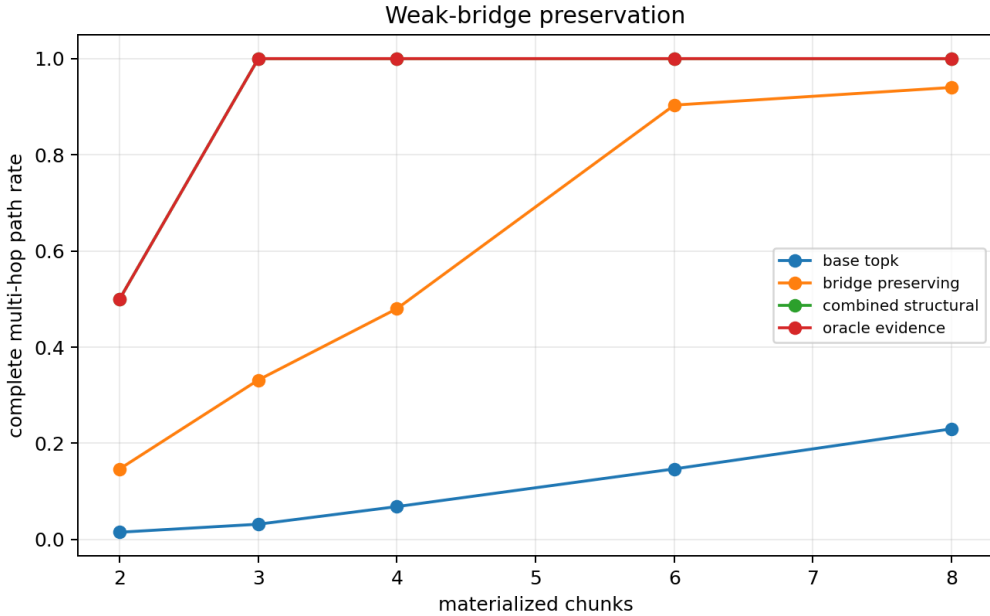


Figure 2: Complete evidence-path recovery across the budget sweep. Explicit bridge reservation prevents the weak-link failure induced by score-only selection.

Candidate removal provides exact causal utility in the controlled generator. Averaged across five held-out seeds, adding structural features raises Spearman from 0.486 to 0.528 and R^2 from 0.429 to 0.891. The result supports H1 only inside the controlled mechanism.

In the frozen-Qwen audit, surface-control Spearman is -0.027 and the structural model reaches only -0.005 . Corresponding R^2 values are -0.352 and -0.348 . The improvement is negligible and both models underperform the test-set mean. Retaining this negative result prevents observational graph richness from being mistaken for predictive utility.

Dataset	Budget	Base	Bridge	Paired delta (95% CI)
HOTPOTQA	64	-5.308	-4.223	+1.086 [-0.688, +2.943]
HOTPOTQA	128	-4.446	-4.033	+0.413 [-0.497, +1.710]
HOTPOTQA	192	-4.157	-3.517	+0.640 [-0.210, +1.846]
QASPER	64	-4.141	-3.599	+0.542 [-0.021, +1.363]
QASPER	128	-3.750	-3.739	+0.011 [-0.003, +0.035]
QASPER	192	-3.171	-2.668	+0.503 [-0.042, +1.550]

Table 3: Frozen-Qwen natural candidate intervention. Quality is mean answer-token log probability; all budgets use measured native K/V.

Bridge preservation improves the mean at all six natural operating points. On HotpotQA its paired answer-logprob deltas are +1.086, +0.413, and +0.640 at 64, 128, and 192 tokens. QASPER deltas are +0.542, +0.011, and +0.503. The pattern is directionally consistent, and evidence recall generally rises, but all paired intervals cross zero. S5 does not inherit the synthetic ceiling: its deltas are negative in five of six cells. On removal utility, adding structure changes HotpotQA Spearman from -0.385 to 0.021 while worsening R^2 from -0.135 to -5.391 ; on QASPER it changes Spearman from 0.161 to -0.028 and R^2 from -0.265 to -1.661 . These small diagnostic removal subsets do not support incremental causal prediction.

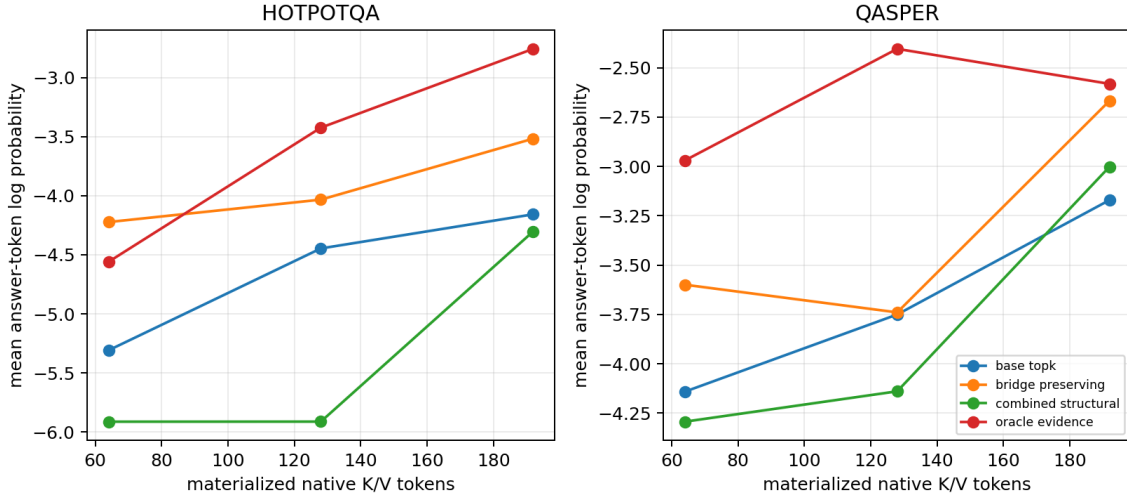


Figure 3: Natural frozen-Qwen quality versus measured native K/V tokens. Bridge means exceed B0 throughout, but paired uncertainty includes zero; S5 fails to generalize reliably.

8.1 Three-seed natural replication

We next freeze the pilot protocol rather than redesigning it: Qwen3-0.6B revision `c1899de...`, twelve candidates, the same ten selectors and eight candidate features, native K/V materialization, and the same three budgets. Sampling seeds 20260906, 20260917, and 20260929 each contribute 24 validation and 24 test identities per dataset. Cross-seed reuse leaves 71 unique HotpotQA and 63 unique QASPER test identities; repeated evaluations are averaged within identity before the paired bootstrap.

All six bridge-minus-base means remain favorable, but uncertainty still includes zero. HotpotQA deltas are +.197 [-.337, +.731], +.359 [-.091, +.838], and +.227 [-.060, +.523] at 64, 128, and 192 tokens. QASPER deltas are +.309 [-.065, +.713], +.024 [-.198, +.279], and +.164 [-.024, +.413]. The replication therefore preserves the pilot’s direction without establishing a reproducible matched-budget frontier shift.

Dataset	Tokens	Bridge-base Δ	95% CI
HOTPOTQA	64	+0.197	[-0.337, +0.731]
HOTPOTQA	128	+0.359	[-0.091, +0.838]
HOTPOTQA	192	+0.227	[-0.060, +0.523]
QASPER	64	+0.309	[-0.065, +0.713]
QASPER	128	+0.024	[-0.198, +0.279]
QASPER	192	+0.164	[-0.024, +0.413]

Table 4: Three-seed replication pooled by unique held-out identity. Repeated identities across sampling seeds are averaged before the paired bootstrap.

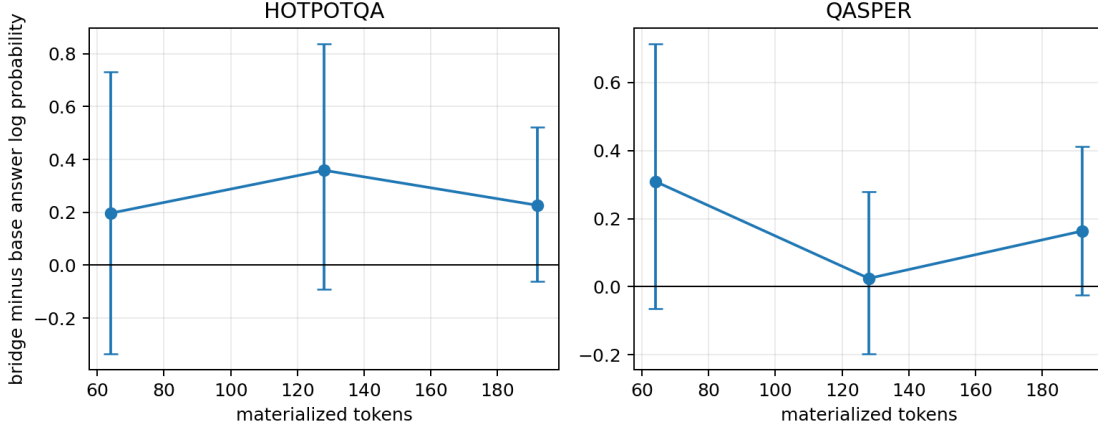


Figure 4: Preregistered three-seed bridge-minus-base frontier. Error bars are identity-bootstrap 95% intervals after averaging any repeated frozen identity across sampling seeds. All intervals cross zero.

The expanded candidate-removal diagnostic is also negative. Structural-minus-surface held-out R^2 is negative for all three seeds on both datasets: mean -0.398 on HotpotQA (range -0.597 to -0.081) and -0.83652 on QASPER (range -0.249079 to -0.520). The extreme QASPER magnitude indicates unstable out-of-sample regression, not strong negative causal structure. Crucially, zero of three seeds is positive in either dataset, so the registered incremental- R^2 branch fails without relying on an interval convention.

8.2 Frozen functional-equivalence feature audit

We revisit the 48 native-removal rows without rerunning or tuning the frozen model. Paper 0.5 functional membership cannot be reconstructed because candidate-conditioned output distributions were not retained; we therefore label its agreement-persistence-entropy combination a *dynamical proxy*, not predictive equivalence. Paper 0.6 semantic/type features are deliberately unavailable because every Paper 0.6 run failed its held-out competence gate. This prevents a geometric failure artifact from silently becoming a Paper 1 input.

On HotpotQA, the surface-only model has held-out Spearman -0.385 and $R^2 = -0.135$. Adding recurrence, structure, the predictive proxy, or the combined functional-role feature leaves R^2 negative (-1.018 , -5.391 , -0.890 , and -0.714). On QASPER, the predictive proxy improves rank correlation from 0.161 to 0.517 , but R^2 worsens from -0.265 to -1.370 ; the functional-role model reaches Spearman 0.343 with $R^2 = -3.325$. Thus no feature family predicts marginal utility beyond the test-set mean on both tasks. This is the preregistered second natural causal null: consolidation remains stopped, and greater learner flexibility is not an acceptable response.

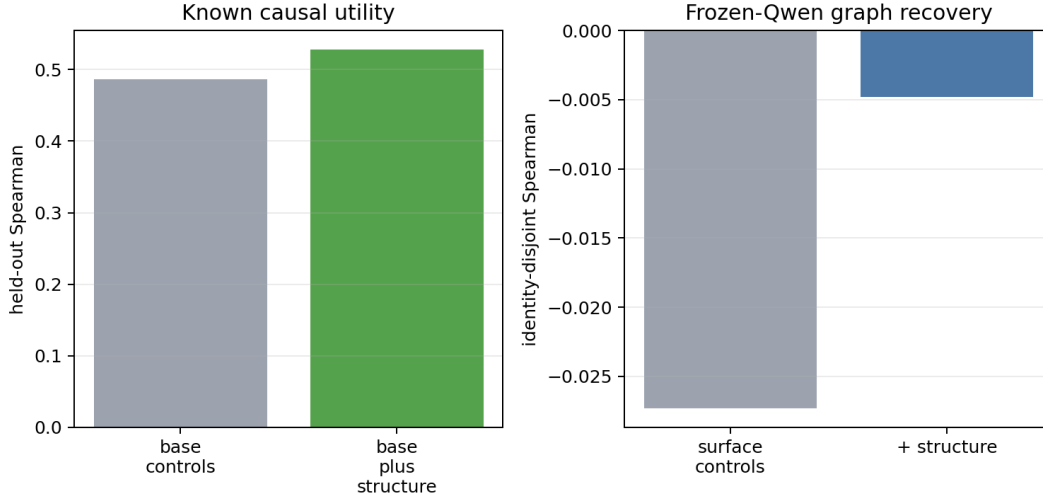


Figure 5: Left: controlled candidate-removal utility. Right: observational pretrained graph recovery after identity-disjoint fitting. Structural prediction is positive only in the known synthetic mechanism.

9 Series-Level Interpretation

The four-paper sequence supports a coherent but deliberately narrowing account. Paper 0 defines an evidence ladder in which recurrence and geometry are observations, interventions establish causal relevance, and persistence requires held-out utility. Paper 0.5 then shows why that separation matters: externally defined same-family replacements preserve predictions whereas nonequivalent replacements disrupt them, while motif specificity remains unrelated to SA causal contribution ($\rho = -0.009$). Paper 0.6 supplies the complementary warning: hierarchy-neighbor recovery exceeds permutation (0.477 versus 0.254) even though every run fails held-out completion competence. Its semantic geometry is therefore a negative control, not an abstraction feature.

Paper 1 supplies the first direct sparse-control test. It shows that task-conditioned aggregate structure can matter: reserving a weak cross-community bridge changes the controlled frontier, whereas monotone score sharpening cannot alter exact top- k membership. The natural pilot and larger replication give the same weaker pattern: bridge means move favorably on both tasks, but unique-identity uncertainty and removal-prediction failure prevent a gate pass. The combined interpretation is therefore not that attention motifs become latent symbols or that abstraction rises monotonically through depth. Recurrent computation exposes candidate summaries whose utility is conditional on task, budget, and outcome; favorable averages across three sampling seeds are still not a persistent-learning signal.

This distinction also explains the stop decision. The candidate-level experiment and its preregistered replication close the instrumentation and sampling-scale gaps posed here, but not the evidential one. Expanding to a persistent learner would therefore evade rather than satisfy the registered criterion.

10 Systems Discipline

All selectors enforce exact cardinality; both artifact families report zero budget violations. Natural traces contain candidate, selection, and evidence IDs and explicitly record that full attention is not retained. Unlike the controlled accounting estimate, the natural study separately records selector time, native K/V prefill time, end-to-end answer scoring, materialized tensor bytes, and device allocation. These research-code timings are not production serving claims.

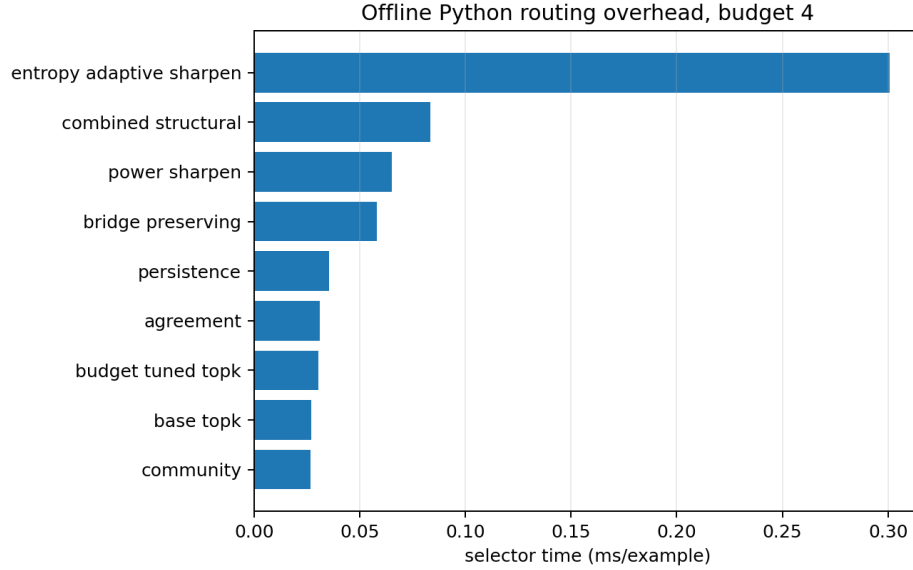


Figure 6: Research-code selector overhead at four chunks. Times measure CPU Python selection only and are not end-to-end PRA latency.

The implementation is opt-in. With NSC disabled, the adapter boundary calls exact base top- k and changes neither scores nor candidate membership. Deterministic component labels, bridge scores, sharpening monotonicity/normalization, budget enforcement, trace compactness, and disabled parity are covered by tests.

11 Decision Gate and Falsification

The controlled suite supports H1–H3 only under its explicit generator. The natural intervention and three-seed replication satisfy the engineering requirements—candidate regeneration, identity separation, actual K/V materialization, equal budgets, task quality, and removal diagnostics—but not the registered evidence gate. Frontier evidence fails on both datasets because every unique-identity interval includes zero. Causal prediction also fails on both because structural-minus-surface R^2 is negative on all six dataset–seed cells. The authoritative disjunction therefore yields `persistent_learning_gate=0`. Online prototypes, adapters, override tests, and rollback experiments remain blocked; no test-set tuning or learner expansion is justified.

12 Reproducibility and Provenance

The exact command is

```
python -m cl.experiments.paper1_structural_control
PYTHONPATH=src python -m cl.experiments.paper1_natural_gate
PYTHONPATH=src python -m cl.experiments.paper1_equivalence_gate
PYTHONPATH=src python -m cl.experiments.paper1_natural_replication_analyze
```

The manifests record resolved configuration, exact model/tokenizer revision, identities, cache hashes, package versions, device/dtype, and artifact hashes. Each replication seed passes an independent completion audit with 1,440 selector rows, 288 removal rows, 1,152 candidate records, and 1,440 selection traces; pooled analysis contains 4,320 selector rows. The complete-only analyzer rejects protocol drift, missing seeds, raw-count drift, identity leakage, or an incomplete selector grid and records the frozen configuration hash `d89d2cec...`. The equivalence audit remains separate and changes no model state.

13 Limitations

The controlled generator encodes the mechanism that structural features are designed to detect; its perfect S5 ceiling is diagnostic. The replication increases the natural test sample to 71 unique HotpotQA and 63 unique QASPER identities across three sampling seeds, but retains one model size, twelve fixed candidates, coarse paragraph-derived evidence labels, six removal identities per split and seed, and answer likelihood rather than full answer generation. Its channel groups summarize representation subspaces rather than literal attention heads. Native K/V and latency are measured on Apple MPS research code rather than an optimized serving stack. These constraints bound the null: they do not prove that graph structure can never help, only that the frozen registered intervention is not reproducibly useful here.

14 Conclusion

Transient graph structure is an effective frozen sparse-control signal when weak bridges are known to be causal. On natural HotpotQA and QASPER candidates, bridge reservation improves all six mean matched-budget endpoints in both the pilot and replication, but every unique-identity interval includes zero and structural removal-utility prediction worsens R^2 on every seed. Paper 1 therefore contributes a reusable selector/trace/materialization framework, a positive controlled mechanism test, a replicated directional pattern, and a firm preregistered stop decision: do not consolidate without reproducible natural utility.

References

- [1] A. Behrouz, P. Zhong, and V. Mirrokni. *Titans: Learning to Memorize at Test Time*. arXiv:2501.00663.
- [2] Y. Sun et al. *Learning to (Learn at Test Time): RNNs with Expressive Hidden States*. arXiv:2407.04620.
- [3] I. Schlag, K. Irie, and J. Schmidhuber. *Linear Transformers Are Secretly Fast Weight Programmers*. arXiv:2102.11174.
- [4] T. Munkhdalai, M. Faruqui, and S. Gopal. *Leave No Context Behind: Efficient Infinite Context Transformers with Infini-attention*. arXiv:2404.07143.