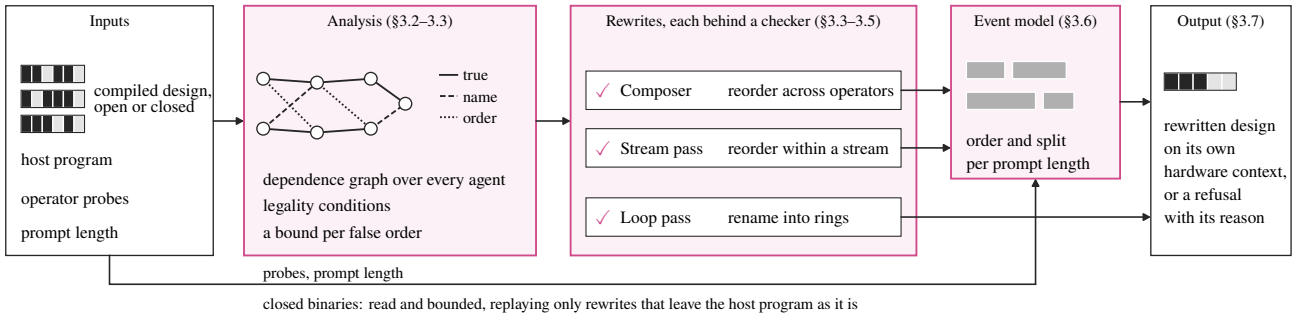

Inputs
compiled design, open or closed
host program
operator probes
prompt length
Analysis (§3.2–3.3)
true
name
order
dependence graph over every agent
legality conditions
a bound per false order
Rewrites, each behind a checker (§3.3–3.5)
Composer reorder across operators
Stream pass reorder within a stream
Loop pass rename into rings
Event model (§3.6)
order and split per prompt length
Output (§3.7)
rewritten design on its own hardware context, or a refusal with its reason
probes, prompt length
closed binaries: read and bounded, replaying only rewrites that leave the host program as it is