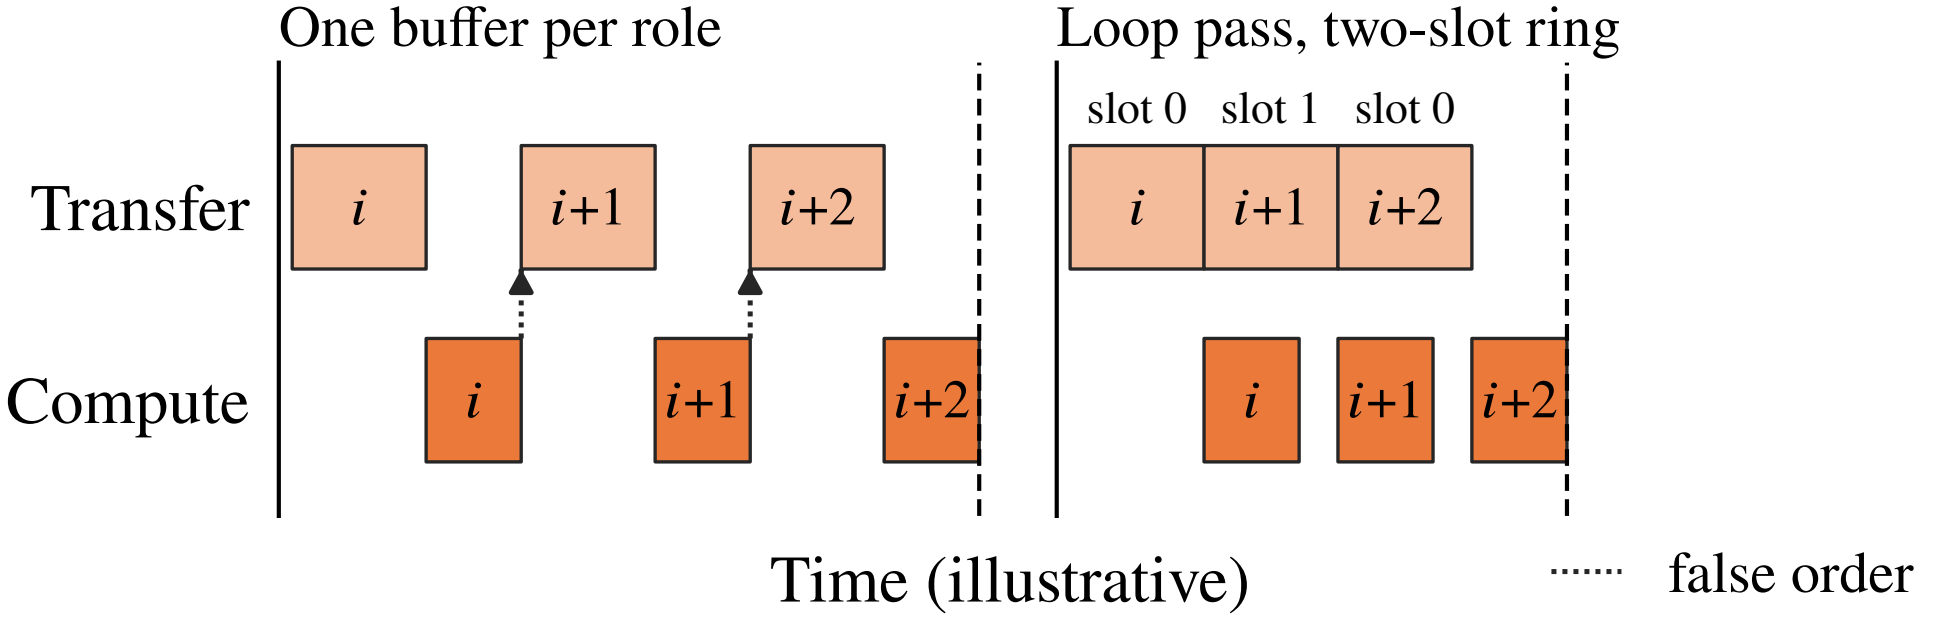

One buffer per role
Loop pass, two-slot ring
slot 0
slot 1
slot 0
Transfer
Compute
i
i+1
i+2
i
i+1
i+2
i
i+1
i+2
Time (illustrative)
false order