


Tries

A *trie* is a type of tree used for storing text for easy retrieval. Trie is pronounced like “tree” or like “try,” depending on whom you ask. The name comes from the middle letters of “retrieval”. If we want to store the list of words *AD*, *AN*, *ANY*, *CAB*, *CAN* in a trie, it would look something like this:

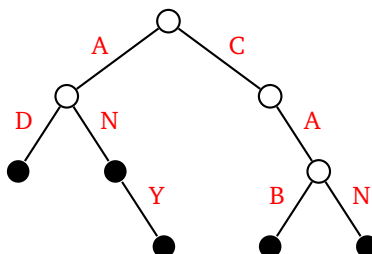

Each edge of the trie represents a letter. Nodes represent the concatenation of all the letters leading from the root to the node. Leaf nodes and sometimes nodes in the middle of the trie store complete words. We use filled-in circles above to represent these nodes.

It’s relatively quick to code up a trie class in Python. Here’s one:

```
class Trie:
    def __init__(self, is_word=False, links=None):
        self.is_word = is_word
        self.links = {} if links is None else links

    def add(self, word):
        n = self
        for c in word:
            if c not in n.links:
                n.links[c] = Trie()
            n = n.links[c]
        n.is_word = True
```

It’s a recursive class since each node in the trie is a trie itself. The class has a boolean variable to keep track of whether a node represents a complete word or not. To tell which nodes are adjacent to which, we use a dictionary whose keys are letters. In the trie shown earlier, the root node would have `is_word` set to false, and its `links` dictionary would have entries for *a* and *c*, each of those pointing to another node. The `add` method starts at the top of the trie and works its way down, following the individual letters in the word and moving down the trie by following the `links` dictionary.

The most common operation on a trie is to find all the words starting with a given prefix. Here is code we can add to our class to that:

```
def starting_with(self, prefix):
    n = self
    for c in prefix:
        if c not in n.links:
            return []
        n = n.links[c]
    return self.all_below(n, prefix)

def all_below(self, n, s):
    M = [s] if n.is_word else []
    if n.links == {}:
        return M
    for c in n.links:
```

```
M.extend(self.all_below(n.links[c], s+c))  
return M
```

The `starting_with` method walks down the trie following the characters in the prefix. It then calls the recursive `all_below` method that finds all complete words located at or below a given node.

Once the trie is created, lookups depend only on the size of the word, not on the size of the dictionary. This is very fast, but there is a cost for this speed, and that comes in the amount of memory required for the trie. However, there are various things that can be done to make tries more space efficient.

Tries have a variety of uses. One use is for implementing an autocomplete feature. With that, you type in a few letters (a prefix), and you want all the words that start with those letters, which is exactly what the `starting_with` method returns. Another use is in IP routing, where the next hop a packet should take is based on the first so many bits (a prefix) of its destination IP address.