

# Chapter 4

Key exchange protocols

Cryptographic hash functions, MACs

Digital signature

# Key exchange protocols

RSA Key Exchange

DHE

ECDHE

# What are Key Exchange protocols?

In TLS and also secure email data is encrypted with symmetric block cipher AES

Before encryption with AES starts, the symmetric key must be agreed between the communicating parties. For this there exists three commonly used algorithms, which are called key exchange protocols

- **RSA Exchange** has been the most common method in the past years
- **ECDHE** has replaced RSA Exchange in many TLS connections
- **DH Exchange** is the third option, which has been common for example in secure video negotiations encrypted with AES

**DHE** = Diffie Hellman key Exchange

**ECDHE** = Elliptic Curve Diffie Hellman key Exchange

# RSA key exchange

**One of the communicating parties creates a random symmetric key and sends a copy to the other party encrypted with RSA**

## Possible security issues

- 1. If the hacker manages to factor recipients public RSA key, he may get from the key exchange messages the AES keys of present and future sessions.** (RSA public keys are permanent and remain the same at least for the time when servers certificate is valid)
- 2. Authorities** could require companies to give private RSA keys of their servers to officials.

# Diffie – Hellman key exchange

**System parameters:** Large (2048 bit) prime **p** and a generator **g** (base for exponentiation)

Alice creates a random private key **a**



Bob creates a random private key **b**

A calculates  $Y_a$  using **a** as exponent and sends  $Y_a$  to Bob in unsecure channel

$$Y_a = g^a \bmod p$$

$$Y_b = g^b \bmod p$$

B calculates  $Y_b$  using **b** as exponent and sends  $Y_b$  to Alice in unsecure channel

A calculates key K:

$$\begin{aligned} K &= Y_b^a \bmod p \\ &= (g^b)^a \bmod p \\ &= g^{ab} \bmod p \end{aligned}$$

B calculates key K:

$$\begin{aligned} K &= Y_a^b \bmod p \\ &= (g^a)^b \bmod p \\ &= g^{ab} \bmod p \end{aligned}$$

Both use their own private keys to calculate symmetric key **K** from the messages they have received

DH is in a way more secure than RSA exchange, because new **a** and **b** are created in every session. If the hacker manages to break one session, it does not help to break the next.

## System parameter $g$ is called generator. What does it mean

In DH exchange number  $g$  must fulfill condition that the powers  $1, \dots, p-1$  of  $g \pmod{p}$  generate all the elements of  $\mathbb{Z}_p$  ( $\mathbb{Z}_p = \{1, 2, \dots, p-1\}$ ).

There exists a lot of possible generators  $g$ . It can be shown that number of possible generators is  $\phi(p-1)$ , where  $\phi$  on ns. Euler's totient function. For example if prime modulus  $p = 200183$ , there exists  $\phi(200182) = 99000$  possible generators  $g$

WolframAlpha: EulerPhi(200182)

# Security of DHE is based on Discrete Logarithm Problem

A hacker can get the public messages  $Y_a = g^a \bmod p$  and  $Y_b = g^b \bmod p$  by listening the unsecure channel, but he cannot solve private keys **a** and **b** from these number.

Solving exponent  $x$  from  $y = g^x \bmod p$  is as hard as factoring large integers in RSA


**DLP = " Discrete Logarithm Problem"** is the name of this "hard problem", which is behind the security of DHE.

**DLP: Solve integer  $x$  from  $y = g^x \bmod p$ , where integers  $y$ ,  $g$  and prime  $p$  are given**

**Usual recommendation for secure size of  $p$  is 2048 bits**

# ECDHE Elliptic Curve Diffie Hellman Exchange

A recent new choice for key exchange is ECDHE , which has replaced RSA exchange in many web services (for example in some Finnish banks)

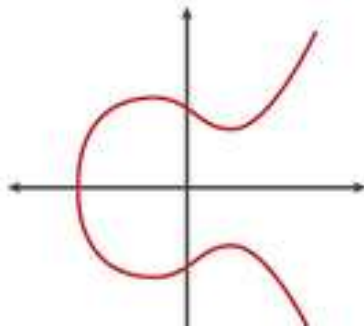

**Elliptic curves** used in ECC are curves

$$y^2 = x^3 + a x + b$$


If P and Q are points of the curve, it is possible to define an addition operation which gives a third point of the curve called the sum  $P + Q$

In ECC cryptography discrete elliptic curves are used. Discrete curve consists of integer pairs  $(x,y)$  , which satisfy equation  $y^2 = x^3 + a x + b \pmod{q}$  where a and b are integers and modulus q is prime.



# Example and graph of a discrete elliptic curve

Equation  $y^2 = x^3 + 2x + 4 \pmod{61}$ , where  $0 < x, y < 60$

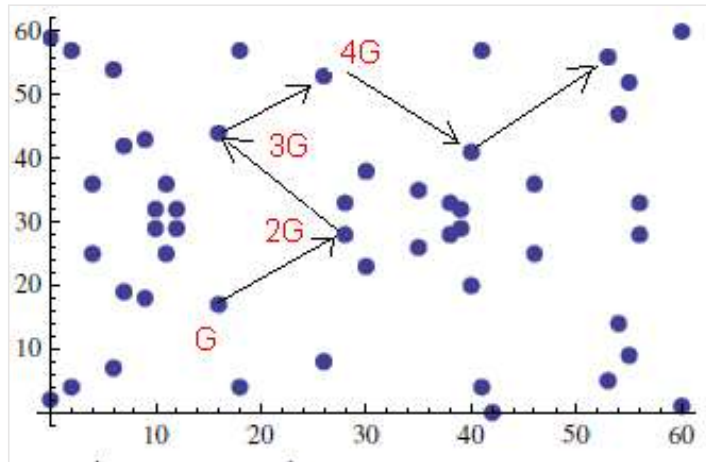

In this course manual calculations are not required.

Some points of the curve are generating elements. One of them is  **$G = (2, 4)$**

The multiples of  $G$  generate all points of the curve  $\{G, 2G, 3G, \dots, 60G, O\}$

Points of curve  $y^2 = x^3 + 2x + 4 \pmod{61}$

Formulas of addition  $P + Q$

$$k = (y_2 - y_1) \cdot (x_2 - x_1)^{-1} \pmod{q}$$

$$x_{P+Q} = k^2 - x_1 - x_2 \pmod{q}$$

$$y_{P+Q} = y_1 - k(x_{P+Q} - x_1) \pmod{q}$$

# ECDHE key exchange

## Curve and G are given as system parameters


1. Alice chooses random private key **a** and sends Bob its multiple point **aG** in unsecure channel

2. Bob chooses random private key **b** and sends Alice its multiple point **bG** in unsecure channel

3. Both calculate the symmetric key (  $K = \text{points } abG$  )

Alice:  $K = a(bG)$

Bob:  $K = b(aG)$

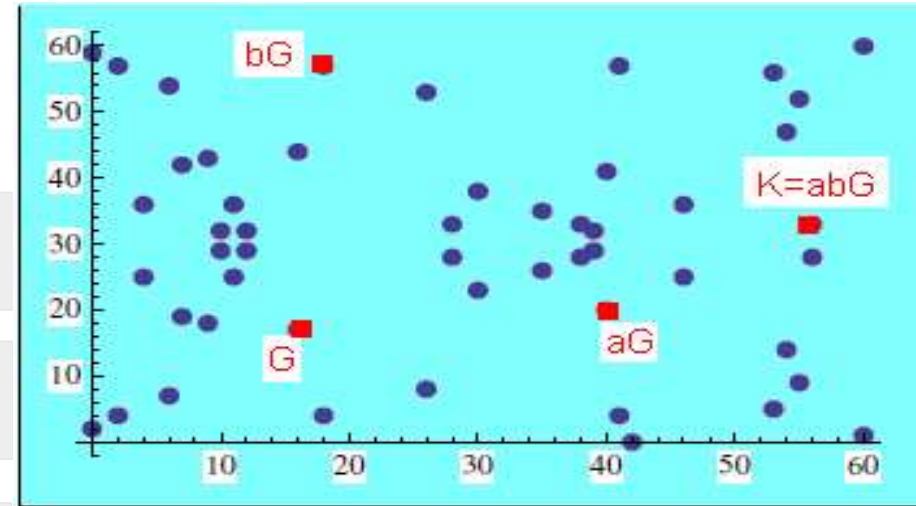

**TLS** uses standard curves, where modulus  $q$  has at least 250 bits and nr of points is likewise

**Security:** The hacker can listen the channel and read points  $aG$  and  $bG$ , but is not able to calculate private keys  $a$  and  $b$

**Solving  $x$  from  $xG$  is called ECDLP , "Elliptic curve Discrete Logarithm Problem" .**

It is a similar "Hard Problem" of mathematics as factoring behind RSA

# Concepts:

## Protocol

is a [standard](#), which defines or makes possible connections between devices or software. One party sends a message to the other party, who reacts to the message and possibly answers according to the protocol.

## Key exchange protocol

= standard for agreeing on symmetric key

**DLP** = mathematically hard problem, which is the basis of security of Diffie Hellman Exchange

**ECDLP** = mathematically hard problem, which is the basis of security of ECDHE exchange

Cryptographic hash  
functions and MAC's

Digital signature

# Hash functions

Definition: Hash functions are one-way functions, which produce a fixed length digest from the message

## Uses of hash functions:

1. Hash value **ensures the integrity of data transmission** (that data is not changed during transmission).
2. **Password files** of servers do not store passwords, but their **hash values**
3. **Digital signature** is calculate using hash value of message as input .
4. **Checksums** are shorter hash values, which for example antivirus software calculates for folders and files.

Hash values are also called "message digests"

# Requirements for a secure hash function

Notation: Hash function is  $h(m)$ , where argument  $m$  is message

1.  $h(m)$  is a **one-way function**. It must not be possible to calculate the message  $m$  from its hash value  $h(m)$ .
2. **Collision resistance 1**. If the hash  $h(m_1)$  for one message  $m_1$  is known, it should be impossible to generate another message  $m_2$  with same hash value. (Other messages surely exist, but there should be no method for finding them)
3. **Collision resistance 2**. It should be impossible to generate two messages  $m_1$  and  $m_2$  with same hash value.

# Some known hash functions



"Chinese Xiaoyun Wang broke in 2005 almost all hash functions in sight - and paradoxally the community of cryptographers loved it"

Chinese scientist in 2005 showed the vulnerability of many common hash functions by showing how to generate another message with a given hash value

- **MD5** - **broken**
- **SHA-1 (160 bit)** - **not recommended**
- **Following hash functions are regarded as safe**
- **SHA256**
- **SHA384**
- **SHA512**

Example of  
SHA256

```
Hash["Tämä on koeviesti, josta lasketaan tiiviste","SHA256"]  
32134986657396586487192643852384396035054468584117070131813446773863278924851
```

# Secure hash length and "birthday paradox"

The length of secure hash should have 2 x key length of secure block cipher

Reason is "birthday paradox"

What is the minimum number of students in the class, in which there is > 50% probability that the class has two students with the same birthday? Answer: 23

The calculation of probability confirms the result

$$P = 1 - \prod_{k=1}^{23} \frac{365 - k + 1}{365} = 0.51$$

Similar calculation can be done for probability of collisions of hash values:

If the size of "hash space" is  $n$ , there will be collisions at probability of 50% among  $\sqrt{n}$  hash values

=> The number of 256 bit hashes is  $2^{256}$ . The square root is  $2^{128}$  which is the number of hashes where appears collision at >50% probability.



# MAC -functions

MAC = message authentication code

- MAC = hash function with symmetric key  $K$  as extra input in addition to message  $m$
  - MAC ensures not only the integrity of message, but also authenticates the sender of message
- \* MAC is use in the same way as digital signatures at the end of transmitted data packets to quarantee integrity and sender's authenticity

# HMAC-SHA

= most common MAC which is calculated from message  $m$  and symmetric key  $K$

$$\text{HMAC}(K, m) = \text{sha}(K \oplus \text{opad} || \text{sha}(K \oplus \text{ipad} || m))$$

$\oplus$  = XOR sum

$K$  = symmetric key

Ipad and Opad are 64 bit constants, in hexadecimal form

Ipad = 5c5c5c5c , Opad = 36363636

$||$  means concatenation of strings ( "auto"  $||$  "mat" = "automat" )

**sha-HMAC** – is used as pseudorandom number generator in devices, which produce one-time passwords.  
(More about this in the last chapter)



# Digital signature

- A digital signature enables secure online transactions. Juridically digitally signed document is equally valid as document manually signed at presence of witnesses.

The goal of digital signature is to ensure that


- 1) document/message is not changed
- 2) sender/author is authenticated

Digital signature algorithm usually uses hash function and public key encryption

Typical signature in TLS is **sha256RSA**.

Other signature ECDSA is also possible

# Diagram of digital signature

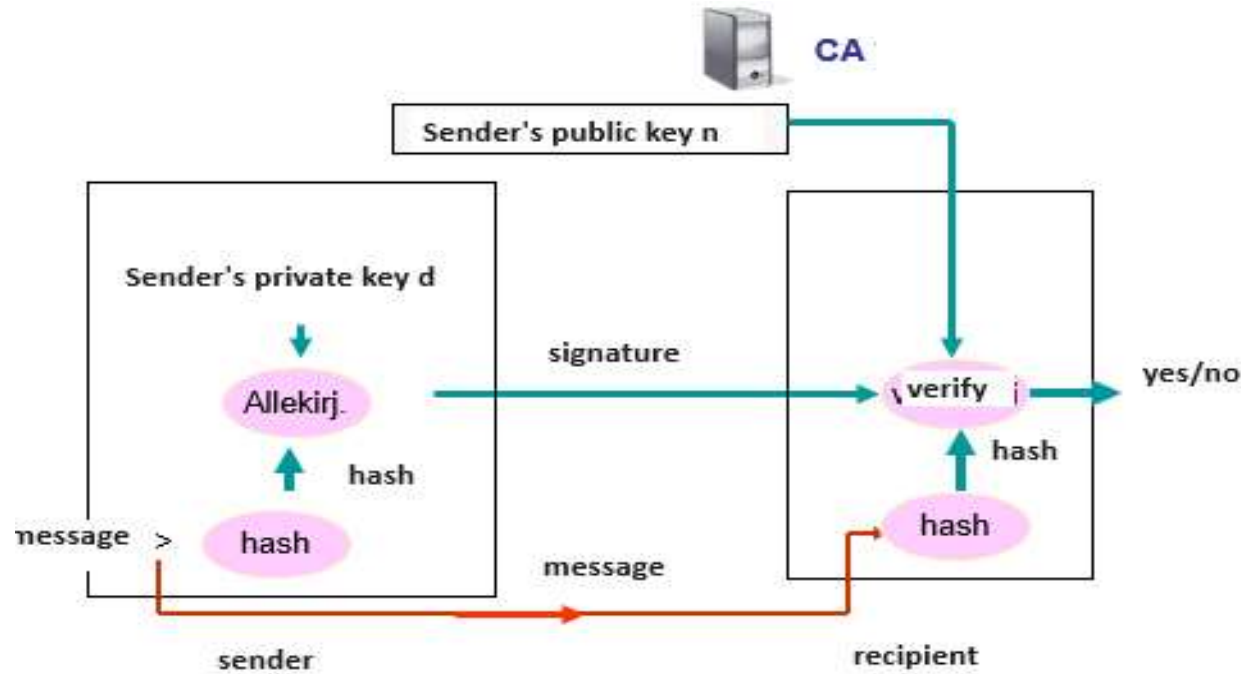

The recipient receives the pair  $(m, S)$ , where  
 $m$  = message  
 $S$  = signature

(In addition to diagram:  
Usually both  $m$   
 $S$  are encrypted with  
recipients public key)

**Digital signature is a number, which is the hash value of message encrypted with senders private key**

**The recipient verifies the signature in the following way:**

- 1) Decrypts the signature with sender's public key. Result is the hash value of message.
- 2) He calculates another hash from the message.
- 3) If both hash values match, message is unchanged and sender authenticated.

# Formula of sha256RSA signature

---

$$S = (\text{sha256}(m))^d \bmod n$$

S = signature

m = message

sha256(m) = hash of the message

d = senders private key


n = senders public key

Example. Message is "**Tämä on koeviesti**". Calculate signature.

Sender's keys :  $n = 308911$  , Private key  $d = 133073$

In the example SHA256 is too long compared to senders RSA keys. We make it easier modifying the hash by taking only 4 numbers from the beginning.

WolframAlpha:

SHA "Tämä on koeviesti"

gives 9126...

Calculate the signature using 9126 as  $h(m)$

$$S = sha(m)^d \bmod n = 9126^{133073} \bmod 308911 = 298954$$

Signature  $S = 298954$

### Example cont...Show how recipient verifies the signature

1. Recipient decrypts the signature using senders public key  $n$  and  $e = 65537$

$$S^e \bmod n = 298954^{65537} \bmod 308911 = 9126$$

2. Recipient calculates SHA of the message directly

SHA( "Tämä on koeviesti") gives 9126...

3. Recipient compares the hash value from signature and hash value calculated the message itself.

**HASH values match => message is unchanged and sender authenticated**