


Multi-Region and Multi-Tenant Deployment

Scope: logical tenant-account placement and production-shaped runtime cells for South Africa, Australia and Botswana. Audience: architecture, platform engineering, security and operations. Tenant is a marketplace security boundary; region is a deployment and residency boundary.

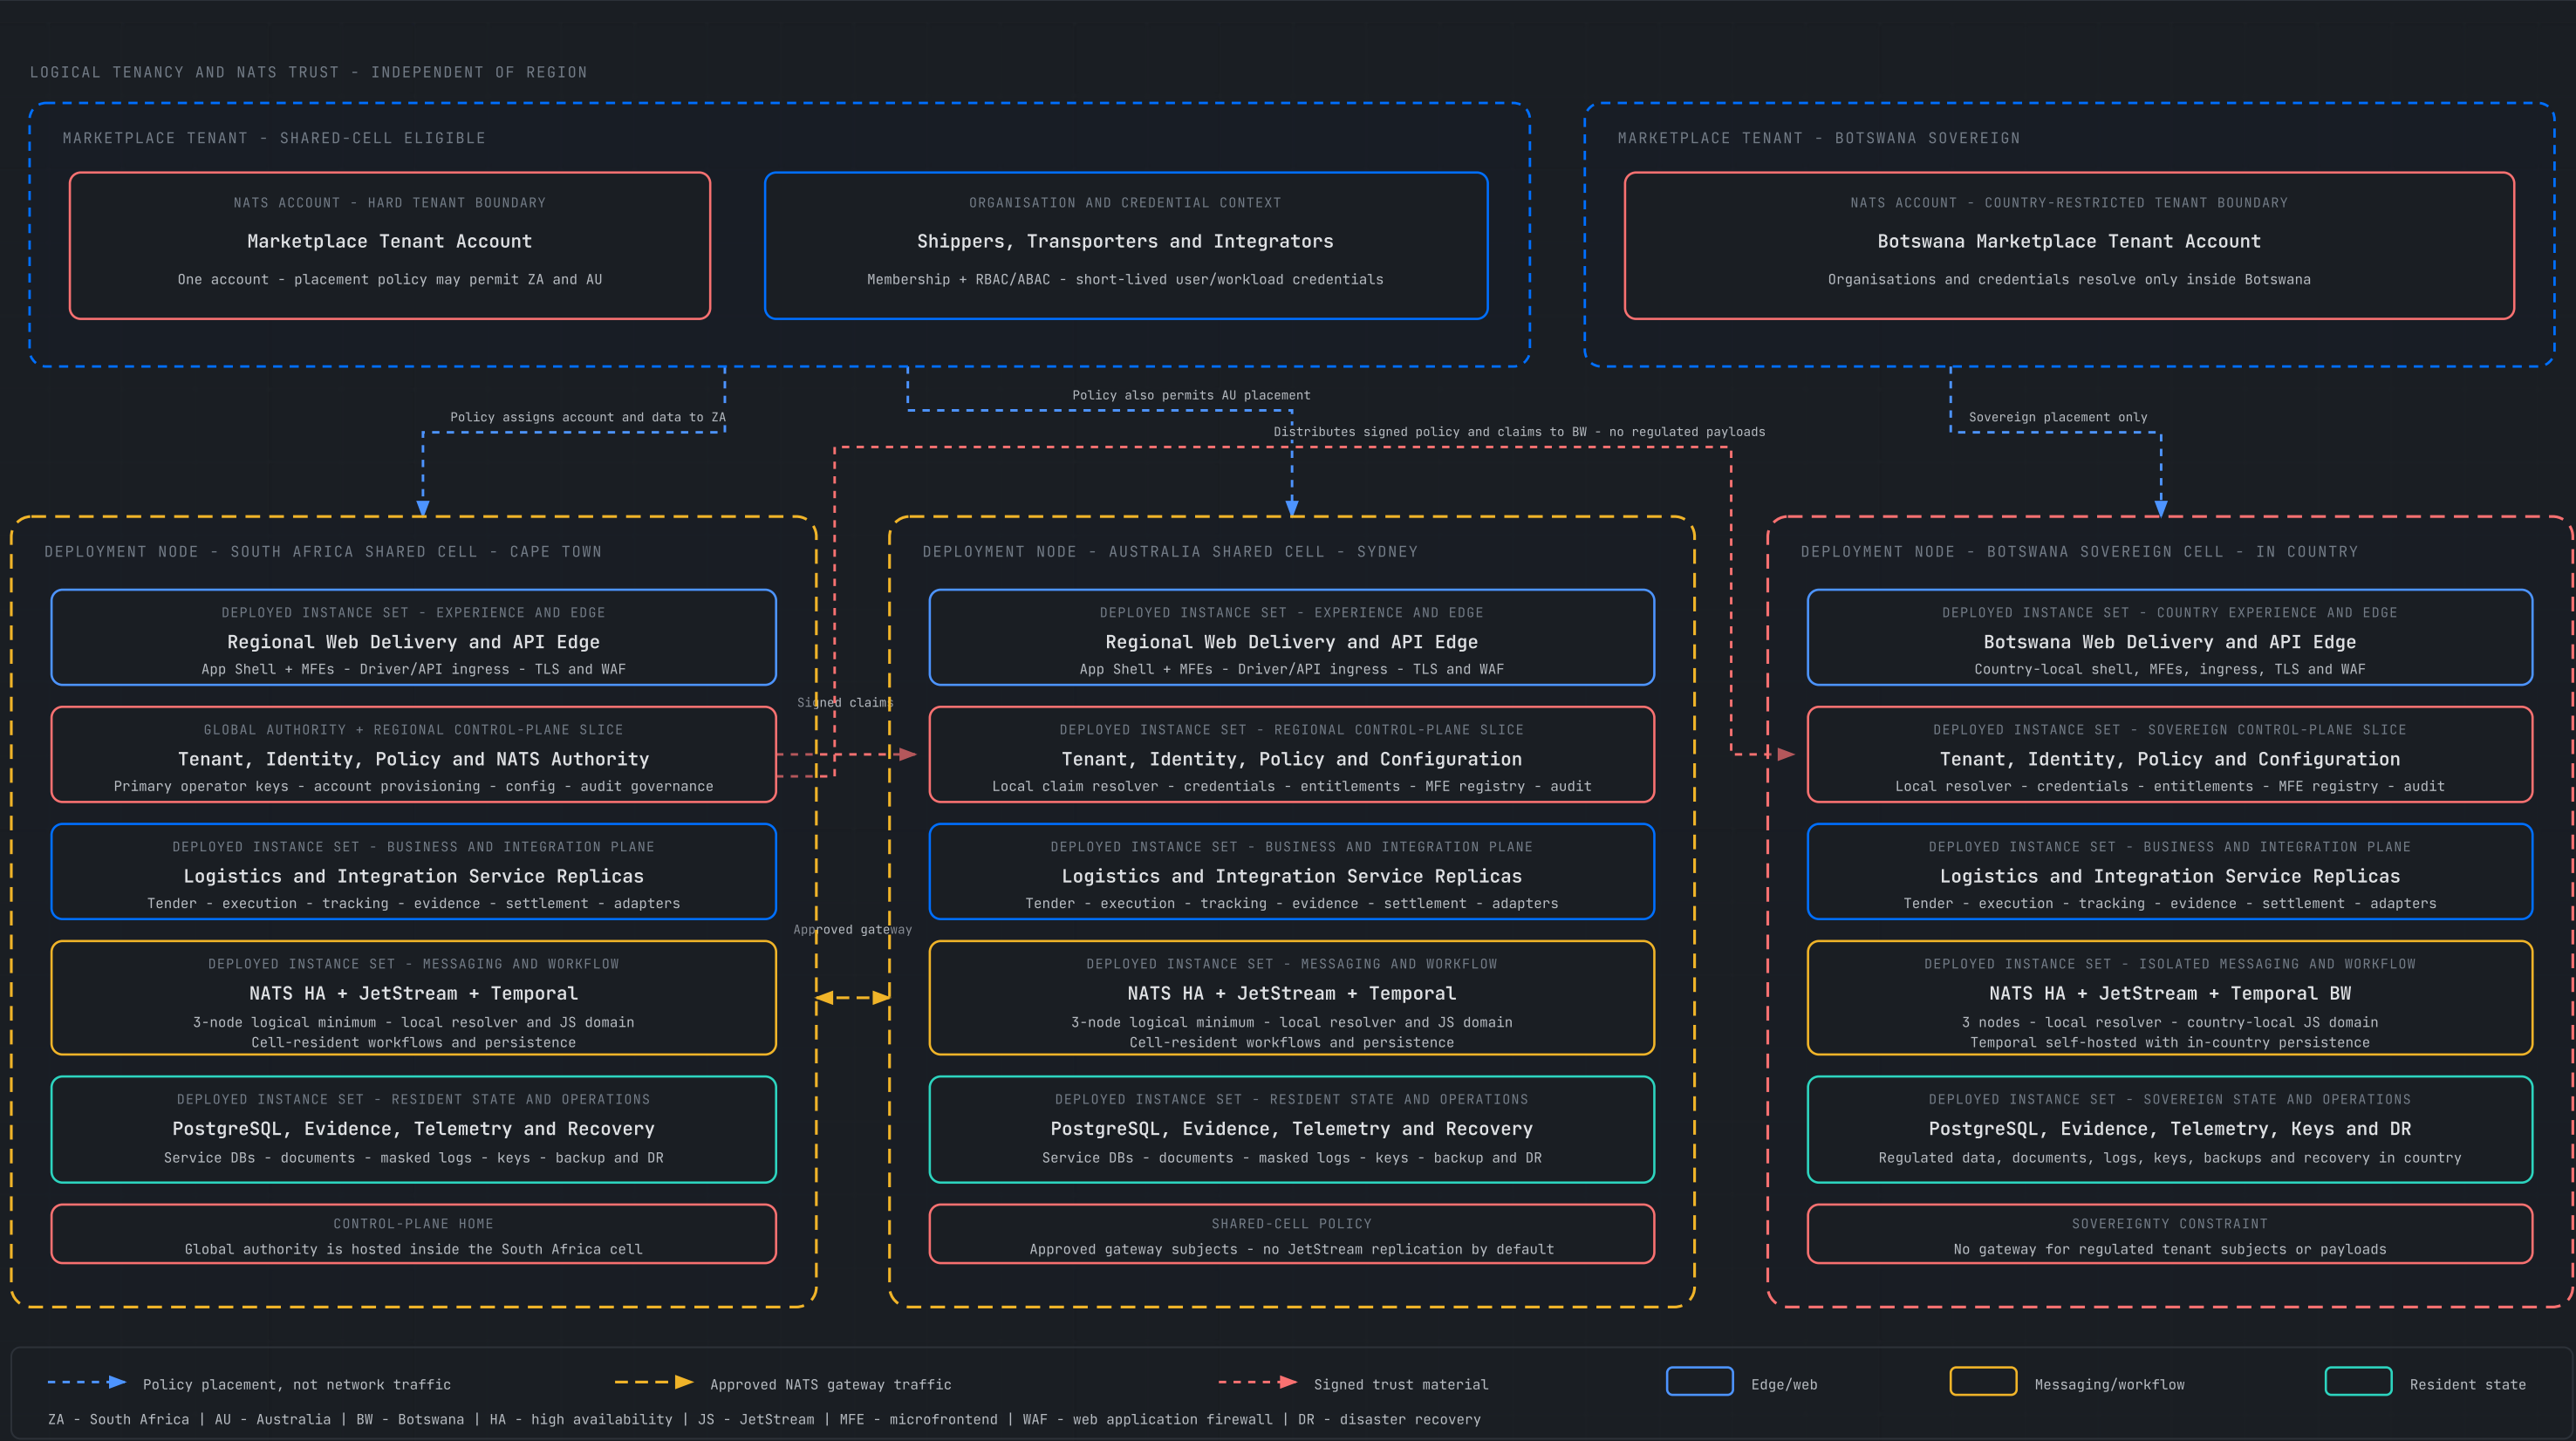

Tenant and region are two independent axes. A tenant account is a server-enforced messaging boundary; placement policy determines which cells may resolve it and hold its data. The topology is production-shaped, but instance sizing, orchestration product, cloud provider and exact gateway subject allowlists remain decisions.

● **Shared-cell topology**

South Africa and Australia run independent clusters and resident stores. Only explicitly approved NATS accounts and subject families may traverse their gateway.

● **Trust authority placement**

The primary NATS operator signing hierarchy is controlled in the South Africa control plane. Other cells use local claim resolvers and short-lived credentials.

● **Botswana sovereignty**

Processing, transit, messages, databases, documents, telemetry, keys, backups and recovery for regulated workloads remain within Botswana.