

Sheaf Mereology

Firstname Lastname ¹, Firstname Lastname ² and Firstname Lastname ^{2,*}

¹ Affiliation 1; e-mail@e-mail.com

² Affiliation 2; e-mail@e-mail.com

* Correspondence: e-mail@e-mail.com; Tel.: (optional; include country code; if there are multiple corresponding authors, add author initials) +xx-xxxx-xxx-xxxx (F.L.)

Abstract

A single paragraph of about 200 words maximum. For research articles, abstracts should give a pertinent overview of the work. We strongly encourage authors to use the following style of structured abstracts, but without headings: (1) Background: place the question addressed in a broad context and highlight the purpose of the study; (2) Methods: describe briefly the main methods or treatments applied; (3) Results: summarize the article's main findings; (4) Conclusions: indicate the main conclusions or interpretations. The abstract should be an objective representation of the article, it must not contain results which are not presented and substantiated in the main text and should not exaggerate the main conclusions.

Keywords: mereology; fusions and integral wholes; sheaves; point-free topology; frames and locales; toposes; modality; merology logic; categorical logic

1. Introduction

Standard presentations of mereology tend to take what we might call a “parts-first” approach. You start by taking the parthood relation as primitive, and then you proceed by stipulating axioms that govern the relation. The goal is to choose your axioms well enough that the resulting models that satisfy your theory align nicely with the actual part-whole complexes that we encounter in the world around us.

By most standard accounts (e.g., [1], [2], or [3]), partisans of the parts-first approach have more or less agreed on a common (minimal) “core” known as “classical mereology.” First, classicists adopt the following principles that govern the ordering of the parts:

- Parthood is reflexive, antisymmetric, and transitive (i.e., it is a partial order).

Second, classicists adopt the following decomposition principle that governs how wholes decompose:

- Wholes decompose into more than one proper part (i.e., parthood obeys some form of so-called “supplementation,” “remainder,” or “complementation” principle which says that no whole consists of only a single proper part — there must be some remainder or relative complement).

Third, classicists adopt the following principle that governs how parts fuse into wholes:

- Any collection of parts whatever forms a fusion (i.e. unrestricted fusion).

Classicists also require (either as an explicit axiom or as a consequence of the other axioms) some version of extensionality:

consult Contoir’s article on this and maybe cite it

Received:

Revised:

Accepted:

Published:

Citation: Lastname, F.; Lastname, F.; Lastname, F. Title. *Philosophies* **2025**, *1*, 0. <https://doi.org/>

Copyright: © 2026 by the authors.

Submitted to *Philosophies* for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

- If wholes have the same parts, then they're the same wholes.

With the above axioms fixed, the classicist can then define a number of other useful notions in the obvious ways, e.g.:

- Overlap and underlap
- Complement/difference
- Etc.

At first sight, most of the classicist's principles can feel deeply intuitive. However, philosophers have objected to virtually all of them. Take for instance that parthood is transitive: if x is a part of y and y is a part of z , then surely x is a part of z . But there appear to be counter-examples. For example, my appendix is a part of me, and I am a member of the orchestra, but my appendix is not a member of the orchestra.

A standard response is to point out that this sort of objection exploits an ambiguity: we utilize different, more specialized notions of "parthood" when we talk about the integration of the parts of biological organisms vs. those of orchestras. My appendix is a part of me under one description (as a part of a biological organism), while I am a part of the orchestra under another (as a member of a musical ensemble).

Defenders of the classical axioms have said that the fact that we can partition the general notion of parthood into more specialized versions only shows that the above axioms do in fact characterize a general notion of parthood, characterized precisely by the above classical notions.

cite Simons, Varzi, etc

However, one can't help but feel that there is something circular about this response, since it turns on the assumption that the different notions of functional unity are species (or determinations, or partitions, or what have you) of a more generic relation. But the existence of that generic relation hasn't been established, and there is no reason to think that mereological pluralism isn't correct — namely, that there are many parthood relations, not one.

cite Fine, etc.

Another common objection to the classical approach revolves around composition principles. In particular, if we adopt unrestricted fusion, as the classical mereologist does, then we seem to get too many fusions. For instance, take the pencil on the table in front of me and your left knee. Are we really to believe that there is a fusion of that pencil and your left knee? Such a fusion would have two parts that live quite far apart (possibly even on different sides of the globe).

Defenders of the classical approach do have a response though: just because we may not have a word or concept that names the pencil+knee fusion, that doesn't mean it doesn't exist.

cite Varzi, etc.

Indeed, just as Moore attempt to show that extramental things exist by holding up his two hands and saying, "Here is one hand, here is the other," so too might one try to show that the pencil+knee fusion exists by saying, "there is the pencil, there is the knee."

Again though, one can't help but feel that there is something circular about this response. To appeal to the pencil+knee's fusion after its fused-ness has been questioned just brings the principle under scrutiny back into the mix. A better response would provide an independent reason to think that pencil+knee qualifies as more than a "mere Cambridge" fusion.

Whether these objections/responses constitute any real conceptual clarification or are inexorably stuck in semantic circularities is not something we want to decide here. We mention these points only because they illustrate something else: they illustrate that we

seem to have intuitions not just about parts, but also about fusions. In the two objections just mentioned, we seem to have certain conceptions of integrated fusions somewhere in the back of our minds, and those seem to be driving the objections.

For example, the reason it seems wrong to say my appendix is not part of the orchestra is because we seem to think that biological organisms are integrated in a different way than orchestras. Similarly, the reason we can so easily think that a pencil and a hand don't fuse is because they don't integrate in one of the ways that we ambiently accept as legitimate.

That leads to the following question: if we have ambient intuitions about which collections count as fusions and which ones don't, then why not take a "fusions-first" approach to mereology? Instead of taking parthood as the primitive relation, and then try to work up to a notion of fusions, why not take fusions as the primitive relation, and then work backwards to parts?

Such an approach is far less common in the technical mereological literature. That raises yet another question: why has the "fusions-first" approach been so neglected? One proposal is that it might seem to be too unwieldy. One might say that there are just too many different ways that things can integrate into wholes/fusions, and so it is a hopeless task to try and enumerate them and offer any sort of a unifying taxonomy.

cite Simons

Another reason might be that such a view would be inelegant and perhaps would even fail to qualify as an "explanation" of the part-whole phenomenon altogether. If you ask me to explain why various *Xs* seem to exhibit the same (or sufficiently similar) properties, it would be quite dissatisfying if I said, "that's easy, there is no unifying explanation."

remove/rewrite these last two paragraphs.

The "fusions-first" approach is not so uncommon in the literature as I just made it out to be. Mereotopology exists as a branch of mereology, for all intensive purposes, precisely because it is the fusions-first response to the classical parts-first approach. Cite Casati and Varzi, chapter 3 and others.

Fortunately, a "fusions-first" approach need not be as doomed as it may seem. In this paper, we claim that there is a satisfying "fusions-first" approach to mereology, and we present it in what follows. To accomplish this, we will build a bridge between category theory and philosophy. In particular, we will take well-known techniques used to manage the gluing-together of parts in algebraic geometry and topos theory, and we will apply those techniques to the realm of mereology.

1.1. From Parts to Sheaves

To begin, we want to suggest that it is useful to draw a distinction between what one might call the algebra of parts on the one hand, and the integrity or gluing-together of the parts on the other. To get a sense of what this distinction means, and why it is useful, fix a part-whole complex to analyze (a statue of Dion, let's say), and let an enumeration of its parts be given. The classical principle of unrestricted fusion says that any combination of those parts glues into a fusion. In essence, this generates all possible combinations of parts. As such, it nearly yields a complete lattice, with overlap and underlap serving as the meet and join operators.

However, it only *nearly* yields a lattice because mereologists have been reluctant to allow a bottom element. Since mereologists are ontologists, they find a null element to be ontologically suspect. And indeed, what could an empty thing that is part of all other things possibly *be*? So, instead of admitting it into their mereological systems, classical

mereologists have simply omitted it altogether. David Lewis ([4]) even went so far as to formulate a version of set theory that had no empty set.

Yet despite their suspicion of a null element, classical mereologists have not shied away from allowing all possible fusions to exist, as noted already. Since the bottom element of a lattice is the empty join, we can put the point like this: classical mereologists are ontologically conservative about empty joins, and ontologically permissive about non-empty joins. As Tarski pointed out long ago, the principles of classical mereology thus yield a boolean algebra, with the bottom element removed

cite

But it is difficult to see the motivation here. On the one hand, if you want to be ontologically conservative, then why allow so many fusions? If we are going to be suspicious of an empty join, then wouldn't we also be suspicious of the fusion of (say) Dion's left hand and right knee? Conversely, if we are happy to admit the existence of entities like the fusion of Dion's left hand and right knee, then why not an empty join?

One way to diagnose the problem is to say that we, as classical mereologists, have confused the algebra of parts with the integrity of the wholes. We have defined the algebra of parts in a combinatorial way, but then at the same time, we tried to make that algebra do ontological work. But this inevitably pulls us in two directions. So, we end up letting the algebraic aspects of our parthood relation do ontological work (creating any fusion whatever), until it goes too far (e.g. the null element), at which point we try to pull back on the ontological reigns.

For another point of tension, consider extensionality. The classicist's axiom says if x and y have the same parts, then $x = y$. This is ontologically conservative: "no difference without a difference maker"

cite Lewis

However, this flattens all structure, and so it judges that "tip" and "pit" cannot be different words, since they have the same parts, after flattening. But that of course feels wrong. These two words have a different ordering of letters, so why would we neglect that in determining their identity? Here too we don't want the combinatorics to do any ontological work, even though we're happy to let the join operation freely generate entities.

We can free ourselves from these sorts of tensions if we separate the algebra of parts from the integrity or gluing of the parts. Let us think of the lattice of parts merely as the abstract "parts space," i.e., as the set of all *possible* combinations of the given parts into larger pieces. Moreover, let us be clear that this does not do any ontological work. A "parts space" is just an abstract description of the various combinations of parts that could be. Think of it as a kind of mold that has slots that could be filled in with actual pieces. To specify an *actual* part-whole complex that occupies that parts space, we need to take a second step and fill in certain of those slots with actual stuff, and specify which of those pieces glue together into bigger pieces.

Once we have made this distinction, we can let the algebra of parts be an algebra, and we can even allow a bottom element without worry. As a component of the abstract parts space, the bottom element is no more a real thing than the join of any other arbitrary regions of the parts space. At the same time, when we specify which pieces really occupy the parts space, we can be as ontologically conservative or as permissive as we like. We have the freedom to provide gluing conditions that are as fine-grained as we need. For instance, we can say that certain pieces glue together, while others do not (e.g., Dion's right knee glues directly to his right femur, but not directly to his left hand). Moreover, we can let the identity conditions be determined by the gluing conditions, and so maintain structured extensionality (a difference in fusions comes from different parts, or different gluings).

Once we make the distinction between the background algebra of parts and the foreground integrity of the fusion, our task takes on a distinctive shape: now we find ourselves trying to coherently glue pieces together over an ambient space. And that is something known well to algebraic geometers and topos theorists: it is the task of constructing a sheaf over a space. For the algebraic geometer and topos theorist, sheaf theory provides a systematic framework for gluing together pieces over a space in such a way that the gluing is done coherently and consistently against the ambient structure of the underlying space. It stands to reason, then, that the mathematician's sheaf-theoretic techniques can be used profitably in mereology.

1.2. The Central Thesis

In this paper, we want to build a bridge between sheaf theory and mereology by importing some of those sheaf-theoretic techniques into the mereological setting. The central claim of this paper is thus: part-whole complexes can be usefully modeled as sheaves over locales. The key ideas are as follows:

- An algebra of parts tells us all the ways that parts can combine to form bigger wholes. In this sense, an algebra of parts generates the ambient “parts space” of an object, i.e. the abstract lattice-theoretic structure of *possible* combinations. But not all possible combinations actually glue together to form *actual* fusions. In many cases, we want to allow that only some of the parts glue together into an integrated whole/fusion.
- So, we then require a separate step where we, the mereologists, have to “fill in” the abstract parts space with actual parts: we have to specify which bits of stuff fill in or occupy which slots in that ambient parts space, and we have to specify how those various bits of stuff glue together to form integrated fusions.
- It is tempting to try to model the ambient parts space as a topology. However, topologies have points, and it is not clear that all of the part-whole complexes that we might wish to consider are usefully modeled with points. This limitation is easy to overcome if we generalize and move to the point-free setting: instead of a topology, we choose to model the ambient parts space as a locale (a point-free generalization of a topology).
- We use a sheaf to specify which bits of stuff inhabit an ambient locale and also to stipulate how those bits glue together. A sheaf is precisely an assignment of data to a topology or locale that coherently glues that data together. So, we choose to model the actual part-whole complex as a sheaf over the ambient locale.
- To specify a part-whole complex, then, we (the mereologists) simply need to define a sheaf over the given locale. The “data” that we assign to the ambient locale are the bits of actual stuff that inhabit that parts space, and the gluing condition specifies how those pieces glue together.
- This yields a straightforward procedure that can be used to model any part-whole complex: first, specify the ambient locale, i.e., the abstract space of parts that the part-whole complex in question inhabits; second, fill in that ambient space with actual pieces and say how they glue together; third, let the sheaf framework do the rest of the work. Then the glued sections of the sheaf turn out to be the fusions, whose parts are the smaller sections each fusion is glued from. This is an honest “fusions-first” approach.

There are two important benefits that come along for free when we take this approach.

- The sheaves over a locale form a topos. A topos is a special kind of category that you can do “parts”-like logic in. Indeed, every topos comes equipped with just such an internal logic. It turns out that this internal logic corresponds exactly to the correct mereological logic that governs the part-whole complexes that can be formed over

that locale. So, there is no need to manually create a mereological logic to reason about the part-whole complexes that occupy the ambient locale. We get that for free.

- Modalities are natural operators that occur in sheaves, where they are easily defined and managed. These modalities interact correctly with the internal logic of the topos (and in fact are part of that internal logic). So we get mereological modalities for free too.

To our mind, the fact that these benefits come for free offers a compelling reason to adopt a sheaf-theoretic approach to part-whole complexes.

1.3. Literature

The literature on mereology is vast. What we might think of as formal mereology (axiomatized systems) goes back at least to Leśniewski's system called "Mereology" [cite] and Leonard and Goodman's "Calculus of Individuals" ([5] and [6]), along with other contributions by Whitehead [cite], Tarski ([7] and [8]), Rescher ([9]), and others. Surveys of the resulting literature and ideas can be found in the now standard works by Simons and others (e.g. [10], [1], [2], or [3]).

Topological concepts have been used in mereology for a long time (see the historical coverage and discussion in [1]). So-called "mereotopology" explicitly aims to characterize mereological questions in topological ways, especially using notions like boundaries, interiors, and connectedness. A standard introduction to modern mereotopology is [11].

However, despite its heavy reliance on topology, mereotopology has not (to our knowledge) utilized sheaf-theory in any significant way (nor has classical mereology).

discuss Spivak's behavioral mereology/temporal type theory

([12], [13]), Moltmann's trope sheaves, Moltmann's mereology.

For sheaves, see [14], [15], [16], or [17]. For locales, see [18], [19], [20], [21].

For toposes, see [22], [23], [24], [15], [25].

discuss the idea of "deriving" the logic from the underlying structure, rather than "inventing" it axiomatically. Perhaps Moltmann's mereology is to be cited here.

discuss how mereological concepts are used in certain "fusion-first" approaches, e.g., Peter Simons and using "connectedness." Discuss Van Inwagen's special composition question ([26]).

discuss non-boolean approaches. Discuss boolean algebra stuff from Protow, the survey "Logic in Heyting Algebras," Moltmann's Heyting mereology.

1.4. Contributions

The contributions of this paper are as follows:

- We demonstrate a viable "fusions-first" approach to mereology.
- We separate the algebra of parts from the integrity of fusions.
- We build a bridge between mereological techniques of mathematics and philosophy. In particular:
 - We utilize sheaves to systematically manage coherence and gluing over parts spaces.
 - We acquire the correct mereological logics for free from the internal language of the underlying topos.

1.5. Plan of the Paper

The plan of this paper is as follows.


- In Section 2, we introduce the relevant parts of sheaf theory that will be used in the rest of the paper.
- In Section 3, we define part and whole in sheaf-theoretic terms, and we show how to model different kinds of part-whole complexes as sheaves.
- In Section 4, we show how mereological modalities arise naturally in sheaves.
- In Section 6, we discuss what classical mereological notions look like in the sheaf-theoretic setting.

2. Sheaf-Theory


In this section, we cover the parts of sheaf theory that we will utilize in the rest of the paper. Readers familiar with sheaf theory can skip this section.

2.1. Fibers


Suppose we have a map (function) $f : E \rightarrow B$ that looks something like this:

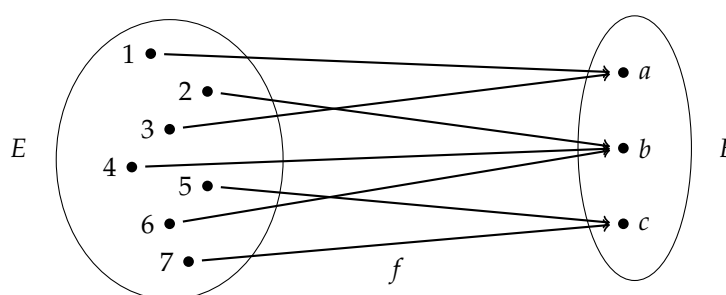


It is sometimes convenient to turn the diagram sideways and group together points in the domain that get sent to the same target, like so:

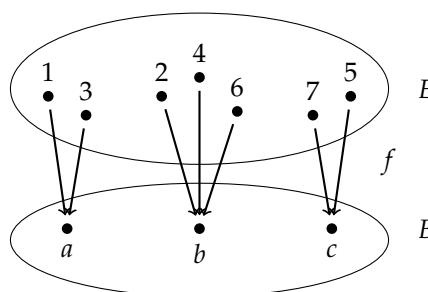

That makes the pre-images very easy to see. For any point in B , its pre-image is just the group of points sitting “over” it:

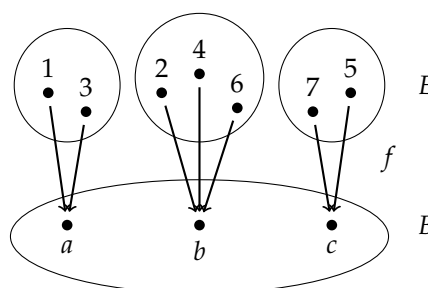


If we stack the points in each pre-image vertically, one on top of the other, we can then think of each pre-image as a kind of “stalk” growing over its base point:

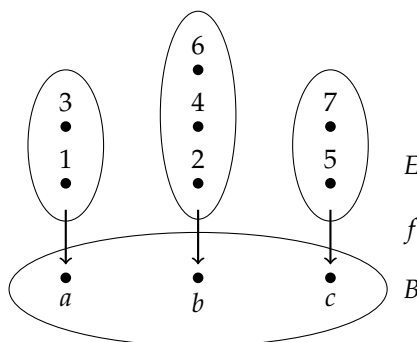


This gives rise to the idea of the “fibers” of a map. The fibers of a map are just its pre-images. For instance, the fiber over b is $\{2, 4, 6\}$.

Definition 1 (Fibers). Given a map $f : E \rightarrow B$ and a point $y \in B$, the fiber over y is its pre-image $f^{-1}(y) = \{x \mid f(x) = y\}$. B is called the “base space” (or “base” for short) of f , while the point y is called the “base point” (or “base” for short) of the fiber.

We can select a cross-section of one or more fibers by selecting a point from each of the fibers in question. For instance, we can take 3, 4, and 7 as a cross-section of the fibers $f^{-1}(a)$, $f^{-1}(b)$, and $f^{-1}(c)$:

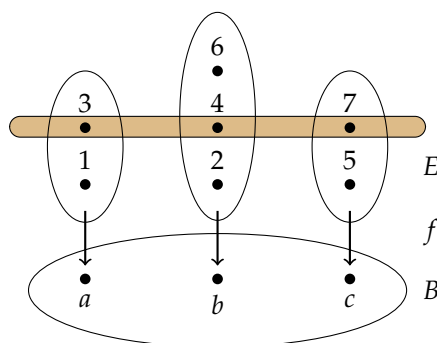

We can also take cross-sections local to only some of the fibers. For instance, we can take 1 as a cross-section just of $f^{-1}(a)$:

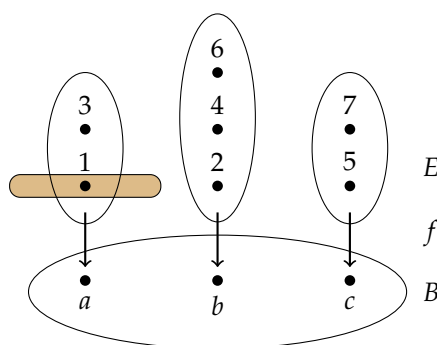

Definition 2 (Sections). Given a map $f : E \rightarrow B$ and a subset $C \subseteq B$ (i.e., a selection of base points in B), a section of f (over C) is a choice of one element from each fiber over each base $x \in C$.

Remark 1. Since each point in a fiber amounts to a section over the fiber’s base, the elements of a fiber are often just called the “sections” of the fiber.

2.2. Spaces

In the above examples, the base B was a set. We often want to consider bases that have more structure, e.g., bases that have spatial structure.

In traditional topology, spaces are built out of the points of the space. Given a set of points, a topology on that set specifies which points belong in which regions of the space.

Definition 3 (Topology). Let X be a non-empty set, thought of as the “points” of the space. A topology on X is a collection T of subsets of X , thought of as the “regions” of the space (called the “open sets” or just the “opens” of T), that satisfy the following conditions:

(T1) The empty set and the whole set are open:

$$\emptyset \in T, X \in T.$$

(T2) Arbitrary unions of opens are open:

$$\text{if } \{U_i\}_{i \in I} \subseteq T, \text{ then } \bigcup_{i \in I} U_i \in T.$$


(T3) Finite intersections of opens are open:

$$\text{if } U_1, \dots, U_n \in T, \text{ then } \bigcap_{i=1}^n U_i \in T.$$

These conditions encode the way that spatial regions are put together. For instance, it ensures that if two regions overlap, then their overlapping area is a region too (and indeed, that’s what it means for regions to *overlap*: there’s a region of space they have in common).


Remark 2. The regions of a topology, ordered by inclusion, form a complete lattice. Since the topology includes arbitrary unions, the join of this lattice is set union, but since the topology includes only finite intersections, the meet of this lattice is the interior of set intersection.

Example 1. Let $X = \{a, b, c\}$. One possible topology is: $T = \{\emptyset, \{b\}, \{a, b\}, \{b, c\}, \{a, b, c\}\}$. If we draw dashed circles around each of the opens (regions), ignoring the empty set, we get:

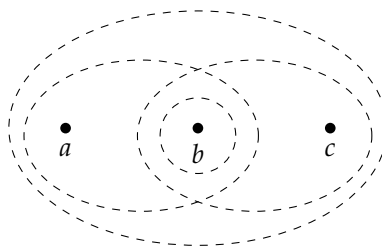

There are two regions $\{a, b\}$ and $\{b, c\}$ that overlap at b (so $\{b\}$ is a region in T too). There is also the full region $\{a, b, c\}$, which is the union of the smaller regions.

We can draw T as a Hasse diagram, which shows that the regions form a lattice:



The lattice structure suggests that much of what is important about a space is not so much its points, but rather its opens/regions. This leads to the idea that topology-like

reasoning can be done without the points. So, we can generalize: take a topology, and drop the points. That leaves just the opens/regions, which we call a frame (or locale).

Definition 4 (Frames/locales). *A frame (synonymously, a locale) \mathbb{L} is a partially ordered set L (we call its elements “opens” or “regions”) that satisfies the following conditions:*

(L1) *L is a complete lattice:*

- Every subset $S \subseteq L$ has a join, denoted $\bigvee S$.
- Every finite subset $F \subseteq L$ has a meet, denoted $\bigwedge F$.

(L2) *Finite meets distribute over arbitrary joins:*

$$a \wedge \bigvee_{i \in I} b_i = \bigvee_{i \in I} (a \wedge b_i), \text{ for all } a \in L \text{ and all families } \{b_i\}_{i \in I} \subseteq L.$$

Define $V \preceq U$ (read “ V is included in U ”) by $a = a \wedge b$.

Remark 3. *The fact that $V \preceq U$ is equivalent to $a = a \wedge b$ means we can deal with the opens of a frame algebraically (via \wedge and \bigvee operations), or order-theoretically (via the \preceq relation), whichever is more convenient.*

Remark 4. *The category of locales is defined as the dual/opposite of the category of frames (see ?? below), and so frames and locales are quite literally the very same objects. In practice, frames are often used for algebraic purposes, and locales are used for (generalized) spatial purposes. Here, we will have no reason to distinguish these two roles, and so we will use the names “frame” and “locale” interchangeably.*

2.3. Presentations of locales

Locales have presentations much like groups and other algebraic structures. To give the presentation of a locale, specify a set of generators and relations.

Definition 5 (Presentations). *A presentation $\langle G, R \rangle$ of a locale \mathbb{L} is comprised of:*

(P1) *A set of generators $G = \{U_k, U_m, \dots\}$.*

(P2) *A set of relations $R \subseteq G \times G$ on those generators.*

The locale \mathbb{L} presented by $\langle G, R \rangle$ is the smallest one freely generated from G which satisfies R .

Remark 5. *Every locale has a presentation, and a locale can have multiple presentations.*

To calculate the locale that corresponds to a presentation, start with the generators, then take all finite meets and all arbitrary joins that satisfy R (and of course L1 and L2).


Example 2. *Let a locale \mathbb{L} be given by the presentation $\langle G, R \rangle$ where:*

- $G = \{\perp, U_1, U_2, U_3\}$.
- $R = \{\perp \preceq U_1, U_1 \preceq U_2, U_1 \preceq U_3\}$.


There are four generators (\perp , U_1 , U_2 , and U_3), and \perp is below U_1 while U_1 is a sub-region of U_2 and U_3 . Since U_1 is a sub-region of both U_2 and U_3 , U_1 is their meet:

- $U_1 = U_2 \wedge U_3$.

At this point, we have generated this much of the locale:



R says nothing to constrain joins, so we need to join everything we can. In this case, we need to join U_2 and U_3 :



There are no further joins or meets that aren't already represented in the picture. For instance, all further non-trivial meets are already accounted for:

- $U_1 \wedge \perp = \perp$.
- $U_2 \wedge U_1 = U_1$ and $U_3 \wedge U_1 = U_1$.
- $U_2 \wedge \perp = \perp$ and $U_3 \wedge \perp = \perp$.
- $(U_2 \vee U_3) \wedge U_2 = U_2$ and $(U_2 \vee U_3) \wedge U_3 = U_3$.
- $(U_2 \vee U_3) \wedge U_1 = U_1$.
- $(U_2 \vee U_3) \wedge \perp = \perp$.


Similarly, all other non-trivial joins are also already accounted for:

- $\perp \vee U_1 = U_1$.
- $\perp \vee U_2 = U_2$ and $\perp \vee U_3 = U_3$.
- $\perp \vee (U_2 \vee U_3) = U_2 \vee U_3$.
- $U_1 \vee U_2 = U_2$ and $U_1 \vee U_3 = U_3$.
- $U_2 \vee (U_2 \vee U_3) = U_2 \vee U_3$ and $U_2 \vee (U_3 \vee U_3) = U_2 \vee U_3$.

Example 3. Let $\mathbb{L} = \langle G, R \rangle$ be given by:

- $G = \{U_1, U_2, U_3\}$.
- $R = \emptyset$.

We have three generators (U_1 , U_2 , and U_3), and there are no relations restricting how those generators are related. Thus, the locale that is freely generated from this presentation is isomorphic to the power set of three elements:

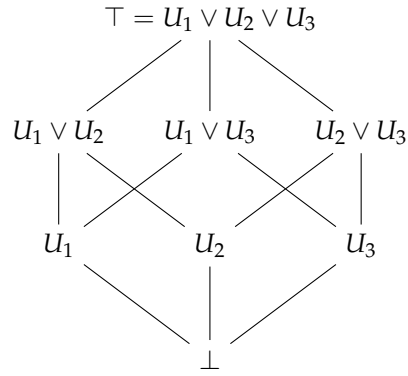

A presentation provides the most “minimal” information from which the rest of the locale is generated. It might be tempting to think that each generator is an atomic region, but that is not quite right. Some generators are reducible to others.

Definition 6 (Meet-irreducibility). *Given a presentation $\mathbb{L} = \langle G, R \rangle$, a region $U \in G$ is meet-reducible (“reducible” for short) if it is the non-trivial meet of other regions:*

$$\exists W, V \in \mathbb{L}, U \neq W, U \neq V, \text{ and } U = W \wedge V.$$

U is meet-irreducible (“irreducible” for short) if it is not meet-reducible, i.e.:

$$\forall W, V \in \mathbb{L}, U = W \wedge V \implies (V = U \text{ or } W = U).$$

Intuitively, a generator is reducible if it can be expressed as the meet of strictly larger regions, which occurs exactly when it is their overlap.

Example 4. *Take the locale from Example 2. U_1 is the overlap of U_2 and U_3 , and U_2 and U_3 are strictly larger regions than U_1 , so U_1 is reducible.*

By contrast, U_2 and U_3 are irreducible, because they cannot be expressed as the meet of two strictly larger regions. Similarly, \perp is irreducible, because it is not the meet of two strictly larger regions either (it is the meet of only one strictly larger region, namely U_1).

We can see the minimal irreducible generators of a locale as its atomic regions.

Definition 7 (Atomic regions). *Given a presentation $\mathbb{L} = \langle G, R \rangle$, define the atomic regions of \mathbb{L} , denoted $\text{Atoms}(\mathbb{L})$, as the minimal irreducible generators, i.e. those generators $g \in G$ that satisfy the following two conditions:*

(A1) Meet-irreducibility. *g is meet-irreducible.*

(A2) Minimality. *There is no strictly smaller meet-irreducible h with $h \preceq g$.*

use “primitive” or “fundamental” instead of “atomic”? An atomic thing can’t be broken down, but a meet-irreducible element does have a part!

2.4. Presheaves

Above we considered the fibers of a map $f : E \rightarrow B$, where E and B were sets. We can also consider fibers over locales, where the fibers respect the locale’s structure. This is called a presheaf. A presheaf is an assignment of data to each of a locale’s regions that is “stable under restriction,” i.e., that respects zooming in and out.

Definition 8 (Presheaf). Let \mathbb{L} be a locale, and let $\text{Arr}(\mathbb{L})$ be $\{\langle A, B \rangle \mid A \preceq B \in \mathbb{L}\}$. A presheaf on \mathbb{L} is a pair $\langle F, \{\rho_A^B\}_{\langle A, B \rangle \in \text{Arr}(\mathbb{L})} \rangle$, where:

- F assigns to each region $U \in L$ some data $F(U)$.
- $\{\rho_A^B\}_{\langle A, B \rangle \in \text{Arr}(\mathbb{L})}$ is a family of maps $\rho_A^B : F(B) \rightarrow F(A)$ (called “restriction maps”), each of which specifies how to restrict the data over $F(B)$ down to the data over $F(A)$.

All together, $\langle F, \{\rho_A^B\}_{\langle A, B \rangle \in \text{Arr}(\mathbb{L})} \rangle$ must satisfy the following conditions:

(R1) Restrictions preserve identity:


$$\rho_U^U = \text{id}_U \text{ (the identity on } U\text{), for every } U \in \mathbb{L}.$$

(R2) Restrictions compose:

$$\text{If } A \preceq B \text{ and } B \preceq C, \text{ then } \rho_A^C = \rho_A^B \circ \rho_B^C.$$

Since F assigns data $F(U)$ to each region $U \in \mathbb{L}$, we can think of the $F(U)$ s as the “fibers” over \mathbb{L} , and the restriction maps as “zoom in” maps that go from bigger fibers down to smaller fibers.


Example 5. Let \mathbb{L} be a locale $\{\perp, W, V, U\}$ with the following structure:




Next, let's define a presheaf F as follows:

- $F(U) = \{a, b, c, d\}$, $F(V) = \{a, b\}$, $F(W) = \{c, d\}$, $F(\perp) = \{*\}$.
- Define ρ_V^U as the projection (send a to a , b to b , and the rest can go anywhere), and similarly for ρ_W^U . Let ρ_\perp^U , ρ_\perp^V , and ρ_\perp^W send their data to $\{*\}$, and let the rest be identities.

We can see F 's assignments as fibers over \mathbb{L} by drawing them over the regions they are assigned to. For instance, over U we have $F(U)$, i.e., $\{a, b, c, d\}$:

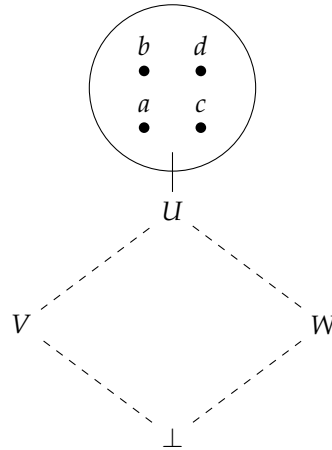


Similarly, over V and W , we have $F(V) = \{a, b\}$ and $F(W) = \{c, d\}$:

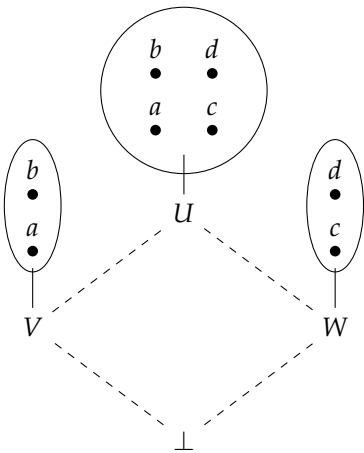

434

Finally, over \perp , we have a singleton set:

435

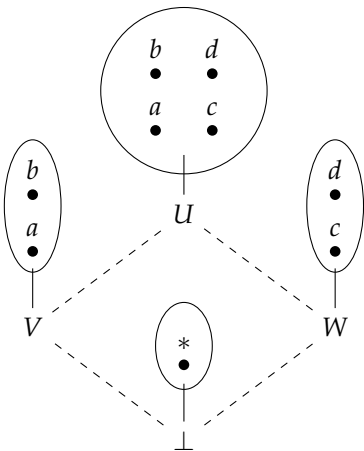


436

The restriction maps show how to “zoom in” on the parts (sub-fibers) of any given fiber. For instance, we can see that the fiber over V is contained in the fiber over U . The restriction map just projects that sub-fiber out, thereby showing us how to “zoom in” on that sub-fiber:

437

438


439

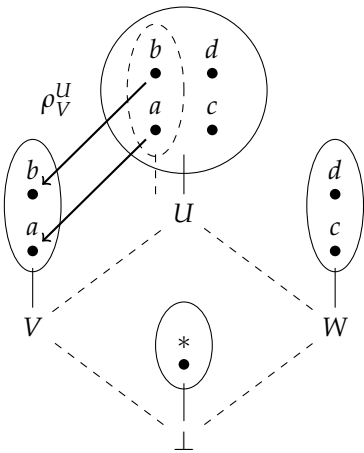

440

It’s similar for the fiber over W :


441

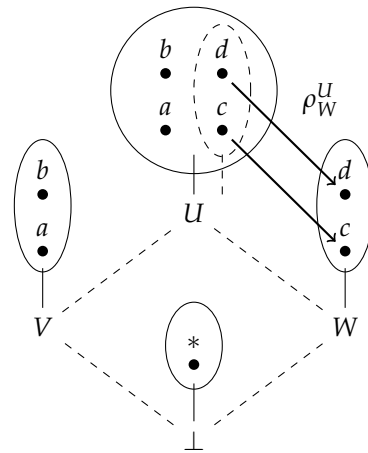

442

Restricting a fiber to itself is just the identity on the fiber:


443

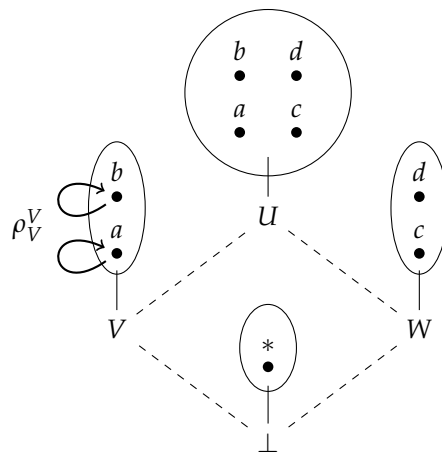

444

The other restriction maps restrict down to the singleton set. For instance:

445

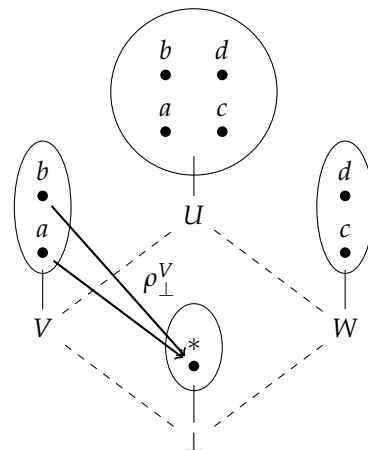


446

All of this makes it clear that the structure of the presheaf data that sits in the fibers over \mathbb{L} mimics (respects) the structure of the base locale:

447

448

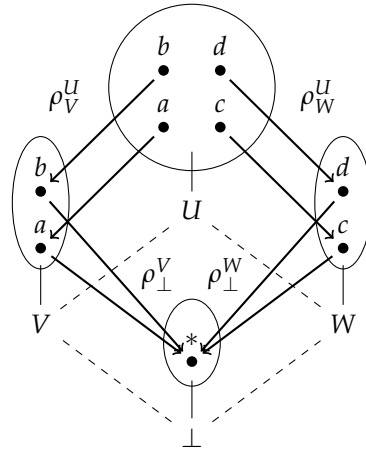

Remark 6. In line with Remark 1, the elements of each fiber $F(U)$ are usually just called the “sections” of $F(U)$. For instance, c is a section of $F(W)$, as is d .

2.5. Sheaves

The definition of a presheaf requires only that the data be stable under restriction (zooming in on a region). It does not require that the data fit together across different regions (fibers).

A sheaf is a presheaf with an added gluing condition: whenever you have compatible data on overlapping fibers, there must be a unique way to glue it together into data over the union. In other words, the data in the fibers must agree on overlap and combine coherently.

To get at this idea, let’s first define a cover. A cover of a region U is a selection of sub-regions that covers U in its entirety. The chosen sub-regions don’t leave any part of U exposed.

Definition 9 (Cover). Let \mathbb{L} be a topology or a locale, and let U be a region of \mathbb{L} . A cover of U is a family $\{U_i\}_{i \in I} \subseteq \mathbb{L}$ such that:


$$U = \bigvee_{i \in I} \{U_i\}.$$

In other words, a cover of U is a family of regions that join together to form U .


Example 6. Take the topology from Example 1: $T = \{\emptyset, \{b\}, \{a, b\}, \{b, c\}, \{a, b, c\}\}$. A cover of $\{a, b, c\}$ is $\{a, b\}$ and $\{b, c\}$, because altogether, $\{a, b\}$ and $\{b, c\}$ cover all of the points in $\{a, b, c\}$.

Another cover of $\{a, b, c\}$ is $\{\{a, b\}, \{b, c\}, \{b\}\}$. Although $\{b\}$ is redundant here, this choice of sub-regions still entirely covers $\{a, b, c\}$ as required.


Example 7. In the context of frames, where there are no points, a cover of U is just a selection of sub-regions of U that together join together to form U . Take the locale from Example 5:



A cover of U is $\{V, W\}$, since $U = \bigvee \{V, W\}$:

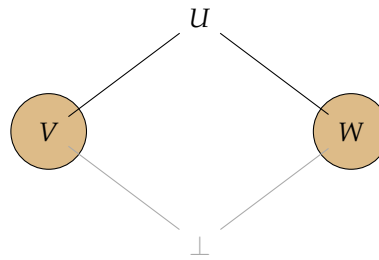

A cover of V is just $\{V\}$:

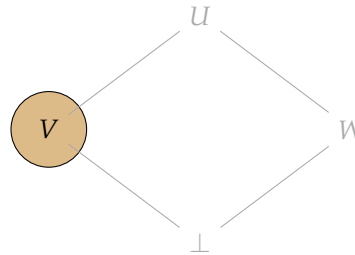


Remark 7. A cover over the least element of a locale (or a topology) is empty (the empty set), because there are no regions (or points) to cover.

Given a presheaf F over a locale \mathbb{L} , if we have a cover $\{U_i\}_{i \in I}$ of some portion of \mathbb{L} , there is a corresponding family of fibers $\{F(U_i)\}_{i \in I}$ over that cover. We can pick one section (i.e., one element) from each such fiber to get a slice of elements that spans all of the fibers over that cover. Let us call such a choice a selection of patch candidates.


Definition 10 (Patch candidates). Given a presheaf F and a cover $\{U_i\}_{i \in I}$ with a corresponding family of fibers $\{F(U_i)\}_{i \in I}$, a selection of patch candidates $\{s_i\}_{i \in I}$ is a choice of one section s_i from each $F(U_i)$:

$$\{s_i\}_{i \in I} = \{s_i \mid s_i \in F(U_i) \text{ for each } F(U_i) \in \{F(U_i)\}_{i \in I}\}.$$


Example 8. Take the presheaf from Example 5:

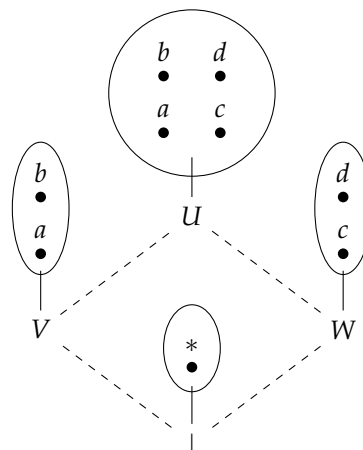


Let $\{V, W\}$ be the cover of interest:

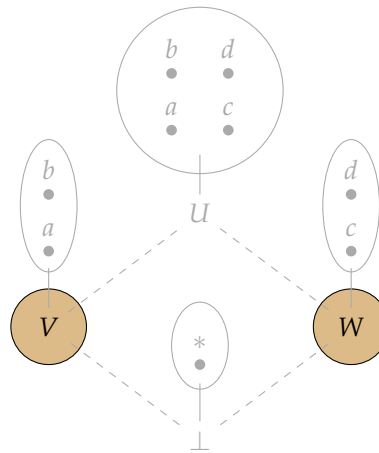

Over this cover, we have a corresponding family of fibers:

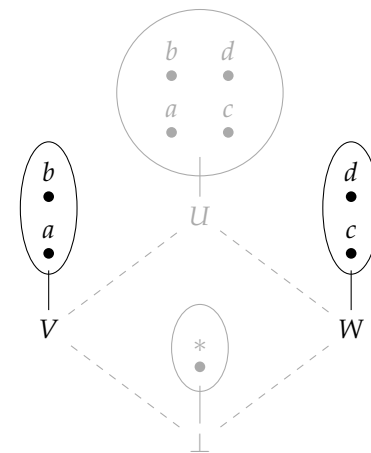

A selection of patch candidates is a choice of one section (element) from each fiber. For instance, we might pick b from $F(V)$ and c from $F(W)$:

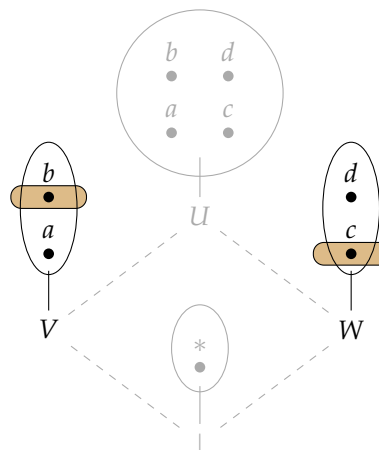

Similarly, we might pick $\{a, d\}$, $\{b, d\}$, or $\{a, c\}$, each of which is a valid selection of patch candidates.

Remark 8. Consider the empty cover. Since there are no sub-regions below the least element of a locale, there are no patch candidates we could choose for the empty cover either. Hence, any selection of patch candidates for the empty cover is \emptyset .


A selection of patch candidates might fit together, or they might not. We say they are compatible if they fit together, i.e., if they agree on overlaps. To check this, take any pair of patch candidates, and check if they restrict to the same data on their overlap.

Definition 11 (Compatible patch candidates). *Given two fibers $F(U_i)$ and $F(U_j)$ and a patch candidate from each, $s_i \in F(U_i)$ and $s_j \in F(U_j)$, s_i and s_j are compatible if they restrict to the same data on their overlap $U_i \wedge U_j$:*


$$\rho_{U_i \wedge U_j}^{U_i}(s_i) = \rho_{U_i \wedge U_j}^{U_j}(s_j).$$

A selection of patch candidates $\{s_i\}_{i \in I}$ is compatible if all of its members are pair-wise compatible.


Example 9. Consider the following presheaf F :

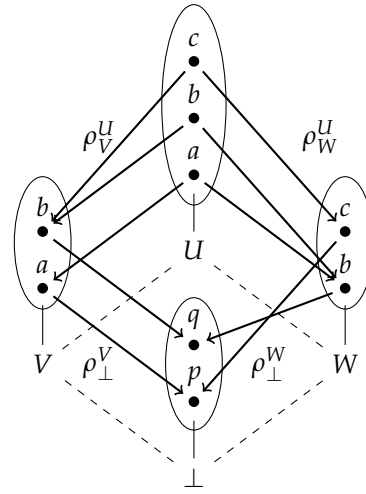

Take the cover $\{V, W\}$ and its corresponding fibers:

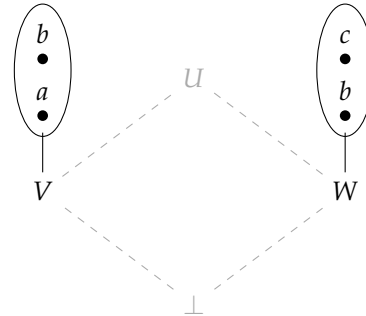


Suppose we pick $\{a, c\}$ for patch candidates:

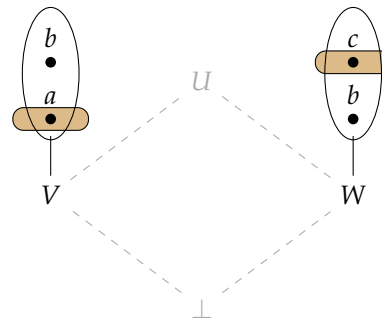


Is this selection compatible? We have to check if they agree on their overlap. The overlap $V \wedge W$ is \perp . Where does ρ_{\perp}^V send our chosen patch candidate a ? It sends it to p , since $\rho_{\perp}^V(a) = p$.


Where does ρ_{\perp}^W send our other chosen patch candidate b ? It also sends it to p , since $\rho_{\perp}^W(c) = p$. On the overlap \perp then, $\rho_{\perp}^V(a) = \rho_{\perp}^W(c)$, so a and c are compatible. This is easy to see in the diagram, since a and b both get sent to the same place:

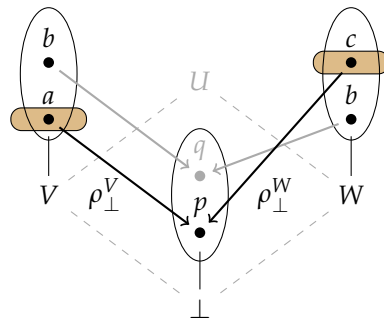


Now suppose we pick $\{b, b\}$ for patch candidates:

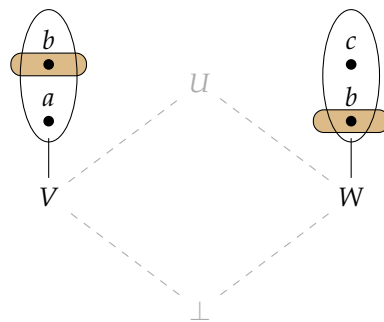


These are also compatible. They agree on their overlap (both restrict to q):

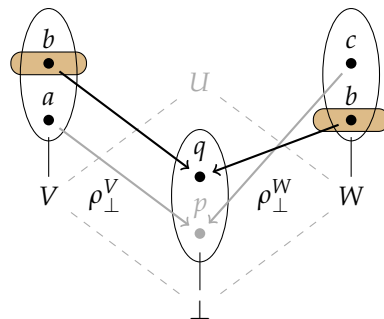

Finally, suppose we pick $\{a, b\}$ for patch candidates:

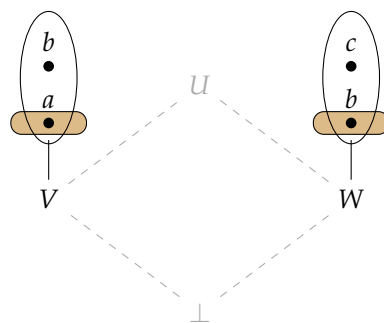

These are not compatible. They do not agree on their overlap:

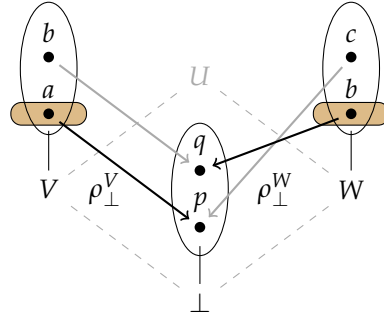

Remark 9. Consider the empty cover. Since any selection of patch candidates for the empty cover is empty, compatibility is satisfied vacuously.

As an analogy, if you ask your class to turn off all cell phones but nobody brought a cell phone to class, then your request is satisfied vacuously: there is simply nothing that needs to be done to make it happen. It's similar with the empty cover: since there are no patch candidates to check, compatibility is achieved vacuously.

If a selection of patch candidates s_i, \dots, s_k across a cover of U is compatible, we say those patches glue together if there's a section s in $F(U)$ that restricts down to exactly those patches.


Definition 12 (Gluing). Given a presheaf F and a selection of compatible patch candidates $\{s_i\}_{i \in I}$ for a cover $\{U_i\}_{i \in I}$, $\{s_i\}_{i \in I}$ glue together only if there is a section $s \in F(U)$ that restricts down to s_i on each fiber $F(U_i)$ of the cover, i.e., only if s is such that:

$$\rho_{U_i}^U(s) = s_i, \text{ for each } i \in I.$$


As a matter of terminology, if a section $s \in F(U)$ is glued from patches $\{s_i\}_{i \in I}$, we say that s is a global section of the cover, and each s_i is a local section of the cover. We may also say variously that s is glued from those patches, that s is composed of those patches, that those patches compose s , or that gluing those patches yields s .

A selection of patches $\{s_i\}_{i \in I}$ glues uniquely if there is one and only one such section $s \in F(U)$ that is glued from them.


Example 10. Take the presheaf from Example 9, and consider the cover $\{V, W\}$ again. Take the selection of patches $\{a, c\}$, which are compatible because they agree on overlap:

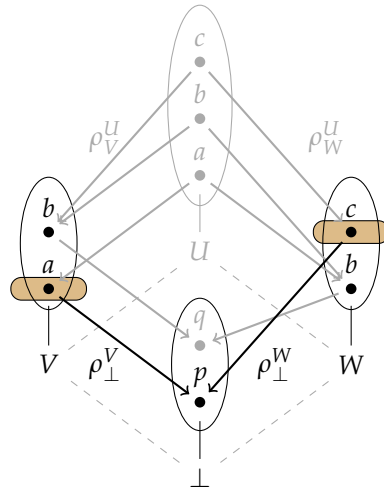


Even though a and c are compatible, they do not glue together, because there is no section in $F(U)$ that restricts down to them. Consider $a \in F(U)$ first. It restricts to $a \in F(V)$ on the left, but it does not restrict to $c \in F(W)$ on the right:

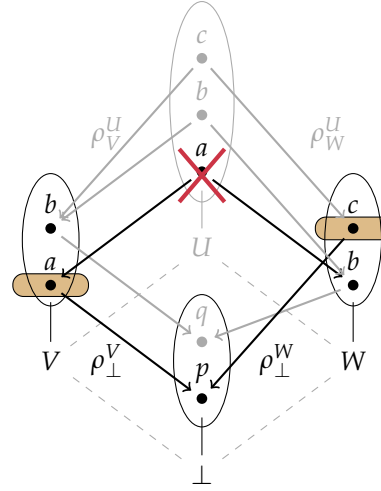

As for $b \in F(U)$, it restricts to neither $a \in F(V)$ on the left nor $c \in F(W)$ on the right:

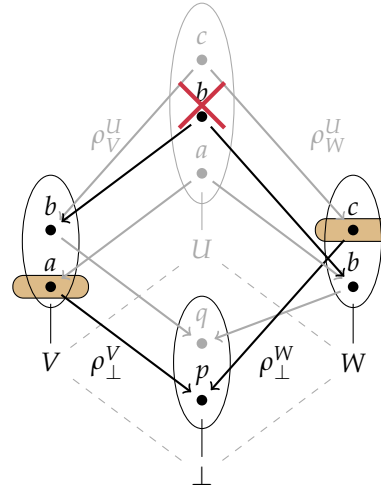


Finally, $c \in F(U)$ restricts to $c \in F(W)$ on the right, but not to $a \in F(V)$ on the left:

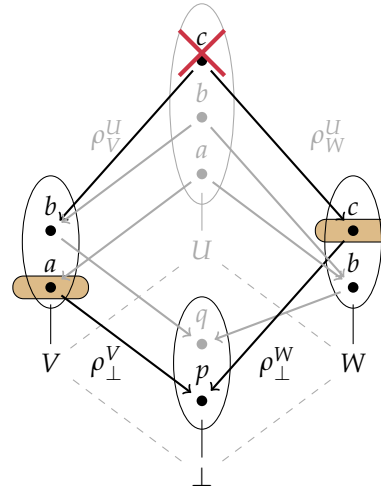


Thus, none of a, b , or c in $F(U)$ are glued from $\{a, c\}$, because none of them decompose into a on the left and c on the right.

Now suppose we pick $\{b, b\}$ for patch candidates. These do glue together (trivially), because there is a section in $F(U)$ (namely $b \in F(U)$) that restricts down to $b \in F(V)$ on the left and $b \in F(W)$ on the right:

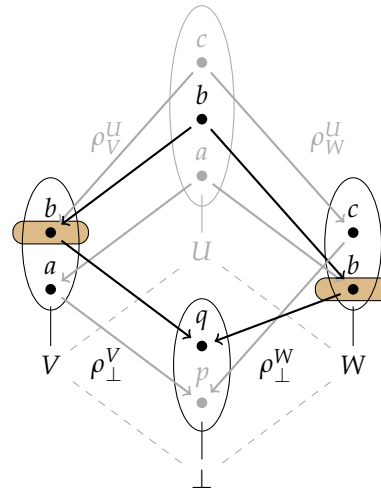

Example 11. Consider an example that glues together behaviors. Imagine a toy robot that looks something like a small tank: it has tracks on the left and right sides, and the two tracks are connected by a single drive controller. The controller either drives at a constant speed, or it sits idle. When it drives, it turns both tracks at the same speed.


Let's represent the robot as a locale. Let LT and RT be the left and right track assemblies respectively, let D be the drive controller that is shared by LT and RT, and let R be the whole robot (the join of LT and RT). As a picture:



For a presheaf, let's assign to each region the behaviors that are locally observable at that region:

- The drive controller D can either drive (turn) or sit idle.
- The left track assembly can each either $move_L$ or $stand-still_L$.
- The right track assembly can also either $move_R$ or $stand-still_R$.
- The entire robot can either move forward or sit stationary.


In a picture:

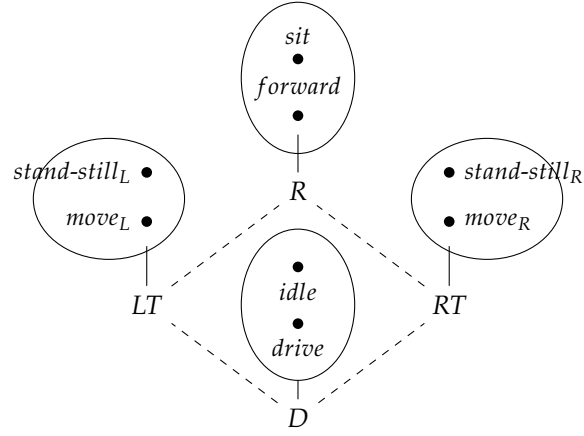

For the restriction maps, let's say that they restrict the observable behavior of a larger region to the observable behavior of the smaller region. For instance, if you are observing the whole robot moving forward (*forward*), and you then “zoom in” on the left track assembly, you'll see those tracks rotating (*move_L*).

- $\rho_{LT}^R(\text{sit}) = \text{stand-still}_L, \rho_{LT}^R(\text{forward}) = \text{move}_L$.
- $\rho_{RT}^R(\text{sit}) = \text{stand-still}_R, \rho_{RT}^R(\text{forward}) = \text{move}_R$.
- $\rho_D^{LT}(\text{stand-still}_L) = \text{idle}, \rho_D^{LT}(\text{move}_L) = \text{drive}$.
- $\rho_D^{RT}(\text{stand-still}_R) = \text{idle}, \rho_D^{RT}(\text{move}_R) = \text{drive}$.

In a picture:

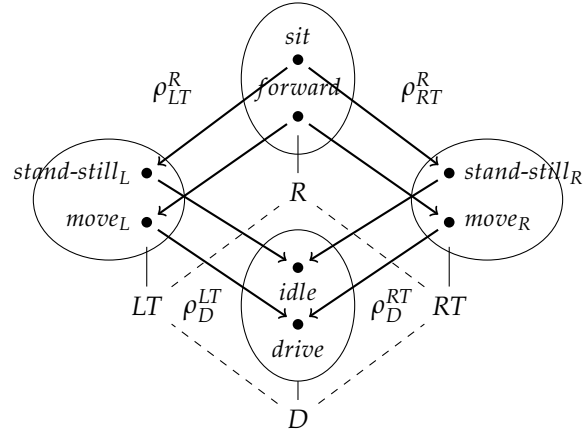

Now take the cover $\{LT, RT\}$ of R . The patch candidates $\{\text{move}_L, \text{move}_R\}$ are compatible, because they agree on overlap (they both restrict down to *drive*). But they also glue uniquely, yielding *forward*. In other words, the robot's forward motion is patched together precisely from the two pieces of its cover, namely the left tracks rotating (*move_L*) and the right tracks rotating (*move_R*).

Similarly, the Robot's sitting still (*sit*) behavior is also glued from the two pieces of its cover, namely the left track assembly standing still (*stand-still_L*) and the right track assembly standing still (*stand-still_R*).

Thus, there are two global sections of R 's behavior: moving forwards (patched together from its left and right motions), or standing still (patched together from its left and right lack of motion).

We can now state what it is to be a sheaf. A sheaf is a presheaf that satisfies a special gluing condition: namely, that for every cover, every compatible selection of patch candidates glues together uniquely.

Definition 13 (Sheaf). A presheaf F is a sheaf iff it satisfies the following condition (called “the gluing condition”):

(G0) For every cover $\{U_i\}_{i \in I}$ of a region U and every selection of patch candidates $\{s_i\}_{i \in I}$ for that cover, if $\{s_i\}_{i \in I}$ are compatible, then there exists a unique gluing $s \in F(U)$ of $\{s_i\}_{i \in I}$.

Remark 10. There is a subtlety regarding what sheaves look like over the least element of a locale. Note that the gluing condition is formulated as an implication. That is to say, it says that, for every cross-section of patch candidates, if that cross-section can glue, then it glues in exactly one way.


Next, consider the fact that the cover over the least region of a locale is an empty cover. Since there are no patch candidates that need to be checked for compatibility, there is nothing that needs to be done to get a “selection of glueable patch candidates.” Hence, the antecedent of the gluing condition is satisfied vacuously over the least element of the locale.

But since the empty cover satisfies the antecedent of the gluing condition vacuously, it follows that if a presheaf is to qualify as a sheaf, it must ensure that the consequent is satisfied over the empty cover as well. In other words, it must assign a unique glued section (a singleton set) to the least region of the locale. So, even though a presheaf may assign a larger set of data to the least element of a locale, a sheaf always assigns a singleton to that region.


Example 12. The presheaf from Example 9 fails to be sheaf, because as we saw in Example 10, there is a compatible selection of patch candidates (namely, $\{a, c\}$) which fails to glue. To be a sheaf, every compatible selection of patch candidates must glue.

Example 13. The presheaf from Example 11 fails to be a sheaf, because it does not assign a singleton to the lowest region of the underlying locale. In that example D is the lowest region of the locale, and $F(D) = \{p, q\}$, a set containing two elements. Hence, F fails to be a sheaf.

However, suppose we add a distinct bottom element to the locale:



If we assign a singleton set to \perp (so that $F(\perp) = \{*\}$, say), then F looks like this:

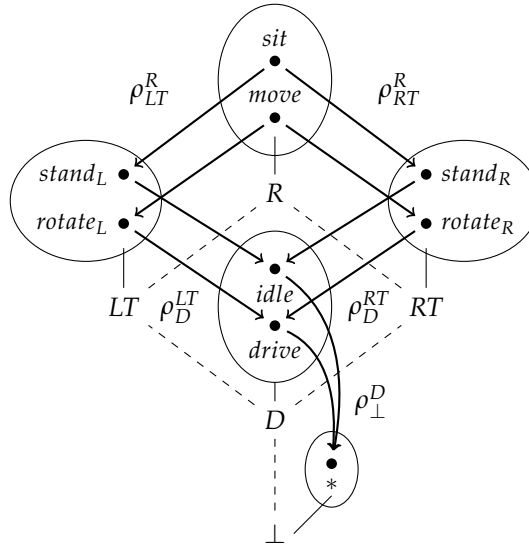

This modification ensures that F qualifies as a sheaf, since it ensures that all gluable selections of patch candidates (including the empty one) glue uniquely.

2.6. A Canonical Sheaf Construction

Not every presheaf is a sheaf, since some presheaves fail the gluing condition. However, there is a canonical procedure called “sheafification” that turns any presheaf into a sheaf. To sheafify a presheaf, add any missing sections that glue, then quotient sections that are locally indistinguishable. The result is guaranteed to be a sheaf, by construction.

For our purposes, there is a simplified version of sheafification that we can use to construct sheaves that model part-whole complexes in a natural way. Given a presentation of a locale, the recipe to build such a sheaf over it goes like this:

1. Assign local data to atomic regions.
2. Specify a gluing condition.
3. Recursively glue more and more pieces together until you can’t glue any more.

Let’s make this more precise. Given a presented locale, we can uniquely write each region as the join of its atomic regions.

Definition 14 (Atomic indices). Let $\mathbb{L} = \langle G, R \rangle$ be a presented locale with $G = \{U_1, \dots, U_n\}$. Let $\mathbb{A} \subseteq \{0, \dots, n\}$ be the indices of the atomic regions of G .

For any $U \in \mathbb{L}$, define its atomic support (denoted $I(U)$, or just I for short) as:

$$I(U) = \{i \in \mathbb{A} \mid U_i \preceq U\}$$

Then U can be written canonically as $U_{I(U)}$, the join of its atomic supports:

$$U_{I(U)} = \bigvee_{i \in I(U)} U_i.$$

Say something along the lines that there are many kinds of sheafs, and the fibers can have many different shapes. For instance, a standard example of a sheaf over a topological space is the set of real-valued functions defined over each region of that topology.

We’re going to focus on a simple kind of sparse sheaf. We will build this sheaf by assigning to atomic regions some basic data: to each atomic region U_k , we assign some

piece of data $\{\langle b_k \rangle\}$. What b_k is doesn't matter for our purposes at the moment. It just needs to be some piece of atomic data.

Then, we will glue together a selection of patch candidates $\{\langle b_1 \rangle\}$, $\{\langle b_2 \rangle\}$, and so on of atomic pieces of data to form $\{\langle b_1, b_2, \dots \rangle\}$. To decide when to glue such tuples together, we will define a gluing condition.

Talk about how we are going to imagine that each " b_k " represents something that occupies the region U_k . E.g., it's a chunk of matter, or a mechanical gadget, or whatever. But it is the part or stuff in that atomic region. The larger whole will then be built up by fusing together these parts according to the gluing condition.

A gluing condition is a family of predicates that say when a selection of patch candidates glue.

Definition 15 (Gluing condition). *A gluing condition \mathcal{G} is a family of predicates*

$$\mathcal{G}_U : \prod_{i \in I(U)} F(U_i) \rightarrow \{\text{true}, \text{false}\},$$

i.e. for each region $U \in \mathbb{L}$ a predicate over the Cartesian product of the fibers of the atomic support of U , that collectively satisfy the following coherence conditions:

(G1) Local data is glued. If $U_k \in \text{Atoms}(\mathbb{L})$ and $F(U_k) = \{\langle b_k \rangle\}$, then

$$\mathcal{G}_{U_k}(\langle b_k \rangle) = \text{true}.$$

(G2) Downward stability. If $\mathcal{G}_U(\langle b_i \rangle_{i \in I(U)}) = \text{true}$, then for each $V \preceq U$, we must have:

$$\mathcal{G}_V(\rho_V^U(\langle b_i \rangle_{i \in I(U)})) = \text{true}.$$

(G3) Upward stability. Given a selection of patch candidates $\langle b_i \rangle_{i \in I(U)}$, if $\mathcal{G}_{U_i \vee U_j}(\langle b_i, b_j \rangle) = \text{true}$ for each $i, j \in I(U)$, then we must have:

$$\mathcal{G}_U(\langle b_i \rangle_{i \in I(U)}) = \text{true}.$$

A sheaf can be generated from a gluing condition by starting with some local data on the atomic regions and then gluing all pieces together that satisfy the gluing condition.

Definition 16 (\mathcal{G} -sheaves). *Given a gluing condition \mathcal{G} and local data $F(U_k) = \{\langle b_k \rangle\}$ for each atomic region U_k , define for each region U :*

$$F(U) = \{\langle b_i \rangle_{i \in I(U)} \in \prod_{i \in I(U)} F(U_i) \mid \mathcal{G}_U(\langle b_i \rangle_{i \in I(U)}) = \text{true}\}.$$

For $V \preceq U$, define the restriction map

$$\rho_V^U : F(U) \rightarrow F(V) \quad \text{as} \quad \rho_V^U(\langle b_i \rangle_{i \in I(U)}) = \langle b_i \rangle_{i \in I(V)}.$$

Set $F(\perp) = \{\langle \rangle\}$, the empty tuple.

Remark 11. *Alternatively, given some local data and a gluing condition, define a presheaf over the given locale, call it F_φ , that assigns all combinations of local data to each region:*

$$F_\varphi(U) = \prod_{i \in I(U)} F(U_i).$$

Then filter by the gluing condition. That produces the same sheaf.

We must check that Definition 16 really defines a sheaf.

Theorem 1 (\mathcal{G} -sheaves are presheaves). *Given a gluing condition \mathcal{G} and an assignment of local data to the atomic regions of the underlying locale, the corresponding \mathcal{G} -sheaf is a presheaf.*

Proof. We must show that restrictions preserve identities and composition.

- *Identities.* ρ_U^U projects to the same index set, so $\rho_U^U = \text{id}_{F(U)}$.
- *Composition.* ρ_V^U restricts to the fiber over V , and ρ_W^V restricts to the fiber over W , so $\rho_W^V \circ \rho_V^U = \rho_W^U$.

We must also show that the restrictions are well defined.

- For $V \preceq U$, if $\langle b_i \rangle_{i \in I(U)} \in F(U)$, then by (G2) $\langle b_i \rangle_{i \in I(V)}$ satisfies \mathcal{G}_V , so ρ_V^U is well-defined. \square

Theorem 2 (\mathcal{G} -sheaves are sheaves). *Given a gluing condition \mathcal{G} and an assignment of local data to the atomic regions of the underlying locale, the corresponding \mathcal{G} -sheaf satisfies the gluing condition $G0$.*

Proof. We must show that every gluable selection of patch candidates $\langle b_i \rangle_{i \in I(U)}$ glues to yield a unique section in $F(U)$. Assume that we have a compatible selection of patch candidates $\langle b_i \rangle_{i \in I(U)}$. Then:

- Existence: we assumed the patch candidates are compatible. By (G3) then, $\langle b_i \rangle_{i \in I(U)} \in F(U)$.
- Uniqueness: let $s = \langle b_i \rangle_{i \in I(U)} \in F(U)$. If another section $t = \langle b_i \rangle_{i \in I(U)} \in F(U)$ were glued from the same components, then $s = t$, since both restrict to the same supports. \square

Throughout the rest of this paper, we will use \mathcal{G} -sheaves to model part-whole complexes, but that is only for simplicity of exposition. Any sheaf over a locale would do just as well.

3. Modeling Part-Whole Complexes as Sheaves

As noted in Section 1, the central claim of this paper is that we can model part-whole complexes as sheaves over locales. In particular, the locale provides the abstract parts space of “regions” the pieces can occupy, the sheaf assigns actual pieces to those regions, and the gluing condition determines when pieces fuse.

We can thus define the core mereological concepts of part and whole in sheaf-theoretic terms. Regarding wholes, we can identify fusion with gluing: to say that some pieces fuse or form a “fusion” is just to say that they are glued together. Regarding parts, to say that a piece is a “part” is just to say that it is a part of a fusion. In other words, the parts of a fusion are just the pieces from which it is glued together.

Definition 17 (Fusions and parts). *We say that a section $s \in F(U)$ is a fusion iff*

$$\mathcal{G}_U(s) = \text{true}.$$

Given $t \in F(V)$ and $s \in F(U)$ with $V \preceq U$ and $V \neq \perp$, we say t is a part of s , denoted $t \sqsubseteq s$, iff

$$\mathcal{G}_U(s) \quad \text{and} \quad \rho_V^U(s) = t.$$

Remark 12. $V \neq \perp$ because no parts can occupy \perp . The least region of the locale represents the combinatorial idea of no regions at all, and so it cannot be populated by any parts (hence in a \mathcal{G} -sheaf the sole section over \perp is the singleton $\langle \rangle$).

Sheaf theory thus provides a systematic framework with which to model a large variety of part-whole complexes in a “fusions-first” manner. In the rest of this section, we illustrate with examples.


Example 14. Consider a building with a west room, an east room, and a hallway between them. For simplicity, let us consider only the floors of the building (ignore walls, ceilings, and so on). The ambient locale is given by the presentation

$$\mathbb{L} = \langle G, R \rangle = \langle \{WR, H, ER\}, \emptyset \rangle$$

where

- $WR = \text{west room}$
- $H = \text{hallway}$
- $ER = \text{east room}$

As a Hasse diagram:

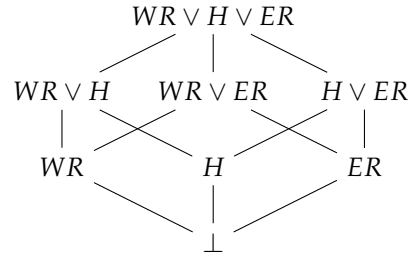

All of the generators are atomic, since none overlap (there are no meets among the generators):

$$\text{Atoms}(\mathbb{L}) = \{WR, H, ER\}$$

Let us define a \mathcal{G} -sheaf F that models the flooring of this building. For data, let there be the following available flooring materials:

$$M = \{\text{wood}, \text{tile}, \dots\}$$

For a gluing condition, let us say that sections glue if they contain the same materials:

- $\mathcal{G}_U(\langle b_i \rangle_{i \in I(U)}) = \text{true}$ iff $b_i = b_j$ for every $i, j \in I(U)$.
- false otherwise

We must check that this is a legitimate gluing condition.

Proof. We must show that \mathcal{G} satisfies the coherence conditions (G1)–(G3).

G1 *Local atomic data.* Trivial.

G2 *Downward stability.* We must show that if $\mathcal{G}_U(\langle b_i \rangle_{i \in I(U)}) = \text{true}$, then $\mathcal{G}_V(\rho_V^U(\langle b_i \rangle_{i \in I(U)})) = \text{true}$ for every $V \preceq U$. Assume the antecedent. Then $\rho_V^U(\langle b_i \rangle_{i \in I(U)}) = \langle b_i \rangle_{i \in I(V)}$.

- Case 1: if the length of $\langle b_i \rangle_{i \in I(V)} = 1$, it glues by (G1).
- Case 2: if the length of $\langle b_i \rangle_{i \in I(V)} \geq 2$, then by the assumption, $b_i = b_j$ for every $i, j \in I(V)$, so they glue.

G3 *Upward stability.* Given a selection of compatible patch candidates $\langle b_i \rangle_{i \in I(U)}$, we must show that if $\mathcal{G}_{U_i}(\langle b_i, b_j \rangle) = \text{true}$ for each $i, j \in I(U)$, then $\mathcal{G}_U(\langle b_i \rangle_{i \in I(U)}) = \text{true}$. Assume the antecedent. Since for every $i, j \in I(U)$, $b_i = b_j$ by the assumption, $\langle b_i \rangle_{i \in I(U)}$ glues. \square

For the atomic regions, fix a choice of local data:

- $F(WR) = \{\langle \text{wood} \rangle\}$
- $F(H) = \{\langle \text{wood} \rangle\}$
- $F(ER) = \{\langle \text{tile} \rangle\}$

Extend compatible data to meets, of which there is only \perp , so:

- $F(\perp) = \{\langle \rangle\}$

Recursively extend data to joins via gluing:

- $F(WR \vee H) = \{\langle \text{wood}, \text{wood} \rangle\}$, since $F(WR) = F(H) = \{\langle \text{wood} \rangle\}$, and $\text{wood} = \text{wood}$.
- $F(WR \vee ER) = \emptyset$, since $F(WR) = \{\langle \text{wood} \rangle\}$, $F(ER) = \{\langle \text{tile} \rangle\}$, and $\text{wood} \neq \text{tile}$.
- $F(H \vee ER) = \emptyset$, since $F(H) = \{\langle \text{wood} \rangle\}$, $F(ER) = \{\langle \text{tile} \rangle\}$, $\text{wood} \neq \text{tile}$.
- $F(WR \vee H \vee ER) = \emptyset$, since $F(WR \vee H) = \{\langle \text{wood}, \text{wood} \rangle\}$, $F(H \vee ER) = F(WR \vee ER) = \emptyset$, and $\text{wood} \neq \emptyset$.

In this building, there are two maximal fusions:

- The flooring of the west room and the hallway glue into one piece that covers both.
- The flooring that covers the east room is (trivially) glued into a single piece, namely itself.

Thus, the flooring of this building is really a collection of two independent fusions: the wooden floor that covers the east room and hallway, and the tiled floor that covers the east room. That implies:

- To separate the floors of the east room and hallway, you would have to use a saw to cut them, since they are fused. They are not merely sitting next to each other. Rather, they make up a single (fused) piece.
- By contrast, to separate the hallway and the east room, you would not need to cut them, since they are not fused. They simply happen to be sitting next to each other.

The parts of the fusions are clear:

- The wooden floor that covers the west room and the hallway has two parts: the wooden floor that covers the west room, and the wooden floor that covers the hallway.
- The tiled floor of the east room has no parts (in this locale), since it is not the fusion of other fusions.

In the previous example, none of the atomic regions overlapped. The locale was discrete, and thus the sheaf was free to glue or not glue pieces as it saw fit. The story is different if there are overlaps in the locale itself. Overlaps in the locale require overlaps in the sheaf.

Example 15. Consider the floor of a single room. Let us say that the regions of interest are its west half, its east half, and a six inch span where they overlap.

The ambient locale of this kind of space can be given by the presentation

- $L = \langle G, R \rangle = \langle \{\perp, WH, O, EH\}, \{\perp \preceq O, O \preceq WH, O \preceq EH\} \rangle$

where


- $WH = \text{west half}$
- $O = \text{overlap}$
- $EH = \text{east half}$

The atomic sections of this locale are:

- WH
- EH
- \perp

In particular, O is not an atomic region, because it is the non-trivial overlap of WH and EH .

Here is the Hasse diagram:

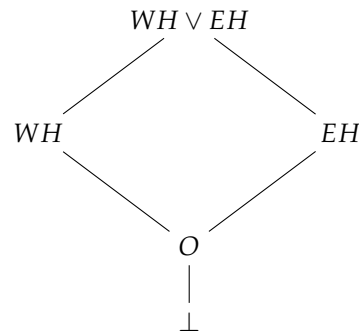


Let us define a \mathcal{G} -sheaf F that models the flooring of this room, using the same gluing condition from Example 14.

For the atomic regions, let us assign wood to both halves:

- $F(WH) = \{\langle \text{wood} \rangle\}$
- $F(EH) = \{\langle \text{wood} \rangle\}$


In a picture (omitting \perp for simplicity):

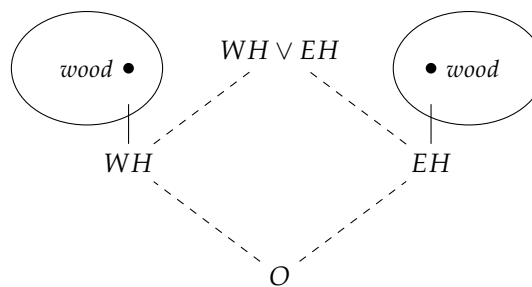

For the meet (the overlap O), the two halves restrict to the same thing:

- $F(O) = \{\langle \text{wood} \rangle\}$


Thus:

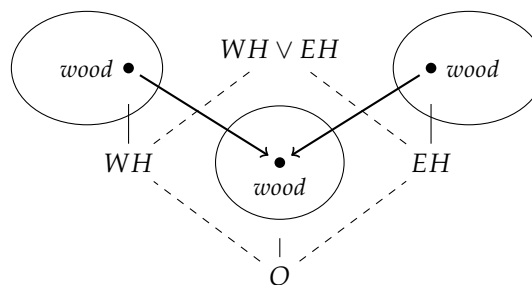

For the join, the west and east halves glue, since they're made from the same flooring materials and agree on their overlap:

- $F(WH \vee EH) = \{\langle \text{wood} \rangle\}$

Thus:

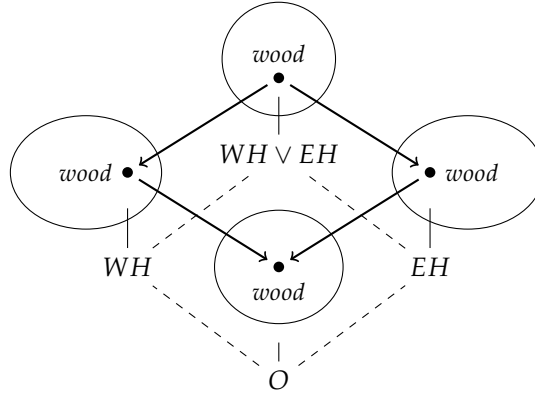


The maximal fusion is a single piece of wooden flooring that covers the whole room. Its parts are the west and east halves, and (transitively) their overlap. The west and east halves themselves have a shared part, the strip of overlap.

Example 16. To illustrate a failed attempt to build a sheaf, let us take the locale and gluing condition from Example 15, but let's assign different flooring materials to the atomic regions:

- $F(WH) = \{\langle \text{wood} \rangle\}$
- $F(EH) = \{\langle \text{tile} \rangle\}$


As a picture:

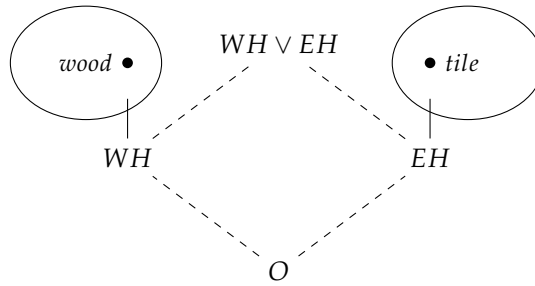

Next, we attempt to extend this data to meets, which requires that we restrict to the overlap, and then filter out anything that can't glue. Here, $F(WH)$ restricts to $\{\langle \text{wood} \rangle\}$, and $F(EH)$ restricts to $\{\langle \text{tile} \rangle\}$:

- $\rho_O^{WH}(\langle \text{wood} \rangle) = \langle \text{wood} \rangle$
- $\rho_O^{EH}(\langle \text{tile} \rangle) = \langle \text{tile} \rangle$

Thus:

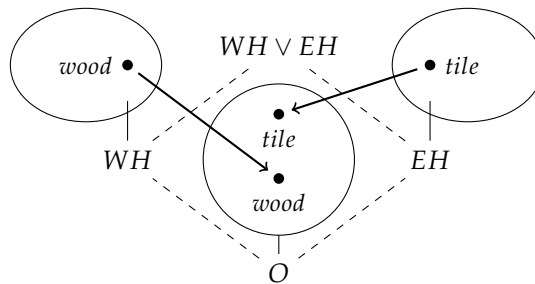

However, these cannot glue, because they are not the same. We see here that the data of WH and EH disagree on the overlap. Hence, we are unable to construct a coherent sheaf. This illustrates how sheaf theory requires and manages coherent gluing at all levels. Because it requires that pieces glue together coherently at every level of “zoom,” it prevents us from ever putting together an incoherent part-whole complex in the first place.

It is worth spelling the failure out explicitly. Since WH and EH disagree on their overlap, F cannot assign anything to O , so:

- $F(O) = \emptyset$

But that renders the restrictions ρ_O^{WH} and ρ_O^{EH} undefined, thereby severing our ability to zoom in and out. Thus, the system as a whole becomes incoherent.

Intuitively, this makes sense. If the western and eastern halves of a room were truly floored with different materials, then they would not overlap. There would be some sort of boundary between them where the one's materials end and the other's materials begin. But here, the ambient locale doesn't allow that possibility. In this particular locale, the western and eastern halves do overlap, so the sheaf must assign pieces to the different regions coherently, i.e., it must assign pieces that agree on their overlap.

The previous two examples were spatial. But parts come in non-spatial guises too, and sheaves can model them just as well.

Example 17. Suppose we say that human society (under some description) consists of the mesh of a specified set of relationships between the people that participate in that society.


Let P be the population in question (a finite set of individual people), and let the regions of our locale be subsets of such individuals. Then the ambient locale is given by the presentation:

- $\mathbb{L} = \langle G, R \rangle = \langle P, \emptyset \rangle$

For concreteness, suppose:

- $P = \{A \text{ (Alice)}, B \text{ (Bob)}, C \text{ (Carol)}, D \text{ (Denny)}\}$

Then the Hasse diagram is isomorphic to the powerset of P :

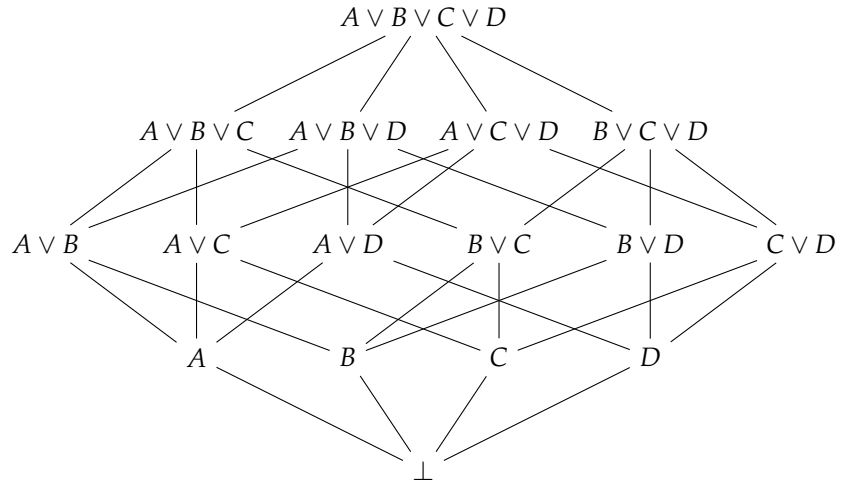

All of the generators are atomic, since there are no meets among the generators:

- $\text{Atoms}(\mathbb{L}) = \{A, B, C, D\}$

Let us define a \mathcal{G} -sheaf F that models the mesh of a selected set of relationships over P . To do that, let us first specify a set R that picks out the (binary, symmetric) relationships of interest:

- $R = \{f \text{ (friends)}, m \text{ (married)}, \dots\}$

For convenience, if $U, V \in P$, $r \in R$, and U and V stand in relationship r , we will write $r(U, V)$.

For a gluing condition, let us say that sections glue if they are connected by the same relations:

- $\mathcal{G}_U(\langle b_i \rangle_{i \in I(U)}) = \text{true}$ iff for every $r \in R$, $r(U_i, U_j) \in b_i$ iff $r(U_j, U_i) \in b_j$, for every $i, j \in I(U)$

- false otherwise


We must check that this is a legitimate gluing condition.

Proof. The proof is the same as before. \square

For the atomic regions, let us fix a choice of local data by assigning to each person the relations they stand in, e.g.:

- $F(A) = \{\langle\{f(A, B), f(A, C), m(A, B)\}\rangle\}$
- $F(B) = \{\langle\{f(B, A), m(B, A), f(B, D)\}\rangle\}$
- $F(C) = \{\langle\{f(C, A), m(C, D)\}\rangle\}$
- $F(D) = \{\langle\{f(D, B), m(D, C)\}\rangle\}$

To visualize this data, we can picture each fiber as a mini-graph:

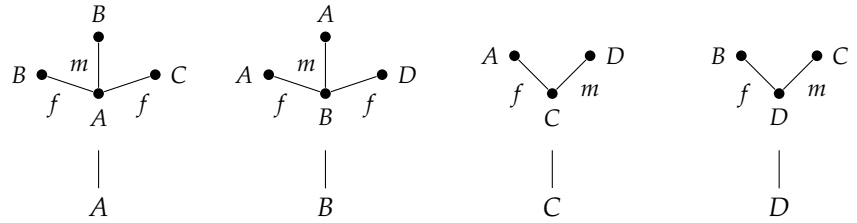

For example, in the fiber over A:

- The f-labeled edge from A to B represents $f(A, B)$: A and B are friends.
- The m-labeled edge from A to B represents $m(A, B)$: A and B are married.
- The f-labeled edge from A to C represents $f(A, C)$: A and C are friends.


Next, we must extend compatible data to meets, of which there is only \perp , so:

- $F(\perp) = \{\langle\rangle\}$


Finally, we must extend atomic data to binary joins via gluing. The gluing condition essentially says that mini-graphs can be glued along shared edges, provided that they share exactly the same edges. To see how this works, consider (for example) the mini-graphs over A and C:



Can these be glued? The answer is yes, because they share exactly one edge, namely the one labeled f. If you rotate the graphs sideways a bit, you can see how they can be merged along $f(A, C)$:

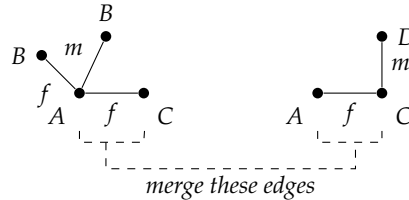


Merging along $f(A, C)$ yields the following glued graph:




By gluing binary joins in this fashion, we get:

- $F(A \vee B) = \{\langle \{f(A, B), m(A, B), f(A, C)\}, \{f(B, A), m(B, A), f(B, D)\} \rangle\}$
- $F(A \vee C) = \{\langle \{f(B, A), m(B, A), f(B, D)\}, \{f(C, A), m(C, D)\} \rangle\}$
- $F(A \vee D) = \emptyset$
- $F(B \vee C) = \emptyset$
- $F(B \vee D) = \{\langle \{f(B, A), m(B, A), f(B, D)\}, \{f(D, B), m(D, C)\} \rangle\}$
- $F(C \vee D) = \{\langle \{f(C, A), m(C, D)\}, \{f(D, B), m(D, C)\} \rangle\}$

As pictures:

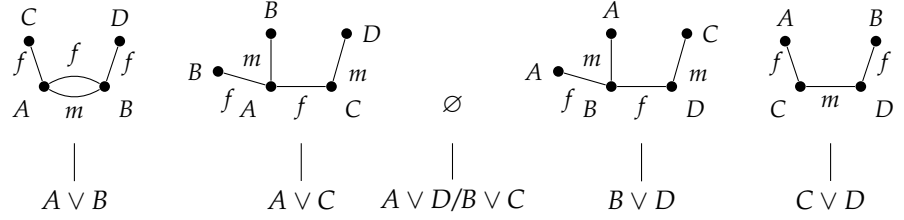

Having glued joins of two regions, we must next glue joins of three atomic regions. For instance, take $B \vee C \vee D$. We can glue $B \vee C$ trivially (because they share no edges), we can glue $C \vee D$ along their shared f -edge, and we can glue $B \vee D$ along their shared f -edge. That yields:




By gluing all joins of three atomic regions in this fashion, we get:

- $F(A \vee B \vee C) = \left\{ \langle \{f(A, B), f(A, C), m(A, B)\}, \{f(B, A), m(B, A), f(B, D)\}, \{f(C, A), m(C, D)\} \rangle \right\}$
- $F(A \vee B \vee D) = \left\{ \langle \{f(A, B), f(A, C), m(A, B)\}, \{f(B, A), m(B, A), f(B, D)\}, \{f(D, B), m(D, C)\} \rangle \right\}$
- $F(A \vee C \vee D) = \left\{ \langle \{f(A, B), f(A, C), m(A, B)\}, \{f(C, A), m(C, D)\}, \{f(D, B), m(D, C)\} \rangle \right\}$
- $F(B \vee C \vee D) = \left\{ \langle \{f(B, A), m(B, A), f(B, D)\}, \{f(C, A), m(C, D)\}, \{f(D, B), m(D, C)\} \rangle \right\}$

At the top-most join, gluing four regions, we get:

- $F(A \vee B \vee C \vee D) = \left\{ \langle \{f(A, B), f(A, C), m(A, B)\}, \{f(B, A), m(B, A), f(B, D)\}, \{f(C, A), m(C, D)\}, \{f(D, B), m(D, C)\} \rangle \right\}$

As a picture:



The resulting sheaf yields a fused mesh of relationships over the population, which is glued together from smaller meshes over smaller subsets of the population.

- Each atomic fiber is a part of the whole (human society), and its data encodes the internal (relational) structure of that part.
- Mereological overlap is then modeled by shared relationships: two parts overlap if their relational graphs intersect coherently.
- Failure to glue (as in $F(A \vee D) = \emptyset$ and $F(B \vee C) = \emptyset$) reflects mereological separation: the atomic regions in question cannot be fused because they are not related in this mesh.

For another example, consider processes. A process (or more generally any sequence of events, states, etc.) can be seen as a part-whole complex too.

Example 18. Imagine a scenario where something can do one of two things repeatedly: at each step, it can do one thing (“option a”) or another thing (“option b”), and then repeat the choice again.

To model this, fix a finite alphabet $\Sigma = \{a, b\}$, with “a” for “option a” and “b” for “option b.” Then let Σ^* be the set of all finite sequences (words) over Σ , with ϵ denoting the empty sequence. For instance, the sequence aab represents the sequence of length 3 that picks “option a” first, then “option a” again, and then finally “option b.”

Let us say that $\Sigma^{\leq n}$ is the set of all finite sequences less than length n , and let us say that Σ^n is the set of finite sequences of exactly length n . Hence:


- $\Sigma^0 = \{\epsilon\}$.
- $\Sigma^1 = \Sigma^{\leq 1} = \{\epsilon, a, b\}$.
- $\Sigma^{\leq 2} = \{\epsilon, a, b, aa, bb, ab, ba\}$.
- $\Sigma^2 = \{aa, bb, ab, ba\}$.
- Etc.

Given sequences $w, v \in \Sigma^{\leq n}$ with $\text{length}(w) \leq \text{length}(v)$, let us write $w \subseteq v$ to denote that w is a prefix of v , as in $aab \subseteq aabc$.

Next, define a topology over $\Sigma^{\leq n}$ by setting the open sets to be sequences that share a prefix:

- $U_w = \{v \in \Sigma^{\leq n} \mid w \subseteq v\}$.

So U_w consists of all sequences that continue w . For instance, if $w = aab$, then we might picture U_w as a kind of bouquet or bundle of sequences that are all bound at their shared stem (aab) but then branch out in different directions:

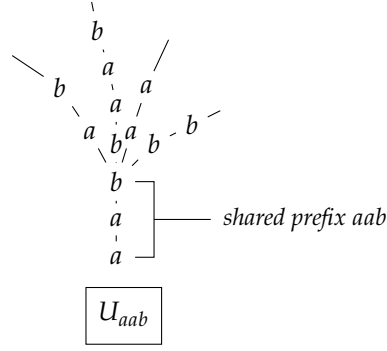

We can form a locale from this topology. Let \mathbb{L} be the locale given by the presentation $\langle G, R \rangle$, where:

- $G = \{U_w \mid w \in \Sigma^n\}$, i.e., each open is a generator.
- $R = \{U_w \preceq U_v \mid v \subseteq w\}$, i.e., bouquets with longer prefixes are lower.


For example, given $\Sigma^{\leq 2}$, we have the following generators:

- $G = \{U_\epsilon, U_a, U_b, U_{aa}, U_{bb}, U_{ab}, U_{ba}\}$.

Here are some of the relations:

- $U_{aa} \preceq U_a$ and $U_{ab} \preceq U_a$, since “a” is a prefix of aa and ab.
- $U_{bb} \preceq U_b$ and $U_{ba} \preceq U_b$, since “b” is a prefix of bb and ba.
- Every generator is lower than U_ϵ , since ϵ (the empty sequence) is a prefix of every sequence.

The Hasse diagram looks like this:

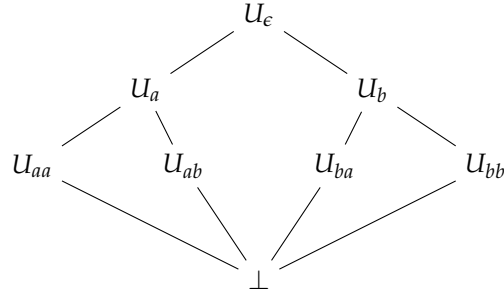

Think of moving upwards in this locale as forgetting information about (or alternatively, as committing less to) the history of the sequence. For example, think of U_{ab} as a region where we know that “a” happened first and then “b” happened, but think of U_a as a region where we know only that “a” happened first and we don’t know what happened after that. The top element is U_ϵ , which means we don’t know anything about the sequence of actions. The \perp element indicates not that we know nothing, but that there is no sequence at all.

Notice that implication moves upwards: U_{ab} implies U_a because if I know (at U_{ab}) that “a” happened first and then “b” happened, then I certainly know that “a” happened first.

Further, no generator is the non-trivial overlap of other generators, so every generator is an atomic region:

- $\text{Atoms}(\mathbb{L}) = G$

As with any locale, we can write each region canonically as the join of its atomic regions:

- $U_{I(U)} = \bigvee_{i \in I(U)} U_i$

But here, what this means is that we can canonically write each region as the join of its “most specified” prefixes. For instance, $I(U_a) = \{aa, ab\}$, so:

- $U_a = U_{I(U_a)} = \bigvee \{U_{aa}, U_{ab}\}$.

This makes sense. Since U_a is a region where we know only that “a” happened first, it is the join of all maximal continuations that begin with “a.”

This particular locale is interesting because it models the “process space” of any 2-stage sequence that can make one of two choices at each stage. Let us now assign some actual processes to this ambient space, using a \mathcal{G} -sheaf.

Imagine a machine m that can run multiple concurrent processes, all of whom share the same memory. For simplicity, let us suppose that the machine has two registers ($R = \{r_1, r_2\}$), each of which can hold one bit (1 or 0). So, at any point in time the machine’s memory state $S : \{0, 1\} \times \{0, 1\}$ can be one of the following:

- $S = \{\langle 0, 0 \rangle, \langle 1, 0 \rangle, \langle 0, 1 \rangle, \langle 1, 1 \rangle\}$, with initial state $s_0 = \langle 0, 0 \rangle$.

We can think of the concurrent processes of interest as a selection of programs that we want to run on the machine all at the same time. In terms of behavior, let us say that each program-run reads a word from its input stream, one character at a time, and in response to each character, it takes one of the following actions A : it writes a value (1 or 0) to one of the registers, it writes (possibly distinct) values to both registers, or it does nothing and leaves the registers as they are:

- $A = \{\{r_1 \mapsto v\}, \{r_2 \mapsto v\}, \{r_1 \mapsto v, r_2 \mapsto w\}, \emptyset\}$, where $v, w \in \{0, 1\}$.

We can define a process (program trace) as a map from n -length words to n -length sequences of write actions, where we require that such maps agree on prefixes (since a process responding to ab and aa would do the same thing on the first a). This way, a program trace records for each input stream the sequence of write actions that result. For concreteness, here are two such traces:

- $f : \Sigma^2 \rightarrow A \times A$
 - $f(aa) = \langle \{r_1 \mapsto 1\}, \{r_1 \mapsto 0\} \rangle$
 - $f(ab) = \langle \{r_1 \mapsto 1\}, \{r_2 \mapsto 0\} \rangle$
 - $f(bb) = \langle \{r_2 \mapsto 0\}, \{r_2 \mapsto 1\} \rangle$
 - $f(ba) = \langle \{r_2 \mapsto 0\}, \{r_1 \mapsto 1\} \rangle$
- $g : \Sigma^2 \rightarrow A \times A$
 - $g(aa) = \langle \{r_2 \mapsto 0\}, \{r_2 \mapsto 0\} \rangle$
 - $g(ab) = \langle \{r_2 \mapsto 0\}, \emptyset \rangle$
 - $g(bb) = \langle \{r_1 \mapsto 1\}, \{r_1 \mapsto 0\} \rangle$
 - $g(ba) = \langle \{r_1 \mapsto 1\}, \{r_1 \mapsto 1\} \rangle$

Let us now say that concurrent processes are compatible if they “play well” together, i.e., they share resources (memory) consistently. In particular, given two processes f and g , let us say:

- f and g are compatible at stage n if they write to different registers.
- f and g are compatible at stage n if they write the same value to the same register.
- f and g conflict at stage n if they write different values to the same register.

We can formalize this notion as a gluing condition that says a selection of patch candidates glue at U_w if they play well up to w . Fix a selection of programs $P = \{f, g, \dots\}$ to run on the machine, then:

- Given a selection of patch candidates $\langle (b_{i,p})_{p \in P} \rangle_{i \in I(U_w)}$ over a region U_w with trace length $|w|$, $\mathcal{G}_{U_w}(\langle b_i \rangle_{i \in I(U_w)}) = \text{true}$ iff the following condition holds. Write $b_{i,p}[m]$ to denote the write actions of process p in region i at stage m . Then, require that at each stage $m \leq |w|$ and every register $r \in R$, the set

$$\{v \in \{0, 1\} \mid \exists i \in I(U_w), p \in P \text{ where } r \mapsto v \in b_{i,p}[m]\}$$

has cardinality at most 1. In other words, two values are not written to the same register.

- $\mathcal{G}_{U_w}(\langle b_i \rangle_{i \in I(U_w)}) = \text{false}$ otherwise.

We must check that this is a legitimate gluing condition.

Proof. We must check that \mathcal{G}_{U_w} is downwards and upwards stable.

- *Downwards stability.* Assume that $\mathcal{G}_{U_w}(\langle b_i \rangle_{i \in I(U_w)}) = \text{true}$. Then $\mathcal{G}_{U_i}(\langle b_i \rangle) = \text{true}$ for each $i \in I(U_w)$ since by \mathcal{G}_{U_w} , every b_i, b_j play well on their prefixes.
- *Upwards stability.* Assume $\mathcal{G}_{U_{\{i,j\}}}(\langle b_i, b_j \rangle) = \text{true}$ for all $i, j \in I(U_w)$. Then $\mathcal{G}_{U_w}(\langle b_i \rangle_{i \in I(U_w)}) = \text{true}$ since no i, j conflict on writes. \square

With a gluing condition at hand, we can now define a \mathcal{G} -sheaf F . Let our selection of processes be $P = \{f, g, \dots\}$. Then, we can fix the atomic data (omitting outer brackets to avoid clutter):

- $F(U_{aa}) = (f(aa), g(aa)) = (\langle \{r1 \mapsto 1\}, \{r1 \mapsto 0\} \rangle, \langle \{r2 \mapsto 0\}, \{r2 \mapsto 0\} \rangle)$.
- $F(U_{ab}) = (f(ab), g(ab)) = (\langle \{r1 \mapsto 1\}, \{r2 \mapsto 0\} \rangle, \langle \{r2 \mapsto 0\}, \emptyset \rangle)$.
- $F(U_{bb}) = (f(bb), g(bb)) = (\langle \{r2 \mapsto 0\}, \{r2 \mapsto 1\} \rangle, \langle \{r1 \mapsto 1\}, \{r1 \mapsto 0\} \rangle)$.
- $F(U_{ba}) = (f(ba), g(ba)) = (\langle \{r2 \mapsto 0\}, \{r1 \mapsto 1\} \rangle, \langle \{r1 \mapsto 1\}, \{r1 \mapsto 1\} \rangle)$.

There are no meets among the generators beyond \perp , so:

- $F(\perp) = \{\langle \rangle\}$.

Next, we must extend F to joins via gluing. So, for each U_w , we must assign:

- $F(U_w) = \{(\langle b_{i,p} \rangle_{p \in P})_{i \in I(U_w)} \mid \mathcal{G}_{U_w}(\langle \langle b_{i,p} \rangle_{p \in P} \rangle_{i \in I(U_w)}) = \text{true}\}$.

Let's compute $F(U_a) = F(U_{aa} \vee U_{ab})$. To determine if $(f(aa), g(aa))$ and $(f(ab), g(ab))$ glue, we need to check that they do not write conflicting values.

- Stage 1 (at the shared prefix "a"): $f(aa)$ and $f(ab)$ write 1 to $r1$, while $g(aa)$ and $g(ab)$ write 0 to $r2$. Since f and g write to different registers, there is no conflict.
- Stage 2: $f(ab)$ and $g(aa)$ write the same value (namely, 0) to $r2$, $f(aa)$ writes 0 to $r1$, and $g(ab)$ does nothing, so there are no conflicts.

Hence, $(f(aa), g(aa))$ and $(f(ab), g(ab))$ glue to form a unique section:

- $F(U_a) = (f(aa), g(aa)), (f(ab), g(ab))$

Now let's compute $F(U_b) = F(U_{bb} \vee U_{ba})$. To determine if $(f(bb), g(bb))$ and $(f(ba), g(ba))$ glue, we need to again check for conflicting writes:

- Stage 1 (at the shared prefix "b"): $f(bb)$ and $f(ba)$ write 0 to $r2$, while $g(bb)$ and $g(ba)$ write 1 to $r1$, so there is no conflict.
- Stage 2: $f(bb)$ and $f(ba)$ write 1 to different registers, so they do not conflict with each other, while $f(ba)$ and $g(ba)$ write 1 to $r1$, so they do not conflict either. However, $g(bb)$ writes 0 to $r1$, which conflicts with $g(ba)$'s and $f(ba)$'s attempt to write 1 to the same register.

Since we have a conflict, $(f(bb), g(bb))$ and $(f(ba), g(ba))$ fail to glue over U_b . Notice:

- The processes f and g agree locally at U_a .
- By contrast, they disagree locally at U_b .
- There is no global section that glues together all of f and g 's behavior at the top U_e , thus f and g are not globally compatible processes.

This sort of example illustrates how sheaves can model processes, concurrency, and resource conflicts. Here the processes were programs running on a simple machine, but they could just as easily be biological processes competing for resources, etc.

Whatever the concrete details may be, this example captures how local behavior can be integrated and extended over larger regions of the process space. One might naively think that the "parts" of such systems are the processes. But there is a different way to slice it: if you want to talk about the integrity of the "whole" of a concurrent system, you need to talk about how that involves coherent, integrated behavior that is functionally united locally across the various "regions" and "stages" of the system's evolution.

TODO:

- Add example: something over a continuous interval/timeline? E.g., maybe something over a timeline (the frame of opens taken from the usual topology of \mathbb{R})? Maybe we can define a gluing condition for a mass of clay over time that says pieces glue if they agree on overlaps, so that the whole lump of clay can have parts replaced over time but as a whole it never breaks into fragments? Maybe the "closure" is even a modality.
- Add example: Socrates and seated Socrates?
- Note Spivak et al's behavioral mereology is an example of a \mathcal{G} -sheaf (and check the details to make sure that's really true).
- Mormann's "structural mereology" is basically just our thesis. Add examples from his similarity structures.

4. Modalities in the Sheaf-theoretic Setting

In the context of sheaves, modalities manifest as j -operators (also called local operators). A j -operator is a closure operator on the underlying locale.

Definition 18 (j -operators). *Given a locale \mathbb{L} , a j -operator on \mathbb{L} is a closure operator $j : \mathbb{L} \rightarrow \mathbb{L}$ satisfying the following conditions:*

- (J1) Inflation. $U \leq j(U)$.
- (J2) Idempotence. $j(j(U)) = j(U)$.
- (J3) Meet-preservation. $j(U \wedge V) = j(U) \wedge j(V)$.

A j -operator induces a j -sheaf.

Definition 19 (j -sheaves). *Given a sheaf F over a locale \mathbb{L} and a j -operator $j : \mathbb{L} \rightarrow \mathbb{L}$, the corresponding j -sheaf, denoted F_j , is given by:*

$$F_j = F(j(U)).$$

Remark 13. *In a sheaf, there are a variety of other modalities beyond the traditional alethic ones (necessity and possibility). Any closure operator qualifies as a modality of some description.*

Example 19. *From Example 17, recall the mesh of human relationships modeled by a \mathcal{G} -sheaf F defined over the presented locale $\mathbb{L} = \langle P := \{A, B, C, D\}, \emptyset \rangle$. Let us define a family of "reachability" modalities over this mesh.*

For each $r \in R$, write \rightsquigarrow_r for the reflexive and transitive closure of r on the generators. Hence, \rightsquigarrow_f is the transitive closure of friendship on the generators, and \rightsquigarrow_m is the transitive closure on marriage.

Then for each $r \in R$, define j_r inductively:

- Base case. *For each generator $U \in G$, set j_r to the join of all other generators reachable via r :*

$$j_r(U) := \bigvee \{V \mid U \rightsquigarrow_r V\}$$

- Inductive step. *Extend to arbitrary joins $U_{I(U)}$:*

$$j_r(U_{I(U)}) := \bigvee_{i \in I(U)} j_r(U_i)$$

We need to check that this is a j -operator.

Proof. We check (J1)–(J3) from the definition.

Do the base case, then the inductive step.

□

Intuitively, this operator expands every region U to the largest region that is reachable from U by r . In other words, it expands each subset of society to the largest subset of society that is connected by r . Hence, $j_f(U)$ yields all those who are connected to U through a chain of friends, while $j_m(U)$ yields all those who are connected to U through a chain of marriage (which in a monogamous society will yield only married couples but in a polygamous society may be more revealing).

Applying j_f (for instance) to \mathbb{L} yields the following:

- $j_f(A) = A \vee B \vee C \vee D$, because $A \rightsquigarrow_f A$, $A \rightsquigarrow_f B$, $A \rightsquigarrow_f D$, and $A \rightsquigarrow_f C$.
- $j_f(B) = A \vee B \vee C \vee D$, because $B \rightsquigarrow_f B$, $B \rightsquigarrow_f D$, $B \rightsquigarrow_f A$, and $B \rightsquigarrow_f C$.
- Similar for $j_f(C)$ and $j_f(D)$.
- $j_f(\perp) = \perp$.

Hence, everyone in this mini-society is connected through friends (or friends-of-friends, etc.). Notice also that everyone is connected immediately, i.e., at the first application of j_f .

When it comes to marriage, the situation is different. Applying j_m yields:

- $j_m(A) = A \vee B$, because $A \rightsquigarrow_m A$ and $A \rightsquigarrow_m B$.
- $j_m(B) = A \vee B$, because $B \rightsquigarrow_m B$ and $B \rightsquigarrow_m A$.
- $j_m(C) = C \vee D$, because $C \rightsquigarrow_m C$ and $C \rightsquigarrow_m D$.
- Similar for $j_m(D)$.
- $j_m(A \vee B) = A \vee B$, since A and B are already connected.
- $j_m(C \vee D) = C \vee D$, since C and D are already connected.
- $j_m(A \vee C) = A \vee B \vee C \vee D$, since from A , A can reach B (i.e., $A \rightsquigarrow_m B$) and from C , C can reach D (i.e., $C \rightsquigarrow_m D$).
- Similar for the rest.

In contrast to the j_f modality, the j_m modality keeps the A, B component separate from the C, D component at all regions (sub-populations) that don't include a member of both couples, just as we would expect.

Now that we have defined j_f and j_m , we can construct a modal overlay for each that we can use to filter the original mesh:

- Define the friendship mesh as F_f , filtered by j_f , i.e., set $F_f(U) := F(j_f(U))$.
- Define the marriage mesh as F_m , filtered by j_m , i.e., $F_m(U) := F(j_m(U))$.

Example 20. Recall the example of concurrent processes f and g from Example 18. We can define an “already happened” modality that captures what has definitely occurred so far.

Definition 20 (Already-happened operator). Let j_H be given by:

$$j_H(U_w) := \bigvee \{U_v \mid v \subseteq w\},$$

i.e., the join of all opens corresponding to prefixes of w (including w itself).

Intuitively, $j_H(U_w)$ is the region that remembers everything that has already happened along w . It is a closure operator that closes upwards by collecting all shorter prefixes.

We must check that this is a legitimate j -operator.

Proof. We check (J1)–(J3).

- J1 *Inflation.* $U_w \preceq j_H(U_w)$ holds because U_w is included among the prefixes being joined.
- J2 *Idempotence.* Applying j_H again adds no new prefixes, so $j_H(j_H(U_w)) = j_H(U_w)$.

J3 *Meet-preservation.* The meet of two regions corresponds to their longest shared prefix, whose prefixes are all of the prefixes collected by j_H . Hence, $j_H(U_w \wedge U_v) = j_H(U_w) \wedge j_H(U_v)$. \square

Applying j_H to the generators of \mathbb{L} :

- For U_{aa} : $j_H(U_{aa}) = U_\epsilon \vee U_a \vee U_{aa}$.
- For U_{ab} : $j_H(U_{ab}) = U_\epsilon \vee U_a \vee U_{ab}$.
- For U_{ba} : $j_H(U_{ba}) = U_\epsilon \vee U_b \vee U_{ba}$.
- For U_{bb} : $j_H(U_{bb}) = U_\epsilon \vee U_b \vee U_{bb}$.
- For U_a : $j_H(U_a) = U_\epsilon \vee U_a$.
- For U_b : $j_H(U_b) = U_\epsilon \vee U_b$.
- For U_ϵ : $j_H(U_\epsilon) = U_\epsilon$.

Since j_H filters each region to everything that is already determined in that region, we can use it to define an overlay of F

$$F_H(U_w) := F(j_H(U_w)),$$

so that sections at U_w remember only what has happened along all prefixes of w .

Example 21. Recall the example of concurrent processes f and g from Example 18. We can define a safety (“nothing bad happens”) modality as a j -operator that identifies the largest safe extensions of a given region.

Definition 21 (Safety operator). Let us say that a region U is safe if all processes in $F(U)$ play well together, i.e., if there are no write conflicts. Then let $j_S : \mathbb{L} \rightarrow \mathbb{L}$ be given by:

$$j_S(U) := \begin{cases} \bigvee \{V \mid U \preceq V \text{ and } V \text{ is safe}\} & \text{if this join is non-empty} \\ U & \text{otherwise.} \end{cases}$$

Intuitively, $j_S(U)$ inflates U to the largest region that is guaranteed safe starting from U .

We must check that $j_S(U)$ is a legitimate j -operator.

Proof. We check (J1)–(J3).

- J1 *Inflation.* By construction, $U \preceq j_S(U)$ whenever U has any safe parent regions, otherwise $j_S(U) = U$.
- J2 *Idempotence.* Applying j_S more than once does not change the result, since applying it once takes the join of all safe parents. Hence, $j_S(j_S(U)) = j_S(U)$.
- J3 *Meet-preservation.* For any U and V , since $U \wedge V$ is U or V ,

$$j_S(U \wedge V) = \bigvee \{W \mid U \wedge V \preceq W \text{ and } W \text{ safe}\} = j_S(U) \wedge j_S(V). \quad \square$$

Let's apply j_S to the generators of \mathbb{L} :

- $j_S(U_{aa}) = U_a$ since its safe parent regions are U_{aa} and U_a .
- Similarly, $j_S(U_{ab}) = U_a$.
- $j_S(U_{ba}) = U_{ba}$ because the only safe parent of U_{ba} is U_{ba} itself.
- Similarly, $j_S(U_{bb}) = U_{bb}$.

Now extend it to joins:

- $j_S(U_a) = j_S(U_{aa}) \vee j_S(U_{ab}) = U_a \vee U_a = U_a$.
- $j_S(U_b) = U_b$ since U_b is unsafe (there are conflicts among its generators) and thus no further extension can be safe.

- \perp is trivially fixed: $j_S(\perp) = \perp$.

Notice:

- Each generator U_w represents a part of a process's history.
- The operator j_S identifies the largest safe fusion containing U_w , i.e., the maximal extension of the part where processes play well together.
- If no safe extensions exist (as in U_b), then $j_S(U_b)$ doesn't get bigger, indicating that safety cannot be guaranteed any further beyond this part.
- Hence, j_S captures a mereological notion of integrity, showing which combinations of parts form consistent wholes and which do not.

TODOs:

- Add example: A statue and the lump of clay?

5. Classical Mereological Notions in the Sheaf-theoretic Setting

In this section, we provide a discussion of what classical notions of mereology look like in the sheaf-theoretic setting.

- *Cambridge fusions.* Sheaves handle Cambridge fusions correctly.
- *Mere collections.* The collection of all dogs. Is that a "whole"? Well, we could build a sheaf whose atomic regions are filled with dogs, none of which glue. Then we have a collection of dogs, but no glued object. That matches exactly the intuition: yes, we have a "collection" (we built a sheaf for it, after all), but the internals of that sheaf reveal that it's *merely* a collection, i.e., that its parts are not glued.
- *Co-habiting fusions.* Sheaves allow multiple fusions to occupy the same locale, without being glued. For instance, in the sheaf of real-valued functions over real number line, there are many functions that glue together, and occupy the same locale.
- *Non-boolean algebra.* The parts space is Heyting, not Boolean. We're not saddled with such a strong complement operation. You can pick a locale that is Boolean if you need it, but this framework doesn't require it. In fact, the positive logic of a locale is "geometric logic."
- *Reflexivity, antisymmetry, and transitivity.* These are guaranteed. Locally, of course, you may not have transitivity. But globally, it's a theorem. [Check that.]
- *Distributivity.*

do the glued sections of a sheaf have to be distributive? Only inside what glues (since we glue pairwise, so every $i \vee j$ of the cover.

- *An empty element.* There is a need for a bottom element in the *algebra* of parts, but a sheaf need not contain any such thing. There is no need here to try and construct awkward mathematical structures that do algebra on parts but yet don't have a bottom element because our ontological intuitions tell us there can be no such thing. That confuses two issues: algebra and integrity. So here we separate those cleanly, and the algebra can do algebra while the sheaf can do integrity. [In a sheaf you CAN'T assign an empty element to bottom, for coherence, so the bottom element is special...need to say more about that and figure it out.]
- *Supplementation principles.* Sheaves don't constrain one way or another. [Is that really true? Maybe it's better to say that it doesn't force any supplementation principles, which might provide a reason to call into question whether supplementation is another one of those ideas that is about integrity of parts but has been confused with the algebra of parts.]
- *Ordering of parts.* Consider that "pit" and "tip" have the same parts but are different words. These differences can be handled by different sheaves over a 3-stage

prefix-ordered locale as in the example of concurrent processes. Note that we retain extensionality.

- *Extensionality*. Classical mereology's notion of extensionality essentially flattens any structure and is thus overly aggressive. This is why extensionality is so controversial. The sheaf-theoretic perspective retains extensionality, but is much more nuanced. [Here too, I suspect that mereological discussions of extensionality have confused the algebra of parts and the integrity of wholes.]
- *Gunk and atoms*. You can model continuity and gunky parts if you so desire. You just need a sober space to do it.

check that we can model continuity in the locale in this way.

can you do continuity only in the sheaf data, without an underlying continuous decomposition in the locale? I would think that if you can't infinitely decompose into smaller opens around a point in the locale, you couldn't do such a thing in the sheaf data?

- *Priority of wholes*. The framework is agnostic as to whether you take an Aristotelian-Thomistic approach

cite Aquinas, Arlig, and that guy who wrote that recent book defending the Aristotelian view

- *The whole is greater than its parts*. The framework is agnostic as to whether you want to be a Scotist and say that the whole is something over and above its parts (cite Cross) or an Ockhamist who says it is not

cite Normore, Arlig

6. Classical Mereological Notions in the Sheaf-theoretic Setting

In this section, we provide a discussion of what classical notions of mereology look like in the sheaf-theoretic setting.

- *Cambridge fusions*. Sheaves handle Cambridge fusions correctly.
- *Mere collections*. The collection of all dogs. Is that a "whole"? Well, we could build a sheaf whose atomic regions are filled with dogs, none of which glue. Then we have a collection of dogs, but no glued object. That matches exactly the intuition: yes, we have a "collection" (we built a sheaf for it, after all), but the internals of that sheaf reveal that it's *merely* a collection, i.e., that its parts are not glued.
- *Co-habiting fusions*. Sheaves allow multiple fusions to occupy the same locale, without being glued. For instance, in the sheaf of real-valued functions over real number line, there are many functions that glue together, and occupy the same locale.
- *Non-boolean algebra*. The parts space is Heyting, not Boolean. We're not saddled with such a strong complement operation. You can pick a locale that is Boolean if you need it, but this framework doesn't require it. In fact, the positive logic of a locale is "geometric logic."
- *Reflexivity, antisymmetry, and transitivity*. These are guaranteed. Locally, of course, you may not have transitivity. But globally, it's a theorem. [Check that.]
- *Distributivity*.

do the glued sections of a sheaf have to be distributive? Only inside what glues (since we glue pairwise, so every $i \vee j$ of the cover.

- *An empty element.* There is a need for a bottom element in the *algebra* of parts, but a sheaf need not contain any such thing. There is no need here to try and construct awkward mathematical structures that do algebra on parts but yet don't have a bottom element because our ontological intuitions tell us there can be no such thing. That confuses two issues: algebra and integrity. So here we separate those cleanly, and the algebra can do algebra while the sheaf can do integrity. [In a sheaf you CAN'T assign an empty element to bottom, for coherence, so the bottom element is special...need to say more about that and figure it out.]
- *Supplementation principles.* Sheaves don't constrain one way or another. [Is that really true? Maybe it's better to say that it doesn't force any supplementation principles, which might provide a reason to call into question whether supplementation is another one of those ideas that is about integrity of parts but has been confused with the algebra of parts.]
- *Ordering of parts.* Consider that "pit" and "tip" have the same parts but are different words. These differences can be handled by different sheaves over a 3-stage prefix-ordered locale as in the example of concurrent processes. Note that we retain extensionality.
- *Extensionality.* Classical mereology's notion of extensionality essentially flattens any structure and is thus overly aggressive. This is why extensionality is so controversial. The sheaf-theoretic perspective retains extensionality, but is much more nuanced. [Here too, I suspect that mereological discussions of extensionality have confused the algebra of parts and the integrity of wholes.]
- *Gunk and atoms.* You can model continuity and gunky parts if you so desire. You just need a sober space to do it.

check that we can model continuity in the locale in this way.

can you do continuity only in the sheaf data, without an underlying continuous decomposition in the locale? I would think that if you can't infinitely decompose into smaller opens around a point in the locale, you couldn't do such a thing in the sheaf data?
- *Priority of wholes.* The framework is agnostic as to whether you take an Aristotelian-Thomistic approach

cite Aquinas, Arlig, and that guy who wrote that recent book defending the Aristotelian view
- *The whole is greater than its parts.* The framework is agnostic as to whether you want to be a Scotist and say that the whole is something over and above its parts (cite Cross) or an Ockhamist who says it is not

cite Normore, Arlig

References

1. Simons, P. *Parts: A Study in Ontology*; Clarendon Press: Oxford, UK, 1987.
2. Varzi, A. Mereology. In *The Stanford Encyclopedia of Philosophy*; Zalta, E., Ed.; Stanford University: Stanford, CA, 2011.
3. Cotnoir, A.; Varzi, A. *Mereology*; Oxford University Press: Oxford, UK, 2021.
4. Lewis, D. *Parts of Classes*; Basil Blackwell: Oxford, UK, 1991.
5. Leonard, H.; Goodman, N. The Calculus of Individuals and Its Uses. *The Journal of Symbolic Logic* **1940**, *5*, 45–55.
6. Goodman, N. *The Structure of Appearance*, 3rd ed.; D. Reidel Publishing Company: Dordrecht, 1977.
7. Tarski, A. Les fondements de la géométrie des corps. In *Alfred Tarski: Collected Papers, Volume 1: 1921-1934*; Givant, S.; McKenzie, R., Eds.; Birkhäuser: Basel, 1986; pp. 225–232.

8. Tarski, A. Foundations of the Geometry of Solids. In *Logic, Semantics, Metamathematics*; Woodger, J.H., Ed.; Clarendon Press: Oxford, UK, 1956; pp. 24–29. 1290
9. Rescher, N. Axioms for the Part Relation. *Philosophical Studies* **1955**, *6*, 8–11. 1291
10. Eberle, R. *Nominalistic Systems*; D. Reidel Publishing Company: Dordrecht, 1970. 1292
11. Casati, R.; Varzi, A. *Parts and Places*; MIT Press: Cambridge, MA, 1999. 1293
12. Fong, B.; Myers, D.J.; Spivak, D. Behavioral Mereology: A Modal Logic for Passing Constraints. In Proceedings of the Proceedings of the 3rd Annual International Applied Category Theory Conference 2020 (ACT2020); Spivak, D.; Vicary, J., Eds., 2020. 1294
13. Schultz, P.; Spivak, D. *Temporal Type Theory: A Topos-Theoretic Approach to Systems and Behavior*; Birkhäuser, 2019. 1295
14. Tennison, B.R. *Sheaf Theory*; Cambridge University Press: Cambridge, UK, 1975. 1296
15. Mac Lane, S.; Moerdijk, I. *Sheaves in Geometry and Logic: A First Introduction to Topos Theory*; Springer: New York, 1994. 1297
16. Rosiak, D. *Sheaf Theory through Examples*; MIT Press: Cambridge, MA, 2022. 1298
17. Wedhorn, T. *Manifolds, Sheaves, and Cohomology*; Springer, 2016. 1299
18. Johnstone, P. *Stone Spaces*; Cambridge University Press: Cambridge, UK, 1982. 1300
19. Vickers, S. *Topology Via Logic*; Cambridge University Press: Cambridge, UK, 1989. 1301
20. Vickers, S. Locales and Toposes as Spaces. In *Handbook of Spatial Logics*; Aiello, M.; Pratt-Hartmann, I.; van Benthem, J., Eds.; Springer, 2007; pp. 429–496. 1302
21. Picado, J.; Pultr, A. *Frames and Locales: Topology without Points*; Birkhäuser, 2012. 1303
22. Goldblatt, R. *Topoi: The Categorical Analysis of Logic*, 2nd ed.; Elsevier: Amsterdam, 1984. 1304
23. McLarty, C. *Elementary Categories, Elementary Toposes*; Clarendon Press: Oxford, UK, 1992. 1305
24. Borceux, F. *Handbook of Categorical Algebra 3: Categories of Sheaves*; Cambridge University Press: Cambridge, UK, 1994. 1306
25. Lawvere, W.; Schanuel, S. *Conceptual Mathematics: A First Introduction to Categories*; Cambridge University Press: Cambridge, UK, 1997. 1307
26. Van Inwagen, P. *Material Beings*; Cornell University Press: Ithaca, NY, 1990. 1308

Disclaimer/Publisher’s Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content. 1313