

# A taxonomy of finite automata minimization algorithms

Bruce W. Watson  
Faculty of Mathematics and Computing Science  
Eindhoven University of Technology  
P.O. Box 513, 5600 MB Eindhoven  
The Netherlands  
e-mail: `watson@win.tue.nl`  
Tel: +31 40 474319

December 13, 1993

## Abstract

This paper presents a taxonomy of finite automata minimization algorithms. Brzozowski's elegant minimization algorithm differs from all other known minimization algorithms, and is derived separately. All of the remaining algorithms depend upon computing an equivalence relation on states. We define the equivalence relation, the partition that it induces, and its complement. Additionally, some useful properties are derived. It is shown that the equivalence relation is the greatest fixed point of an equation, providing a useful characterization of the required computation. We derive an upperbound on the number of approximation steps required to compute the fixed point. Algorithms computing the equivalence relation (or the partition, or its complement) are derived systematically in the same framework. The algorithms include Hopcroft's, several algorithms from text-books (including Hopcroft and Ullman's [HU79], Wood's [Wood87], and Aho, Sethi, and Ullman's [ASU86]), and several new algorithms or variants of existing algorithms.

## Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
<b>2</b>	<b>An algorithm due to Brzozowski</b>	<b>5</b>
<b>3</b>	<b>Minimization by equivalence of states</b>	<b>6</b>
3.1	Distinguishability . . . . .	7
3.2	An upperbound on the number of approximation steps . . . . .	8
3.3	Characterizing the equivalence classes of $E$ . . . . .	8
<b>4</b>	<b>Algorithms computing <math>E</math>, <math>D</math>, or <math>[Q]_E</math></b>	<b>9</b>
4.1	Computing $D$ and $E$ by layerwise approximations . . . . .	9
4.2	Computing $D$ , $E$ , and $[Q]_E$ by unordered approximation . . . . .	10
4.3	More efficiently computing $D$ and $E$ by unordered approximation . . . . .	10
4.4	An algorithm due to Hopcroft and Ullman . . . . .	11
4.5	Hopcroft's algorithm to compute $[Q]_E$ efficiently . . . . .	12
4.6	Computing $(p, q) \in E$ . . . . .	14
4.7	Computing $E$ by approximation from below . . . . .	16
<b>5</b>	<b>Conclusions</b>	<b>17</b>
<b>A</b>	<b>Some basic definitions</b>	<b>18</b>
<b>B</b>	<b>Finite automata</b>	<b>19</b>
B.1	Properties of finite automata . . . . .	19
B.2	Transformations on finite automata . . . . .	22
	<b>References</b>	<b>23</b>

# 1 Introduction

The minimization of deterministic finite automata is a problem that has been studied since the late 1950's. Simply stated, the problem is to find the unique (up to isomorphism) minimal deterministic finite automaton that accepts the same language as a given deterministic finite automaton. Algorithms solving this problem are used in applications ranging from compiler construction to hardware circuit minimization. With such a variety of applications, the number of differing presentations also grew: most text-books present their own variation, while the algorithm with the best running time (Hopcroft's) remains obscure and difficult to understand.

This report presents a taxonomy of finite automata minimization algorithms. The need for a taxonomy is illustrated by the following:

- Most text-book authors claim that their minimization algorithm is directly derived from those presented by Huffman [Huff54] and Moore [Moor56]. Unfortunately, most text-books present vastly differing algorithms (for example, compare [AU92], [ASU86], [HU79], and [Wood87]), and only the algorithms presented by Aho and Ullman and by Wood are directly derived from those originally presented in [Huff54, Moor56].
- While most of the algorithms rely on computing an equivalence relation on states, many of the explanations accompanying the algorithm presentations do not explicitly mention whether the algorithm computed the equivalence relation, the partition (of states) that it induces, or its complement.
- Comparison of the algorithms is further hindered by the vastly differing styles of presentation — sometimes as imperative programs, or as functional programs, but frequently only as a descriptive paragraph.

A related taxonomy of finite automata construction algorithms appears in [Wats93].

All except one of the algorithms rely on determining the set of automaton states which are equivalent<sup>1</sup>. The algorithm that does not make use of equivalent states is discussed in Section 2. In Section 3 the definition and some properties of equivalence of states is given. Algorithms that compute equivalent states are presented in Section 4. The main results of the taxonomy are summarized in the conclusions — Section 5. Appendices A and B give the basic definitions required for reading this paper. The definitions related to finite automata are taken from [Wats93]. The minimization algorithm relationships are shown in a “family tree” in Figure 1.

The principal computation in most minimization algorithms is the determination of equivalent (or inequivalent) states — thus yielding an equivalence relation on states. In this paper, we consider the following minimization algorithms:

- Brzozowski's (possibly nondeterministic) finite automaton minimization algorithm as presented in [Brzo62]. This elegant algorithm (Section 2) was originally invented by Brzozowski, and has since been re-invented without credit to Brzozowski. Given a (possibly nondeterministic) finite automaton without  $\epsilon$ -transitions, this algorithm produces the minimal deterministic finite automaton accepting the same language.
- Layerwise computation of equivalence as presented in [Wood87, Moor56, Brau88, Urba89]. This algorithm (Algorithm 4.2) is a straightforward implementation suggested by the approximation sequence arising from the fixed-point definition of equivalence of states.
- Unordered computation of equivalence. This algorithm (Algorithm 4.3, not appearing in the literature) computes the equivalence relation; pairs of states (for consideration of equivalence) are chosen in an arbitrary order.
- Unordered computation of equivalence classes as presented in [ASU86]. This algorithm (Algorithm 4.4) is a modification of the above algorithm computing equivalence of states.

---

<sup>1</sup> Equivalence of states is defined later.

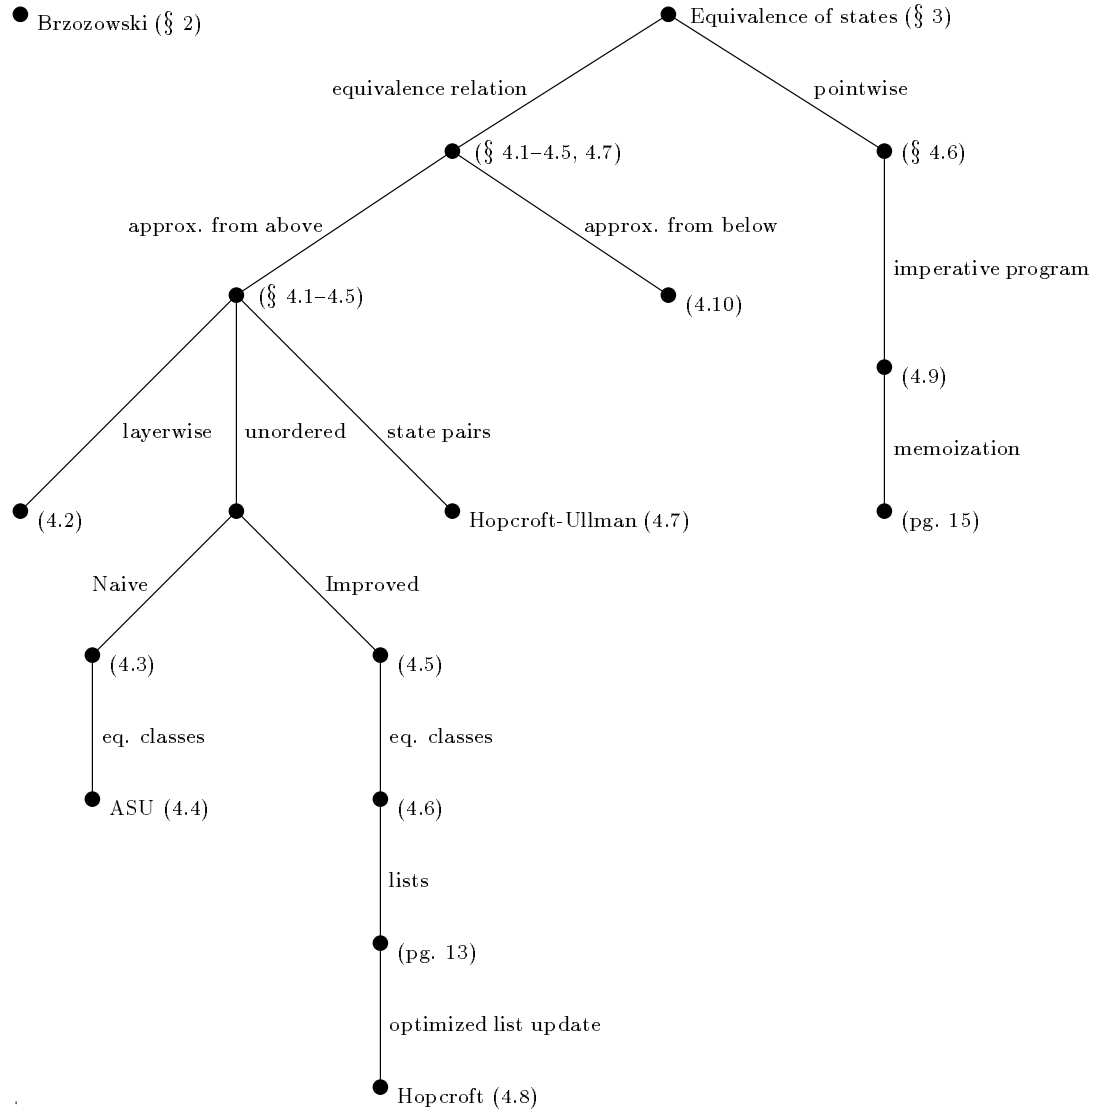


Figure 1: The family trees of finite automata minimization algorithms. Brzozowski's minimization algorithm is unrelated to the others, and appears as a separate (single vertex) tree. Each algorithm presented in this paper appears as a vertex in this tree. For each algorithm that appears explicitly in this paper, the construction number appears in parentheses (indicating where it appears in this paper). For algorithms that do not appear explicitly, a reference to the section or page number is given. Edges denote a refinement of the solution (and therefore explicit relationships between algorithms). They are labeled with the name of the refinement.

- Improved unordered computation of equivalence. This algorithm (Algorithm 4.5, not appearing in the literature) also computes the equivalence relation in an arbitrary order. The algorithm is a minor improvement over the other unordered algorithm.
- Improved unordered computation of equivalence classes. This algorithm (Algorithm 4.6, not appearing in the literature) is a modification of the above algorithm to compute the equivalence classes of states. This algorithm is used in the derivation of Hopcroft's minimization algorithm.
- Hopcroft and Ullman's algorithm as presented in [HU79]. This algorithm (Algorithm 4.7) computes the inequivalence (distinguishability) relation. Although it is based upon the algorithms of Huffman and Moore [Huff54, Moor56], this algorithm uses some interesting encoding techniques.
- Hopcroft's algorithm as presented in [Hopc71, Grie73]. This algorithm (Algorithm 4.8) is the best known algorithm (in terms of running time analysis) for minimization. As the original presentation by Hopcroft is difficult to understand, the presentation in this paper is based upon the one given by Gries.
- Pointwise computation of equivalence. This algorithm (Algorithm 4.9, not appearing in the literature) computes the equivalence of a given pair of states. It draws upon some non-automata related techniques, such as: structural equivalence of types and memoization of functional programs.
- Computation of equivalence from below (with respect to refinement). This algorithm (Algorithm 4.10, not appearing in the literature) computes the equivalence relation from below. Unlike any of the other known algorithms, the intermediate result of this algorithm can be used to construct a smaller (although not minimal) deterministic finite automaton.

## 2 An algorithm due to Brzowski

Most minimization algorithms are applied to a *DFA*. In the case of a nondeterministic *FA*, the subset construction is applied first, followed by the minimization algorithm. In this section, we consider the possibility of applying the subset construction (with useless state removal) after an (as yet unknown) algorithm to yield a minimal *DFA*. We now construct such an algorithm. (The algorithm described in this section can also be used to construct the minimal Complete DFA, by replacing function *subsetopt* with *subset*.)

Let  $M_0 = (Q_0, V, T_0, \emptyset, S_0, F_0)$  be the  $\epsilon$ -free *FA* to be minimized and  $M_2 = (Q_2, V, T_2, \emptyset, S_2, F_2)$  be the minimized *DFA* such that  $\mathcal{L}_{FA}(M_0) = \mathcal{L}_{FA}(M_2)$  (and of course  $\text{Min}(M_2)$  — see Definition B.19). (For the remainder of this section we make use of *Minimal* (Property B.21) as opposed to *Min*.) Since we apply the subset construction last, we have some intermediate finite automaton  $M_1 = (Q_1, V, T_1, \emptyset, S_1, F_1)$  such that  $M_2 = \text{useful}_s \circ \text{subsetopt}(M_1)$ . We require that  $M_1$  is somehow obtained from  $M_0$ , and that  $\mathcal{L}_{FA}(M_2) = \mathcal{L}_{FA}(M_1) = \mathcal{L}_{FA}(M_0)$ .

From the definition of *Minimal*( $M_2$ ) (Property B.21), we require **M2=子集构造(M1)**

$$(\forall p, q : p \in Q_2 \wedge q \in Q_2 \wedge p \neq q : \vec{\mathcal{L}}(p) \neq \vec{\mathcal{L}}(q)) \wedge \text{Useful}(M_2)$$

p,q右语言不相等, 就是q0,q1不可合并, 即可区分。  
因此, 最小的DFA是M中的所有q不可合并(可区分)并且所有状态均可达。

For all states  $q \in Q_2$  we have  $q \in \mathcal{P}(Q_1)$  since  $M_2 = \text{useful}_s \circ \text{subsetopt}(M_1)$ . Property B.25 of the subset construction gives

$$(\forall p : p \in Q_2 : \vec{\mathcal{L}}(p) = (\cup q : q \in Q_1 \wedge q \in p : \vec{\mathcal{L}}(q)))$$

子集构造: 由NFA到DFA的转换。

最坏情形, NFA有2的|Q|次方个子集(Q的幂集), 转换生成的DFA就有这么多状态。但是大部分状态不能从start state到达。

We need a sufficient condition on  $M_1$  to ensure *Minimal*( $M_2$ ). The following derivation gives such a condition:

$$\begin{aligned} & \text{Minimal}(M_2) \\ \equiv & \{ \text{Definition of Minimal (Property B.21)} \} \\ & (\forall p, q : p \in Q_2 \wedge q \in Q_2 \wedge p \neq q : \vec{\mathcal{L}}(p) \neq \vec{\mathcal{L}}(q)) \wedge \text{Useful}(M_2) \\ \Leftarrow & \{ \text{Property B.25; } M_2 = \text{useful}_s \circ \text{subsetopt}(M_1) \} \\ & (\forall p, q : p \in Q_1 \wedge q \in Q_1 \wedge p \neq q : \vec{\mathcal{L}}(p) \cap \vec{\mathcal{L}}(q) = \emptyset) \wedge \text{Useful}_f(M_1) \\ \equiv & \{ \text{Definition of Det' (Property B.18) and Useful}_s, \text{Useful}_f \text{ (Remark B.13)} \} \quad \text{M的左右语言相等} \\ & \text{Det}'(M_1^R) \wedge \text{Useful}_s(M_1^R) \\ \Leftarrow & \{ \text{Det}'(M) \Leftarrow \text{Det}(M) \} \\ & \text{Det}(M_1^R) \wedge \text{Useful}_s(M_1^R) \end{aligned}$$

The required condition on  $M_1$  can be established by (writing reversal as a prefix function)  $M_1 = R \circ \text{useful}_s \circ \text{subsetopt} \circ R(M_0)$ .

The complete minimization algorithm (for any  $\epsilon$ -free  $M_0 \in \text{FA}$ ) is

$$M_2 = \text{useful}_s \circ \text{subsetopt} \circ R \circ \text{useful}_s \circ \text{subsetopt} \circ R(M_0)$$

This algorithm was originally given by Brzowski in [Brzo62]. The origin of this algorithm was obscured when Jan van de Snepscheut presented the algorithm in his Ph.D thesis [vdSn85]. In this thesis, the algorithm is attributed to a private communication from Prof. Peremans of the Eindhoven University of Technology. Peremans had originally found the algorithm in an article by Mirkin [Mirk65]. Although Mirkin does cite a paper by Brzowski [Brzo64], it is not clear whether Mirkin's work was influenced by Brzowski's work on minimization. Jan van de Snepscheut's recent book [vdSn93] describes the algorithm, but provides neither a history nor citations (other than his thesis) for this algorithm.

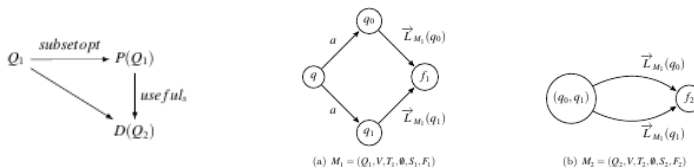


图 1.2:  $M_2 = \text{useful}_s \circ \text{subsetopt}(M_1)$





图 1.3:  $M_1 = R \circ \text{useful}_s \circ \text{subsetopt} \circ R(M_0)$

### 3 MINIMIZATION BY EQUIVALENCE OF STATES

A minimal automaton is the unique smallest complete deterministic automata

## 3 Minimization by equivalence of states

In this subsection, we restrict ourselves to considering minimization of *Complete DFA*'s. This is strictly a notational convenience, as the minimization algorithms can be modified to work for non-*Complete DFA*'s. A *Complete* minimized *DFA* will (in general) have one more state (a sink state) than a non-*Complete* minimized *DFA*, unless the language of the *DFA* is  $V^*$ . Let  $M = (Q, V, T, \emptyset, S, F)$  be a *Complete DFA*; this particular *DFA* will be used throughout this section. We also assume that all of the states of  $M$  are start-reachable, that is  $Useful_s(M)$ . Since  $M$  is deterministic and *Complete*, we will also take the transition relation to be total function  $T \in Q \times V \rightarrow Q$  instead of  $T \in Q \times V \rightarrow \mathcal{P}(Q)$ .

In order to minimize the *DFA*  $M$ , we compute an equivalence relation  $E \subseteq Q \times Q$  defined as:

$$(p, q) \in E \equiv (\vec{L}(p) = \vec{L}(q))$$

Since this is an equivalence relation, we are really interested in unordered pairs of states. It is notationally more convenient to use ordered pairs instead of unordered pairs.

The equivalent states are merged according to equivalence relation  $E$  with the *merge* transformation.

合并等价状态

**Transformation 3.1 (Merging states):** For any equivalence relation  $H$  such that  $H \subseteq E$ , the function *merge* can be used to reduce the number of states in the *DFA*<sup>2</sup>. Function *merge* is defined as:

$$\begin{aligned} merge((Q, V, T, \emptyset, \{s\}, F), H) &= \text{let } T' = \{([p]_H, a, [q]_H) : (p, a, q) \in T\} \\ &\quad \text{in } ([Q]_H, V, T', \emptyset, \{[s]_H\}, [F]_H) \\ &\quad \text{end} \end{aligned}$$

The definition of *merge* is independent of the choice of representatives of the equivalence classes. Function *merge* satisfies the property that

$$\mathcal{L}_{FA}(merge(M, H)) = \mathcal{L}_{FA}(M) \wedge |merge(M, H)| \leq |M| \wedge |merge(M, H)| = \#H$$

and it preserves *Complete*,  $\epsilon$ -free, *Useful*, *Det*, and *Minimal*; indeed, *merge* is only defined on  $\epsilon$ -free and deterministic *FA*'s.  $\square$

In order to compute relation  $E$ , we need a property of function  $\vec{L}$ .

**Property 3.2 (Function  $\vec{L}$ ):** Function  $\vec{L}$  satisfies

$$\vec{L}(p) = (\cup a : a \in V : \{a\} \cdot \vec{L}(T(p, a))) \cup (\text{if } (p \in F) \text{ then } \{\epsilon\} \text{ else } \emptyset \text{ fi})$$

$\square$

This allows us to give an alternate (but equivalent) characterization of equivalence of states.

**Definition 3.3 (Equivalence of states):** Equivalence relation  $E$  is the greatest (under refinement) fixed point of the equivalence


$$(p, q) \in E \equiv (p \in F \equiv q \in F) \wedge (\forall a : a \in V : (T(p, a), T(q, a)) \in E)$$

$\square$


**Remark 3.4:** The greatest fixed point has the least number of equivalence classes of any such fixed point.  $\square$

**Remark 3.5:** Any fixed point of the equivalence in Definition 3.3 can be used. In order to minimize the automaton, the greatest fixed point is desired.  $\square$

<sup>2</sup>When  $H$  is the identity relation on states, function *merge* will not reduce the number of states.



1.  $(a, b) \notin E$ , since  $T(a, 0) \in F$  but  $T(b, 0) \notin F$ .
2.  $(d, e) \notin E$ , since  $T(d, 0) \in F$  but  $T(e, 0) \notin F$ .
3.  $(a, c) \in E$ , since  $(a, c) \in E \equiv (a \in F \equiv c \in F) \wedge (\forall v \in V, (T(a, v), T(c, v)) \in E)$   
 $(a \notin F, c \notin F) \Rightarrow (a \in F \equiv c \in F)$   
 $T(a, 0) = T(c, 0) = \{d\} \Rightarrow (T(a, 0), T(c, 0)) \in E$   
 $T(a, 1) = T(c, 1) = \{c\} \Rightarrow (T(a, 1), T(c, 1)) \in E$



the greatest (under refinement) fixed point of the equivalence: 表示由等价关系生成的等价类, 再也不能进一步划分(加细), 等价类的个数( $E\#$ )达到上界。

最小化算法的前提条件:

(1) start-reachable, Useful(s) (2) Complete

必要时, 添加sink状态, 使其成为完全自动机。

算法完成后, 调用useful(), 删除sink。

但是,  $DFA::min\_Watson()$ 和 $DFA::min\_HopcroftUllman()$ 是逐个比较状态是否等价, 适于部分转移函数的自动机。

(迭代)逼近E:  
由E0开始,  
不断加细分,  
依次逼近,直至  
前后两次划分相同,  
E(K)=E(K+1).  
得到所有的等价类。

**Property 3.6 (Approximating E):** We can compute this greatest fixed point with successive approximations. The successive approximations of  $E$  are as follows (for  $k \geq 0$ ):


$$(p, q) \in E_{k+1} \equiv (p, q) \in E_k \wedge (\forall a : a \in V : (T(p, a), T(q, a)) \in E_k)$$

where  $E_0$  is defined by

$$(p, q) \in E_0 \equiv (p \in F \equiv q \in F)$$

An equivalent definition of  $E_0$  is  $E_0 = (Q \setminus F)^2 \cup F^2$ . We also have the property that  $E_{k+1} \subseteq E_k$  for all  $k \geq 0$ .  $\square$

$E_0 = ((Q \setminus F) \times (Q \setminus F)) \cup (F \times F)$   $E_0$ 将Q分成两个等价类, [F]和[Q\F]



**Remark 3.7:** If  $E_k$  is an equivalence relation, then so is  $E_{k+1}$ .  $E_0$  is an equivalence relation.  $\square$

**Remark 3.8:** An intuitive explanation of  $E_k$  is useful. A pair of states  $p, q$  are said to be  $k$ -equivalent (written  $(p, q) \in E_k$ ) if and only if there is no string  $w : |w| \leq k$  such that  $w \in \vec{\mathcal{L}}(p) \not\equiv w \in \vec{\mathcal{L}}(q)$ . As a consequence,  $p$  and  $q$  are  $k$ -equivalent if and only if

- they are both final or both non-final, and 二者必须同时是final或非final状态
- for all  $a \in V$ ,  $T(p, a)$  and  $T(q, a)$  are  $(k-1)$ -equivalent (by the definitions of  $\vec{\mathcal{L}}$  and  $T^*$ ).

$\square$

**Remark 3.9:** An important property of  $E$  is that it is also the greatest fixed point, under  $\subseteq$  (set containment instead of refinement), of the equivalence in Definition 3.3. As the greatest fixed point,  $E$  can be computed with a  $\subseteq$ -descending sequence of relations, starting with  $Q \times Q$ . Such a sequence need not consist only of equivalence relations. There may be more steps in such an approximating sequence than in the  $E_k$  sequence given above. Fortunately, each such step is usually easier to compute than computing  $E_{k+1}$  from  $E_k$ . Some algorithms that compute these cheaper (but longer) sequences are given in Sections 4.2–4.5 and 4.7.  $\square$

All previously known algorithms compute  $E$  by successive approximation from above (with respect to  $\subseteq$ ). A new algorithm in Section 4.7 computes  $E$  by successive approximation from below. In that section, the practical importance of this is explained.

### 3.1 Distinguishability 可区分性

It is also possible to compute  $E$  by first computing its complement  $D = \neg E$ . Relation  $D$  (called the distinguishability relation on states) is defined as:

$$(p, q) \in D \equiv (\vec{\mathcal{L}}(p) \neq \vec{\mathcal{L}}(q)) \quad \text{p和q是可区分状态, 即不可合并, D表示非等价状态对, 是等价关系的补集, 是可区分状态对的集合。}$$

**Definition 3.10 (Distinguishability of states):**  $D$  is the least (under  $\subseteq$ , set containment<sup>3</sup>) fixed point of an equation

$$(p, q) \in D \equiv (p \in F \not\equiv q \in F) \vee (\exists a : a \in V : (T(p, a), T(q, a)) \in D)$$

这里用集合包含(set containment), 而不使用加细分(refinement), 是因为D不必是一个等价关系。


$\square$

**Property 3.11 (Approximating D):** As with equivalence relation  $E$ , relation  $D$  can be computed by successive approximations (for  $k \geq 0$ )

$$(p, q) \in D_{k+1} \equiv (p, q) \in D_k \vee (\exists a : a \in V : (T(p, a), T(q, a)) \in D_k)$$

with  $D_0 = \neg E_0 = ((Q \setminus F) \times F) \cup (F \times (Q \setminus F))$ . For all  $k \geq 0$  we have  $D_k = \neg E_k$ . We also have the property that  $D_{k+1} \supseteq D_k$  for  $k \geq 0$ .  $\square$

<sup>3</sup>Here,  $\subseteq$  denotes normal set containment; refinement does not apply since  $D$  is not necessarily an equivalence relation.



由QxQ开始,  
它的包含:F和Q\F  
将Q分为两类==>E0  
在F(或Q\F)的包含中  
再进一步划分==>E1  
....

D0是F和Q\F  
形成的可区分状态对



**Remark 3.12:** As with  $E_k$ , an intuitive explanation of  $D_k$  is useful. A pair of states  $p, q$  are said to be  $k$ -distinguished (written  $(p, q) \in D_k$ ) if and only if there is a string  $w : |w| \leq k$  such that  $w \in \vec{\mathcal{L}}(p) \not\equiv w \in \vec{\mathcal{L}}(q)$ . As a consequence,  $p$  and  $q$  are  $k$ -distinguished (some authors say  $k$ -distinguishable) if and only if

- one is final and the other is non-final, or 一个是final, 一个是非final
- there exists  $a \in V$  such that  $T(p, a)$  and  $T(q, a)$  are  $(k-1)$ -distinguished.

□

求等价关系的  
计算步数上界

### 3.2 An upperbound on the number of approximation steps

We can easily place an upperbound on the number of steps in the computation of  $E$ .

Let  $E_j$  be the greatest fixed point of the equation defining  $E$ . We have the sequence of approximations (where  $I_Q$  is the identity relation on states):

$$E_0 \supset E_1 \supset \cdots \supset E_j \supseteq I_Q$$

$I_Q$ : 每个状态都构成唯一关系,  $\#I_Q = |Q|$

The indices of some of the equivalence relations in the approximation sequence are known:  $\#I_Q = |Q|$  and  $\#E_0 \leq 2$ . We can deduce that:

$$\#E_0 < \#E_1 < \cdots < \#E_j \leq \#I_Q = |Q|$$

$\#E_0 = 0$  表示没有等价关系, 自然0就是等价指数(等价类的个数)的上界。

$\#E_0 = 1$  表示只有一个等价类, 因此Q要么全部是final, 要么全部是非final, 上界是1

$\#E_0 = 2$ , 表示两个等价关系, 其一是final, 另一个是非final

In the case that  $\#E_0 = 0$ , we have that  $E_0$  is the greatest fixed point. In the case that  $\#E_1 = 1$ , either all states are final states, or all states are non-final ones; in both cases  $E_0$  is the greatest fixed point. In the case that  $\#E_0 = 2$ , we have  $i+2 \leq \#E_i$ . Since  $j+2 \leq \#E_j \leq \#I_Q = |Q|$  we get  $j \leq |Q|-2$ . This gives an upperbound of  $(|Q|-2) \max 0$  steps for the computation (starting at  $E_0$ ) of the greatest fixed point  $E_j$  (using the approximating sequence given in Property 3.6).

$|Q|-2 > 0$  时,  $\max = |Q|-2$ , 否则,  $\max = 0$

A consequence of this upperbound is that  $E = E_{(|Q|-2) \max 0}$ . As we shall see later, this can lead to some efficiency improvements to algorithms computing  $E$ . This result is also noted by Wood [Wood87, Lemma 2.4.1]. This upperbound also holds for computing  $D$  and  $[Q]_E$  by approximation.

### 3.3 Characterizing the equivalence classes of $E$

由等价关系E生成所有等价类

It is also practical to compute  $[Q]_E$ : the set of equivalence classes of  $E$ . In order to characterize partition  $[Q]_E$ , we begin our derivation with Definition 3.3, the characterization of  $E$  as the largest equivalence relation (under  $\subseteq$ ) such that

$$\begin{aligned} & (\forall p, q : (p, q) \in E : (p \in F \equiv q \in F) \wedge (\forall a : a \in V : (T(p, a), T(q, a)) \in E)) \\ \equiv & \quad \{ \text{Definition of membership in } E; \text{ move } a \text{ to outer quantification} \} \\ & (\forall p, q, a : (p, q) \in E \wedge a \in V : (p \in F \equiv q \in F) \wedge [T(p, a)]_E = [T(q, a)]_E) \\ \equiv & \quad \{ \text{Introduce equivalence classes } Q_0, Q_1 \text{ explicitly} \} \\ & (\forall Q_0, Q_1, a : Q_0 \in [Q]_E \wedge Q_1 \in [Q]_E \wedge a \in V : \\ & \quad (\forall p, q : p \in Q_0 \wedge q \in Q_0 : (p \in F \equiv q \in F) \wedge T(p, a) \in Q_1 \equiv T(q, a) \in Q_1)) \end{aligned}$$

**Definition 3.13 (Function *Splittable*):** In order to make this quantification more concise, we define

$$Splittable(Q_0, Q_1, a) \equiv (\exists p, q : p \in Q_0 \wedge q \in Q_0 : (T(p, a) \in Q_1 \not\equiv T(q, a) \in Q_1))$$

(p,q)的out->状态是否可区分

□

Using *Splittable*,  $[Q]_E$  is the largest partition (under  $\sqsubseteq$ ) such that  $[Q]_E \sqsubseteq [Q]_{E_0}$  and  $[Q]_E$  is  $[Q]_{E_0}$ 的加细划分

$$(\forall Q_0, Q_1, a : Q_0 \in [Q]_E \wedge Q_1 \in [Q]_E \wedge a \in V : \neg Splittable(Q_0, Q_1, a))$$




递归分割, 直到不可细分为止。

This characterization will be used in the computation of  $[Q]_E$ .

initial partition,  $P = [Q]_{E_0} = \{F, Q \setminus F\}$ ,  $Q_0, Q_1 \in P$ ,  
if  $(\exists p, q \in Q_0, T(p, a) \in Q_1, \text{ and } T(q, a) \notin Q_1)$ , then  
split  $Q_0$  wrt  $(Q_1, a)$  into two parts, (1):  $Q_0', T(p, a) \in Q_1$  and (2):  $(Q_0 \setminus Q_0'), T(p, a) \notin Q_1$



the largest partition: 表示等价类再也不能进一步划分(加细), 等价类的个数(E#)达到上界。

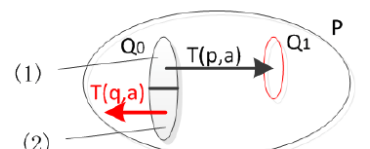

a:  $((T(p, a), T(q, a)) \in E_0$ ; b:  $((T(p, a), T(q, a)) \notin E_0$ ; c:  $((T(p, a), T(q, a)) \in E_1(\text{part}))$ ; d:  $((T(p, a), T(q, a)) \notin E_1(\text{part}))$ ;

## 4 Algorithms computing $E$ , $D$ , or $[Q]_E$

$$(p, q) \in D \equiv (\overline{\mathcal{L}}(p) \neq \overline{\mathcal{L}}(q))$$

In this section, we consider several algorithms that compute  $D$ ,  $E$ , or  $[Q]_E$ . Some of the algorithms are presented in general terms: computing  $D$  and  $E$ . Since only one of  $D$  or  $E$  is needed (and not both), such a general algorithm would be modified for practical use to compute only one of the two.

D和E不用同时计算，  
计算出一个，另外一个  
就是他的补。

### 4.1 Computing $D$ and $E$ by layerwise approximations 分层逼近计算D和E

The definition of  $E_{k+1}$  in terms of  $E_k$  (and likewise for  $D$ ) leads naturally to the following algorithm computing  $D$  and  $E$  (where variable  $k$  is a ghost variable, used only for specifying the invariant)

**Algorithm 4.1:**

---

```

 $G, H := D_0, E_0;$ 
 $G_{old}, H_{old}, k := \emptyset, Q \times Q, 0;$ 
{invariant:  $G = D_k \wedge H = E_k$ } 每次迭代的不变式：当D(或E)集合前后两次迭代不再变化，意味着计算结束。
do  $G \neq G_{old} \longrightarrow$ 
    { $G \neq G_{old} \wedge H \neq H_{old}$ }
     $G_{old}, H_{old} := G, H;$ 
     $G := (\cup p, q : (p, q) \in G_{old} \vee (\exists a : a \in V : (T(p, a), T(q, a)) \in G_{old}) : \{(p, q)\});$  注意“或”，“与”关系
     $H := (\cup p, q : (p, q) \in H_{old} \wedge (\forall a : a \in V : (T(p, a), T(q, a)) \in H_{old}) : \{(p, q)\});$ 
    { $G = \neg H$ } G和H是互补关系，G=非H
     $k := k + 1$ 
od { $G = D \wedge H = E$ }

```

---

This algorithm is said to compute  $D$  and  $E$  layerwise, since it computes the sequences  $D_k$  and  $E_k$ . The update of  $G$  and  $H$  in the repetition can be made with another repetition as shown in the program now following.

**Algorithm 4.2 (Layerwise computation of  $D$  and  $E$ ):**

---

```

 $G, H := D_0, E_0;$ 
 $G_{old}, H_{old}, k := \emptyset, Q \times Q, 0;$ 
{invariant:  $G = D_k \wedge H = E_k$ }
do  $G \neq G_{old} \longrightarrow$ 
    { $G \neq G_{old} \wedge H \neq H_{old}$ }
     $G_{old}, H_{old} := G, H;$ 
    for  $(p, q) : (p, q) \in H_{old}$  do
        if  $(\exists a : a \in V : (T(p, a), T(q, a)) \in G_{old}) \longrightarrow G, H := G \cup \{(p, q)\}, H \setminus \{(p, q)\}$  可区分的（状态对）从H中剔除
        ||  $(\forall a : a \in V : (T(p, a), T(q, a)) \in H_{old}) \longrightarrow$  skip
        fi
    rof;
    { $G = \neg H$ }
     $k := k + 1$ 
od { $G = D \wedge H = E$ }

```

---

The algorithm can be split into two: one computing only  $D$ , and the other computing only  $E$ . The algorithm computing only  $E$  is essentially the algorithm presented by Wood in [Wood87, pg. 132]. According to Wood, it is based on the work of Moore [Moor56]. Its running times is  $\mathcal{O}(|Q|^3)$ . Brauer uses some encoding techniques to provide an  $\mathcal{O}(|Q|^2)$  version of this algorithm in [Brau88], while Urbanek improves upon the space requirements of Brauer's version in [Urba89]. None of these variants is given here. The algorithm computing only  $D$  does not appear in the literature.

With a little effort this algorithm can be modified to compute  $[Q]_E$ .

## 4.2 Computing $D$ , $E$ , and $[Q]_E$ by unordered approximation

Instead of computing each  $E_k$  (computing  $E$  layerwise), we can compute  $E$  by considering pairs of states in an arbitrary order (as outlined in Remark 3.9). This is done in the following algorithm (which also computes  $D$ ):

**Algorithm 4.3:**

---

```

 $G, H := D_0, E_0;$ 
{invariant:  $G = \neg H \wedge G \subseteq D$ } 表示每次迭代的不变式:  $G = \neg H$ , 并且  $G$  是  $D$  的子集
do ( $\exists p, q, a : a \in V \wedge (p, q) \in H : (T(p, a), T(q, a)) \in G$ )  $\longrightarrow$ 
    let  $p, q : (p, q) \in H \wedge (\exists a : a \in V : (T(p, a), T(q, a)) \in G);$ 
    { $(p, q) \in D$ }
     $G, H := G \cup \{(p, q)\}, H \setminus \{(p, q)\}$ 
od { $G = D \wedge H = E$ }

```

---

This algorithm can be split into one computing only  $D$ , and one computing only  $E$ . At the end of each iteration step, it may be that  $H$  is not an equivalence relation (that is,  $H \neq H^*$ ) — see Remark 3.9. A slight modification to this algorithm can be made by adding the following assignment before the **od**:

$$H := (\mathbf{MAX}_{\subseteq} J : J \subseteq H \wedge J = J^* : J); G := \neg H$$

|Q|-2>0时, max=|Q|-2,  
否则, max=0, 见P8.3.2

Addition of this assignment makes the algorithm compute the refinement sequence  $E_k$  (see Remark 3.9). This assignment may improve the running time of the algorithm if a cheap method of computing the quantified **MAX** is used. This algorithm does not appear in the literature.

When we convert the above algorithm to compute  $[Q]_E$ , the resulting algorithm is the following one, given by Aho, Sethi, and Ullman in [ASU86, Alg. 3.6]:

// Attempt to split the eq. class [p] w.r.t. ([q], a) in P // [p] is split into two parts: [new p] and [r]. T([new p], a) 属于 [q], T([r], a) 不属于 [q]. 注意

**Algorithm 4.4:** [new p] 的代表元还是 [p]. // 如果不能分离, 返回 Invalid.

State DFA::split( const State p, const State q, const CharRange a, StateEqRel & P )

---


```

 $P := [Q]_{E_0};$ 
{invariant:  $[Q]_E \subseteq P \subseteq [Q]_{E_0}$ }
do ( $\exists Q_0, Q_1, a : Q_0 \in P \wedge Q_1 \in P \wedge a \in V : \text{Splittable}(Q_0, Q_1, a)$ )  $\longrightarrow$ 
    let  $Q_0, Q_1, a : \text{Splittable}(Q_0, Q_1, a);$ 
     $Q'_0 := \{p : p \in Q_0 \wedge T(p, a) \in Q_1\};$ 
    { $\neg \text{Splittable}(Q_0 \setminus Q'_0, Q_1, a) \wedge \neg \text{Splittable}(Q'_0, Q_1, a)$ } 递归分割, 直到不可细分为止.
     $P := P \setminus \{Q_0\} \cup \{Q_0 \setminus Q'_0, Q'_0\}$  原  $Q_0$  被替换为 (1) 和 (2)
od
{ $(\forall Q_0, Q_1, a : Q_0 \in P \wedge Q_1 \in P \wedge a \in V : \neg \text{Splittable}(Q_0, Q_1, a))$ }
{ $P = [Q]_E$ }

```

---

initial partition,  $P = [Q]_{E_0} = \{F, Q, F\}$ ,  $Q_0, Q_1 \in P$ ,  
if  $(\exists p, q \in Q_0, T(p, a) \in Q_1, \text{ and } T(q, a) \notin Q_1)$ , then  
split  $Q_0$  wrt  $(Q_1, a)$  into two parts, (1):  $Q'_0, T(p, a) \in Q_1$  and (2):  $(Q_0 \setminus Q'_0), T(p, a) \notin Q_1$ .



This algorithm has running time  $\mathcal{O}(|Q|^2)$ .

## 4.3 More efficiently computing $D$ and $E$ by unordered approximation

We present another algorithm that considers pairs of states in an arbitrary order. This algorithm (which also computes  $D$ ) consists of two nested repetitions:

**Algorithm 4.5:**


---

```

 $G, H := D_0, E_0;$ 
{invariant:  $G = \neg H \wedge G \subseteq D$ }
do  $(\exists p, q, a : a \in V \wedge (p, q) \in H : (T(p, a), T(q, a)) \in G) \longrightarrow$ 
  let  $p, a : p \in Q \wedge a \in V \wedge (\exists q : (p, q) \in H : (T(p, a), T(q, a)) \in G);$ 
  for  $q : (p, q) \in H \wedge (T(p, a), T(q, a)) \in G$  do
     $G, H := G \cup \{(p, q)\}, H \setminus \{(p, q)\}$ 
  rof
od  $\{G = D \wedge H = E\}$ 

```

---

As with Algorithm 4.3, at the end of each outer iteration step, it may be that  $H \neq H^*$ . This can be solved with an assignment to  $H$  as can be done in Algorithm 4.3. This algorithm does not appear in the literature. It can also be modified to compute only  $D$  or only  $E$ .

Modifying the above algorithm to compute  $[Q]_E$  is particularly interesting; the modified algorithm will be used in Section 4.5 to derive an algorithm (by Hopcroft) which is the best known algorithm for  $FA$  minimization. The algorithm is (where variable  $P_{old}$  is used only for the invariant):

**Algorithm 4.6:**


---


```

 $P := [Q]_{E_0};$ 
{invariant:  $[Q]_E \subseteq P \subseteq [Q]_{E_0}$ }
do  $(\exists Q_1, a : Q_1 \in P \wedge a \in V : (\exists Q_0 : Q_0 \in P : Splittable(Q_0, Q_1, a))) \longrightarrow$ 
  let  $Q_1, a : (\exists Q_0 : Q_0 \in P : Splittable(Q_0, Q_1, a));$ 
   $P_{old} := P;$ 
  {invariant:  $[Q]_E \subseteq P \subseteq P_{old}$ }
  for  $Q_0 : Q_0 \in P_{old} \wedge Splittable(Q_0, Q_1, a)$  do
     $Q'_0 := \{p : p \in Q_0 \wedge T(p, a) \in Q_1\};$ 
     $P := P \setminus \{Q_0\} \cup \{Q_0 \setminus Q'_0, Q'_0\}$ 
  rof
   $(\forall Q_0 : Q_0 \in P : \neg Splittable(Q_0, Q_1, a))$ 
od
 $\{(\forall Q_1, a : Q_1 \in P \wedge a \in V : (\forall Q_0 : Q_0 \in P : \neg Splittable(Q_0, Q_1, a)))\}$ 
 $\{P = [Q]_E\}$ 

```

---

initial partition,  $P = [Q]_{E_0} = \{F, Q \setminus F\}$ ,  $Q_0, Q_1 \in P$ ,  
 if  $(\exists p, q \in Q_0, T(p, a) \in Q_1, \text{ and } T(q, a) \notin Q_1)$ , then  
 split  $Q_0$  wrt  $(Q_1, a)$  into two parts, (1):  $Q'_0, T(p, a) \in Q_1$  and (2):  $(Q_0 \setminus Q'_0), T(p, a) \notin Q_1$

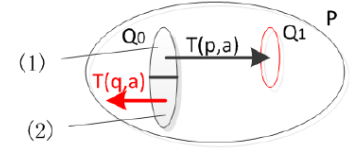

for: splits each equivalence class  
 $Q_0$  with respect to pair  $(Q_1, a)$

$Q_0$ 被替换为(1)和(2)

The inner repetition “splits” each eligible equivalence class  $Q_0$  with respect to pair  $(Q_1, a)$ . In actuality, some particular  $Q_0$  will not be split by  $(Q_1, a)$  if  $\neg Splittable(Q_0, Q_1, a)$ .

**4.4 An algorithm due to Hopcroft and Ullman**

From the definition of  $D$ , we see that a pair  $(p, q)$  is in  $D$  if and only if  $p \in F \neq q \in F$  or there is some  $a \in V$  such that  $(T(p, a), T(q, a)) \in D$ . This forms that basis of the algorithm considered in this subsection. With each pair of states  $(p, q)$  we associate a set of pairs of states  $L(p, q)$  such that

$$(r, s) \in L(p, q) \Rightarrow ((p, q) \in D \Rightarrow (r, s) \in D)$$

For each pair  $(p, q)$  (such that  $(p, q) \notin D_0$  —  $p$  and  $q$  are not already known to be distinguished) we do the following:

- If there is an  $a \in V$  such that we know that  $(T(p, a), T(q, a)) \in D$  then  $(p, q) \in D$ . We add  $(p, q)$  to our approximation of  $D$ , along with  $L(p, q)$ , and for each  $(r, s) \in L(p, q)$  add  $L(r, s)$ , and for each  $(t, u) \in L(r, s)$  add  $L(t, u)$ , etc.

- If there is no  $a \in V$  such that  $T((p, a), T(q, a)) \in D$  is known to be true, then for all  $b \in V$  we put  $(p, q)$  in the set  $L(T(p, b), T(q, b))$  since  $(T(p, b), T(q, b)) \in D \Rightarrow (p, q) \in D$ . If later it turns out that for some  $b \in V$ ,  $(T(p, b), T(q, b)) \in D$ , then we will also put  $L(T(p, b), T(q, b))$  (including  $(p, q)$ ) in  $D$ .

In our presentation of the algorithm, the invariants given are not sufficient to prove the correctness of the algorithm, but are used to illustrate the method in which the algorithm works. The algorithm is:

---

**Algorithm 4.7:**


---

```

for  $(p, q) : (p, q) \in (Q \times Q)$  do                                      $D_0 = \neg E_0 = ((Q \setminus F) \times F) \cup (F \times (Q \setminus F)).$ 
     $L(p, q) := \emptyset$ 
rof;
 $G := D_0$ ;      G: 可区分的(p,q)
{invariant:  $G \subseteq D \wedge (\forall p, q : (p, q) \notin D_0 : (\forall r, s : (r, s) \in L(p, q) : (p, q) \in D \Rightarrow (r, s) \in D))$  }
for  $(p, q) : (p, q) \notin D_0$  do 不知(p,q)是否可区分
    if  $(\exists a : a \in V : (T(p, a), T(q, a)) \in G) \longrightarrow$  如果 (T(p,a),T(q,a)) 可区分
         $A, B := \{(p, q)\}, \emptyset$ ;
        {invariant:  $A \subseteq D \wedge B \subseteq G \wedge A \cap B = \emptyset$ 
          $\wedge A \cup B = (\cup p, q : (p, q) \in B : L(p, q))$ }
        do  $A \neq \emptyset \longrightarrow$ 
            let  $(r, s) : (r, s) \in A$ ;
             $G := G \cup \{(r, s)\}$ ;
             $A, B := A \setminus \{(r, s)\}, B \cup \{(r, s)\}$ ;
             $A := A \cup (L(r, s) \setminus B)$ 
        od
     $\parallel (\forall a : a \in V : (T(p, a), T(q, a)) \notin G) \longrightarrow$ 
        for  $a \in V : T(p, a) \neq T(q, a)$  do
             $\{(T(p, a), T(q, a)) \in D \Rightarrow (p, q) \in D\}$ 
             $L(T(p, a), T(q, a)) := L(T(p, a), T(q, a)) \cup \{(p, q)\}$ 
        rof
    fi
rof $\{G = D\}$ 

```

---


This algorithm has running time  $\mathcal{O}(|Q|^2)$  and is given by Hopcroft and Ullman [HU79, Fig. 3.8]. In [HU79] it is attributed to Huffman [Huff54] and Moore [Moor56]. In their description, Hopcroft and Ullman describe  $L$  as mapping each pair of states to a list of pairs of states. The list data-type is not required here, and a set is used instead.

It is possible to modify the above algorithm to compute  $E$ . Such an algorithm does not appear in the literature.

#### 4.5 Hopcroft's algorithm to compute $[Q]_E$ efficiently

We now derive an efficient algorithm due to Hopcroft [Hopc71]. This algorithm has also been derived by Gries [Grie73]. This algorithm presently has the best known running time analysis of all *DFA* minimization algorithms.

We begin with Algorithm 4.6. Recall that the inner repetition “splits” each equivalence class  $Q_0$  with respect to pair  $(Q_1, a)$ . An observation (due to Hopcroft) is that once all equivalence classes have been split with respect to a particular  $(Q_1, a)$ , no equivalence classes need to be split with respect to the same  $(Q_1, a)$  on any subsequent iteration step of the outer repetition [Hopc71, pp. 190–191], [Grie73, Lemma 5]. We can use this fact to maintain a set  $L$  of such (equivalence class, alphabet symbol) pairs. We will then split the equivalence classes with respect to elements of  $L$ . In the original presentations of this algorithm [Hopc71, Grie73],  $L$  is a list. As this is not necessary, we retain  $L$ 's type as a set.

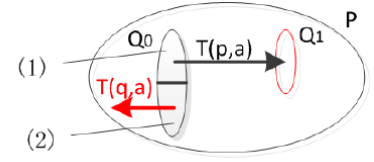


---

```

 $P := [Q]_{E_0};$ 
 $L := P \times V;$ 
{invariant:  $[Q]_E \subseteq P \subseteq [Q]_{E_0} \wedge L \subseteq (P \times V)$ 
 $\wedge L \supseteq \{(Q_1, a) : (Q_1, a) \in (P \times V) \wedge (\exists Q_0 : Q_0 \in P : Splittable(Q_0, Q_1, a))\}$ 
 $\wedge (\forall Q_0, Q_1, a : Q_0 \in Q \wedge (Q_1, a) \in L : \neg Splittable(Q_0, Q_1, a)) \Rightarrow (P = [Q]_E)$ 
do  $L \neq \emptyset \longrightarrow$ 
  let  $Q_1, a : (Q_1, a) \in L;$ 
   $P_{old} := P;$ 
   $L := L \setminus \{(Q_1, a)\};$ 
  {invariant:  $[Q]_E \subseteq P \subseteq P_{old}$ }
  for  $Q_0 : Q_0 \in P_{old} \wedge Splittable(Q_0, Q_1, a)$  do
     $Q'_0 := \{p : p \in Q_0 \wedge T(p, a) \in Q_1\};$ 
     $P := P \setminus \{Q_0\} \cup \{Q_0 \setminus Q'_0, Q'_0\};$  Q0被替换为(1)和(2)
    for  $b : b \in V$  do update L
      if  $(Q_0, b) \in L \longrightarrow L := L \setminus \{(Q_0, b)\} \cup \{(Q'_0, b), (Q_0 \setminus Q'_0, b)\}$  Q0被替换为(1)和(2)
      ||  $(Q_0, b) \notin L \longrightarrow L := L \cup \{(Q'_0, b), (Q_0 \setminus Q'_0, b)\}$ 
    fi
  rof
  rof
   $\{(\forall Q_0 : Q_0 \in P : \neg Splittable(Q_0, Q_1, a))\}$ 
od  $\{P = [Q]_E\}$ 


```

---

The innermost update of  $L$  is intentionally clumsy and will be used to arrive at the algorithm given by Hopcroft and Gries. In the update of set  $L$ , if  $(Q_0, b) \in L$  (for some  $b \in V$ ) and  $Q_0$  has been split into  $Q_0 \setminus Q'_0$  and  $Q'_0$  then  $(Q_0, b)$  is replaced (in  $L$ ) by  $(Q_0 \setminus Q'_0, b)$  and  $(Q'_0, b)$ .

Another observation due to Hopcroft is that splitting an equivalence class with respect to any two of  $(Q_0, b)$ ,  $(Q'_0, b)$ , and  $(Q_0 \setminus Q'_0, b)$  is the same as splitting the equivalence class with respect to all three [Hopc71, pp. 190–191], [Grie73, Lemma 6]. For efficiency reasons we therefore choose the smallest two of the three (comparing  $|Q_0|$ ,  $|Q'_0|$ , and  $|Q_0 \setminus Q'_0|$ ) in the update of set  $L$ . If  $(Q_0, b) \notin L$ , then splitting has already been done with respect to  $(Q_0, b)$  and we add either  $(Q'_0, b)$  or  $(Q_0 \setminus Q'_0, b)$  (whichever is smallest) to  $L$ . On the other hand, if  $(Q_0, b) \in L$ , then splitting has not yet been done and we remove  $(Q_0, b)$  from  $L$  and add  $(Q'_0, b)$  and  $(Q_0 \setminus Q'_0, b)$  instead.

Lastly, we observe that by starting with  $P = [Q]_{E_0} = \{Q \setminus F, F\}$  we have already split  $Q$ . As a result, we need only split with respect to either  $(Q \setminus F, b)$  or  $(F, b)$  (for all  $b \in V$ ) [Hopc71, pp. 190–191], [Grie73, Lemma 7].

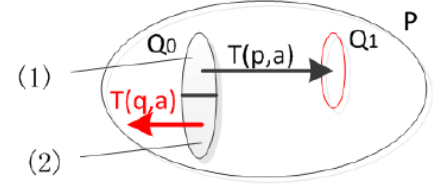

This gives the algorithm<sup>4</sup>:

**Algorithm 4.8 (Hopcroft):**

---

```

 $P := [Q]_{E_0}; \quad P = [Q]_{E_0} = \{Q \setminus F, F\}$ 
 $L := (\text{if } (|F| \leq |Q \setminus F|) \text{ then } \{F\} \text{ else } \{Q \setminus F\} \text{ fi}) \times V;$ 
{invariant:  $[Q]_E \subseteq P \subseteq [Q]_{E_0} \wedge L \subseteq (P \times V)$ 
 $\wedge (\forall Q_0, Q_1, a : Q_0 \in Q \wedge (Q_1, a) \in L : \neg \text{Splittable}(Q_0, Q_1, a)) \Rightarrow (P = [Q]_E)}$ 
do  $L \neq \emptyset \longrightarrow$ 
  let  $Q_1, a : (Q_1, a) \in L;$ 
   $P_{old} := P;$ 
   $L := L \setminus \{(Q_1, a)\};$ 
  {invariant:  $[Q]_E \subseteq P \subseteq P_{old}$ }
  for  $Q_0 : Q_0 \in P_{old} \wedge \text{Splittable}(Q_0, Q_1, a)$  do
     $Q'_0 := \{p : p \in Q_0 \wedge T(p, a) \in Q_1\};$ 
     $P := P \setminus \{Q_0\} \cup \{Q'_0, Q'_0\};$  Q0被替换为(1)和(2)
    for  $b : b \in V$  do update L
      if  $(Q_0, b) \in L \longrightarrow L := L \setminus \{(Q_0, b)\} \cup \{(Q'_0, b), (Q_0 \setminus Q'_0, b)\}$  Q0被替换为(1)和(2)
      ||  $(Q_0, b) \notin L \longrightarrow$ 
         $L := L \cup (\text{if } (|Q'_0| \leq |Q_0 \setminus Q'_0|) \text{ then } \{(Q'_0, b)\} \text{ else } \{(Q_0 \setminus Q'_0, b)\} \text{ fi})$  仅需add (1)或(2)
      fi
    rof
  rof
  { $(\forall Q_0 : Q_0 \in P : \neg \text{Splittable}(Q_0, Q_1, a))$ }
od  $\{P = [Q]_E\}$ 

```

---

Unfortunately, the running time analysis of this algorithm is complicated and is not discussed here. It is shown by both Hopcroft and Gries that it is  $\mathcal{O}(|Q| \log |Q|)$ , [Grie73, Hopc71].

## 4.6 Computing $(p, q) \in E$

From the problem of deciding the structural equivalence of two types, it is known that equivalence of two states can be computed recursively by turning the fixed point definition of  $E$  into a functional program. If the (unmodified) definition were to be used directly as a functional program, there is the possibility of non-termination. In order for the functional program to work, it takes a third parameter along with the two states.

The following program, similar to the one presented in [t-Ei91], computes relation  $E$  pointwise; an invocation  $equiv(p, q, \emptyset)$  determines whether states  $p$  and  $q$  are equivalent. It assumes that two states are equivalent (by placing the pair of states in  $S$ , the third parameter) until shown otherwise.

---

```

function  $equiv(p, q, S)$  is 状态p,q是等价的, 对所有的a,状态对(T(p,a),T(p,a))是相同状态, 要么同时是接受状态或同时是非接受状态
  if  $\{p, q\} \in S \longrightarrow eq := true$  态
  ||  $\{p, q\} \notin S \longrightarrow$ 
     $eq := (p \in F \equiv q \in F);$  p是接受状态当且仅当q是接受状态, 或者q是非接受状态时, p也是非接受状态。
     $eq := eq \wedge (\forall a : a \in V : equiv(T(p, a), T(q, a), S \cup \{\{p, q\}\}))$ 
  fi;
  return  $eq$ 

```

---

The  $\forall$  quantification can be implemented using a repetition

<sup>4</sup>Part of the invariant has been omitted, being rather complicated to derive.

---

```

function equiv( $p, q, S$ ) is
  if  $\{p, q\} \in S \longrightarrow eq := true$ 
  ||  $\{p, q\} \notin S \longrightarrow$ 
     $eq := (p \in F \equiv q \in F);$ 
  for  $a : a \in V$  do
     $eq := eq \wedge equiv(T(p, a), T(q, a), S \cup \{\{p, q\}\})$ 
  rof
fi;
return  $eq$ 

```

---

The correctness of this program is shown in [t-Ei91]. Naturally, the guard  $eq$  can be used in the repetition (to terminate the repetition when  $eq \equiv false$ ) in a practical implementation. This optimization is omitted here for clarity.

There are a number of methods for making this program more efficient. From Section 3.2 recall that  $E = E_{(|Q|-2) \mathbf{max} 0}$ . We add a parameter  $k$  to function *equiv* such that an invocation *equiv*( $p, q, \emptyset, k$ ) returns  $(p, q) \in E_k$  as its result. The recursion depth is bounded by  $(|Q|-2) \mathbf{max} 0$ . The new function is

---

```

function equiv( $p, q, S, k$ ) is
  if  $k = 0 \longrightarrow eq := (p \in F \equiv q \in F)$ 
  ||  $k \neq 0 \wedge \{p, q\} \in S \longrightarrow eq := true$ 
  ||  $k \neq 0 \wedge \{p, q\} \notin S \longrightarrow$ 
     $eq := (p \in F \equiv q \in F);$ 
  for  $a : a \in V$  do
     $eq := eq \wedge equiv(T(p, a), T(q, a), S \cup \{\{p, q\}\}, k - 1)$ 
  rof
fi;
return  $eq$ 

```

---

The third parameter  $S$  is made a global variable, improving the efficiency of this algorithm in practice. As a result, *equiv* is no longer a functional program in the sense that it now makes use of a global variable. The correctness of this transformation is shown in [t-Ei91]. We assume that  $S$  is initialized to  $\emptyset$ . When  $S = \emptyset$ , an invocation *equiv*( $p, q, (|Q|-2) \mathbf{max} 0$ ) returns  $(p, q) \in E$ ; after such an invocation  $S = \emptyset$ .

---

**Algorithm 4.9 (Pointwise computation of  $E$ ):** 逐项计算  $E$

---

```

function equiv( $p, q, k$ ) is
  if  $k = 0 \longrightarrow eq := (p \in F \equiv q \in F)$ 
  ||  $k \neq 0 \wedge \{p, q\} \in S \longrightarrow eq := true$ 
  ||  $k \neq 0 \wedge \{p, q\} \notin S \longrightarrow$ 
     $eq := (p \in F \equiv q \in F);$ 
     $S := S \cup \{\{p, q\}\};$ 
  for  $a : a \in V$  do
     $eq := eq \wedge equiv(T(p, a), T(q, a), k - 1)$ 
  rof;
   $S := S \setminus \{\{p, q\}\}$ 
fi;
return  $eq$ 

```

---

The procedure *equiv* can be memoized to further improve the running time in practice.

This algorithm does not appear in the literature.



### 4.7 Computing $E$ by approximation from below

This latest version of function *equiv* can be used to compute  $E$  and  $D$  (assuming  $I_Q$  is the identity relation on states, and  $S$  is the global variable used in Algorithm 4.9):

**Algorithm 4.10 (Computing  $E$  from below):**

---

```

 $S, G, H := \emptyset, \emptyset, I_Q;$ 
{invariant:  $(G \cup H) \subseteq (Q \times Q) \wedge G \subseteq D \wedge H \subseteq E$ }
do  $(G \cup H) \neq Q \times Q \longrightarrow$ 
  let  $p, q : (p, q) \in ((Q \times Q) \setminus (G \cup H));$ 
  if  $\text{equiv}(p, q, (|Q| - 2) \text{ max } 0) \longrightarrow H := H \cup \{(p, q)\}$ 
  ||  $\neg \text{equiv}(p, q, (|Q| - 2) \text{ max } 0) \longrightarrow G := G \cup \{(p, q)\}$ 
  fi
od  $\{G = D \wedge H = E\}$ 

```

---

Further efficiency improvements can be made as follows:

- We change the initialization of  $G$  to  $G := ((Q \setminus F) \times F) \cup (F \times (Q \setminus F))$ .
- We make use of the fact that  $E = E^*$ ; obviously  $E$  is symmetrical, halving the required amount of computation.  $H$  can be updated at each iteration step by  $H := H^*$  (provided the data-structures in the implementation are such that  $*$ -closure is easily implemented).
- Make use of the facts that

$$\begin{aligned}
 (p, q) \notin E &\Rightarrow (\forall r, s : r \in Q \wedge s \in Q \\
 &\quad \wedge (\exists w : w \in V^* : T^*(r, w) = p \wedge T^*(s, w) = q) : ((r, s) \notin E) \\
 (p, q) \in E &\Rightarrow (\forall w : w \in V^* : (T^*(p, w), T^*(q, w)) \in E)
 \end{aligned}$$

The first (respectively second) implication states that if  $p, q$  are two distinguished (respectively equivalent) states, and  $r, s$  are two states such that there is  $w \in V^*$  and  $T(r, w) = p \wedge T(s, w) = q$  (respectively  $T(p, w) = r \wedge T(q, w) = s$ ), then  $r, s$  are also distinguished (respectively equivalent).

This algorithm has worse running time than the  $\mathcal{O}(|Q| \log |Q|)$  of Hopcroft's algorithm [Hopc71, Grie73]. This algorithm has a significant advantage over all of the known algorithms: although function *equiv* computes  $E$  pointwise from above (with respect to  $\subseteq$ , refinement), the main program computes  $E$  from below (with respect to  $\subseteq$ , normal set inclusion<sup>5</sup>). As such, any intermediate result  $H$  in the computation of  $E$  is usable in (at least partially) reducing the size of an automaton; all of the other algorithms presented have unusable intermediate results. This property has use in reducing the size of automata when the running time of the minimization algorithm is restricted for some reason (for example, in real-time applications).

---

<sup>5</sup>This is set inclusion, as opposed to refinement, since the intermediate result  $H$  may not be an equivalence relation during the computation.

## 5 Conclusions

The conclusions about minimization algorithms are:

- A derivation of Brzozowski's minimization algorithm was presented. This derivation proved to be easier to understand than either the original derivation (by Brzozowski), or the derivation given by van de Snepscheut. A brief history of the minimization algorithm was presented, hopefully resolving some misattributions of its discovery.
- The definition of equivalence (relation  $E$ ) and distinguishability (relation  $D$ ) as fixed points of certain equations proved easier to understand than many text-book presentations.
- The fixed point characterization of  $E$  made it particularly easy to calculate an upperbound on the number of approximation steps required to compute  $E$  (or  $D$ ). This upperbound later proved useful in determining the running time of some of the algorithms, and also in making efficiency improvements to the pointwise algorithm.
- The definition of  $E$  as a greatest fixed point helped to identify the fact that all of the (previously) known algorithm computed  $E$  from above (with respect to refinement). As such, all of these algorithms have intermediate results that are not usable in minimizing the finite automaton.
- We successfully presented all of the well-known text-book algorithms in the same framework. Most of them were shown to be essentially the same, with minor differences in their loop structures. One exception was Hopcroft and Ullman's algorithm [HU79], which has a distinctly different loop structure. The presentation of that algorithm (with invariants) in this paper is arguably easier to understand than the original presentation. Our presentation highlights the fact that the main data-structure in the algorithm need not be a list — a set suffices.
- Hopcroft's minimization algorithm [Hopc71] was originally presented in a style that is not very understandable. As with Gries's paper [Grie73], we strive to derive this algorithm in a clear and precise manner. The presentation in this paper highlights two important facts: the beginning point for the derivation of this algorithm is one of the easily understood straightforward algorithms; and, the use of a list data-structure in both Hopcroft's and Gries's presentation of this algorithm is not necessary — a set can be used instead.
- This paper presented several new minimization algorithms, many of which were variations on the well-known algorithms. Two of the new algorithms (presented in Sections 4.6 and 4.7) are not derived from any of the well-known algorithms, and are significant in their own right.
  - An algorithm was presented that computes the relation  $E$  in a pointwise manner. This algorithm was refined from an algorithm used to determine the structural equivalence of types. Several techniques played important roles in the refinement:
    - \* the upperbound on the number of steps required to compute  $E$  was used to improve the algorithm by limiting the number of pairs of states that need to be considered in computing  $E$  pointwise;
    - \* memoization of the functional-program portion of the algorithm was used to reduce the amount of redundant computation.
  - A new algorithm was presented, that computes  $E$  from below. This algorithm makes use of the pointwise computation of  $E$  to construct and refine an approximation of  $E$ . Since the computation is from below, the intermediate results of this algorithm are usable in (at least partially) reducing the size of the  $DFA$ . This can be useful in applications where the amount of time available for minimization of the  $DFA$  is limited (as in real-time applications). In contrast, all of the (previously) known algorithms have unusable intermediate results.

## A Some basic definitions

**Convention A.1 (Powerset):** For any set  $A$  we use  $\mathcal{P}(A)$  to denote the set of all subsets of  $A$ .  $\mathcal{P}(A)$  is called the *powerset* of  $A$ ; it is sometimes written  $2^A$ .  $\square$

**Convention A.2 (Sets of functions):** For sets  $A$  and  $B$ ,  $A \longrightarrow B$  denotes the set of all total functions from  $A$  to  $B$ , while  $A \not\longrightarrow B$  denotes the set of all partial functions from  $A$  to  $B$ .  $\square$

**Remark A.3:** For sets  $A, B$  and relation  $C \subseteq A \times B$  we can interpret  $C$  as a function  $C \in A \longrightarrow \mathcal{P}(B)$ .  $\square$

**Convention A.4 (Tuple projection):** For an  $n$ -tuple  $t = (x_1, x_2, \dots, x_n)$  we use the notation  $\pi_i(t)$  ( $1 \leq i \leq n$ ) to denote tuple element  $x_i$ ; we use the notation  $\bar{\pi}_i(t)$  ( $1 \leq i \leq n$ ) to denote the  $(n-1)$ -tuple  $(x_1, \dots, x_{i-1}, x_{i+1}, \dots, x_n)$ . Both  $\pi$  and  $\bar{\pi}$  extend naturally to sets of tuples.  $\square$

**Convention A.5 (Relation composition):** Given sets  $A, B, C$  (not necessarily different) and two relations,  $E \subseteq A \times B$  and  $F \subseteq B \times C$ , we define relation composition (infix operator  $\circ$ ) as:

$$E \circ F = \{(a, c) : (\exists b : b \in B : (a, b) \in E \wedge (b, c) \in F)\}$$

$\square$

**Convention A.6 (Equivalence classes of an equivalence relation):** For any equivalence relation  $E$  on set  $A$  we denote the set of equivalence classes of  $E$  by  $[A]_E$ ; that is

$$[A]_E = \{[a]_E : a \in A\}$$

Set  $[A]_E$  is also called the *partition* of  $A$  induced by  $E$ .  $\square$

**Definition A.7 (Index of an equivalence class):** For equivalence relation  $E$  on set  $A$ , define  $\sharp E = |[A]_E|$ .  $\sharp E$  is called the *index* of  $E$ .  $\square$

**Definition A.8 (Alphabet):** An *alphabet* is a non-empty set of finite size.  $\square$

**Definition A.9 (Refinement of an equivalence relation):** For equivalence relations  $E$  and  $E'$  (on set  $A$ ),  $E$  is a *refinement* of  $E'$  if and only if  $E \subseteq E'$ .  $\square$  E'不必是等价类

**Definition A.10 (Refinement ( $\sqsubseteq$ ) relation on partitions):** For equivalence relations  $E$  and  $E'$  (on set  $A$ ),  $[A]_E$  is said to be a refinement of  $[A]_{E'}$  (written  $[A]_E \sqsubseteq [A]_{E'}$ ) if and only if  $E \subseteq E'$ . An equivalent statement is that  $[A]_E \sqsubseteq [A]_{E'}$  if and only if every equivalence class (of  $A$ ) under  $E$  is entirely contained in some equivalence class (of  $A$ ) under  $E'$ .  $\square$  E'是等价类

**Definition A.11 (Tuple and relation reversal):** For an  $n$ -tuple  $(x_1, x_2, \dots, x_n)$  define reversal as (postfix and superscript) function  $R$ :

$$(x_1, x_2, \dots, x_n)^R = (x_n, \dots, x_2, x_1)$$

Given a set  $A$  of tuples, we define  $A^R = \{x^R : x \in A\}$ .  $\square$

## B Finite automata

In this section we define finite automata, some of their properties, and some transformations on finite automata. Most of these definitions are taken directly from [Wats93].

**Definition B.1 (Finite automaton):** A finite automaton (an *FA*) is a 6-tuple  $(Q, V, T, E, S, F)$  where

- $Q$  is a finite set of states,
- $V$  is an alphabet,
- $T \in \mathcal{P}(Q \times V \times Q)$  is a transition relation,
- $E \in \mathcal{P}(Q \times Q)$  is an  $\epsilon$ -transition relation
- $S \subseteq Q$  is a set of start states, and
- $F \subseteq Q$  is a set of final states.

The definitions of an alphabet and function  $\mathcal{P}$  are in Definition A.8 and Convention A.1 respectively.  $\square$

**Remark B.2:** We will take some liberty in our interpretation of the signatures of the transition relations. For example, we also use the signatures  $T \in V \rightarrow \mathcal{P}(Q \times Q)$ ,  $T \in Q \times Q \rightarrow \mathcal{P}(V)$ ,  $T \in Q \times V \rightarrow \mathcal{P}(Q)$ ,  $T \in Q \rightarrow \mathcal{P}(V \times Q)$ , and  $E \in Q \rightarrow \mathcal{P}(Q)$ . In each case, the order of the  $Q$ 's from left to right will be preserved; for example, the function  $T \in Q \rightarrow \mathcal{P}(V \times Q)$  is defined as  $T(p) = \{(a, q) : (p, a, q) \in T\}$ . The signature that is used will be clear from the context. See Remark A.3. The definition of  $\rightarrow$  appears in Convention A.2.  $\square$

Since we only consider finite automata in this paper, we will frequently simply use the term *automata*.

### B.1 Properties of finite automata

In this subsection we define some properties of finite automata. To make these definitions more concise, we introduce particular finite automata  $M = (Q, V, T, E, S, F)$ ,  $M_0 = (Q_0, V_0, T_0, E_0, S_0, F_0)$ , and  $M_1 = (Q_1, V_1, T_1, E_1, S_1, F_1)$ .

**Definition B.3 (Size of an FA):** Define the size of an *FA* as  $|M| = |Q|$ .  $\square$

**Definition B.4 (Isomorphism ( $\cong$ ) of FA's):** We define isomorphism ( $\cong$ ) as an equivalence relation on *FA*'s.  $M_0$  and  $M_1$  are isomorphic (written  $M_0 \cong M_1$ ) if and only if  $V_0 = V_1$  and there exists a bijection  $g \in Q_0 \rightarrow Q_1$  such that

- $T_1 = \{(g(p), a, g(q)) : (p, a, q) \in T_0\}$ ,
- $E_1 = \{(g(p), g(q)) : (p, q) \in E_0\}$ ,
- $S_1 = \{g(s) : s \in S_0\}$ , and
- $F_1 = \{g(f) : f \in F_0\}$ .

$\square$

**Definition B.5 (Extending the transition relation  $T$ ):** We extend transition relation  $T \in V \rightarrow \mathcal{P}(Q \times Q)$  to  $T^* \in V^* \rightarrow \mathcal{P}(Q \times Q)$  as follows:

$$T^*(\epsilon) = E^*$$

and for  $(a \in V, w \in V^*)$

$$T^*(aw) = E^* \circ T(a) \circ T^*(w)$$

Operator  $\circ$  (composition) is defined in Convention A.5. This definition could also have been presented symmetrically.  $\square$

**Remark B.6:** We also sometimes use the signature  $T^* \in Q \times Q \longrightarrow \mathcal{P}(V^*)$ .  $\square$

**Definition B.7 (Left and right languages):** The left language of a state (in  $M$ ) is given by function  $\overleftarrow{\mathcal{L}}_M \in Q \longrightarrow \mathcal{P}(V^*)$ , where

$$\overleftarrow{\mathcal{L}}_M(q) = (\cup s : s \in S : T^*(s, q))$$

The right language of a state (in  $M$ ) is given by function  $\overrightarrow{\mathcal{L}}_M \in Q \longrightarrow \mathcal{P}(V^*)$ , where

$$\overrightarrow{\mathcal{L}}_M(q) = (\cup f : f \in F : T^*(q, f))$$

The subscript  $M$  is usually dropped when no ambiguity can arise.  $\square$

**Definition B.8 (Language of an FA):** The language of a finite automaton (with alphabet  $V$ ) is given by the function  $\mathcal{L}_{FA} \in FA \longrightarrow \mathcal{P}(V^*)$  defined as:

$$\mathcal{L}_{FA}(M) = (\cup s, f : s \in S \wedge f \in F : T^*(s, f))$$

$\square$

**Definition B.9 (Complete):** A *Complete* finite automaton is one satisfying the following:

$$Complete(M) \equiv (\forall q, a : q \in Q \wedge a \in V : T(q, a) \neq \emptyset)$$

$\square$

**Definition B.10 ( $\epsilon$ -free):** Automaton  $M$  is  $\epsilon$ -free if and only if  $E = \emptyset$ .  $\square$

**Definition B.11 (Start-useful automaton):** A *Useful<sub>s</sub>* finite automaton is defined as follows:

$$Useful_s(M) \equiv (\forall q : q \in Q : \overleftarrow{\mathcal{L}}(q) \neq \emptyset)$$

$\square$

**Definition B.12 (Final-useful automaton):** A *Useful<sub>f</sub>* finite automaton is defined as:

$$Useful_f(M) \equiv (\forall q : q \in Q : \overrightarrow{\mathcal{L}}(q) \neq \emptyset)$$

$\square$

**Remark B.13:** *Useful<sub>s</sub>* and *Useful<sub>f</sub>* are closely related by FA reversal (to be presented in Transformation B.22). For all  $M \in FA$  we have  $Useful_f(M) \equiv Useful_s(M^R)$ .  $\square$

**Definition B.14 (Useful automaton):** A *Useful* finite automaton is one with only reachable states:

$$Useful(M) \equiv Useful_s(M) \wedge Useful_f(M)$$

$\square$

**Property B.15 (Deterministic finite automaton):** A finite automaton  $M$  is deterministic if and only if

- it does not have multiple start states,
- it is  $\epsilon$ -free, and
- transition function  $T \in Q \times V \longrightarrow \mathcal{P}(Q)$  does not map pairs in  $Q \times V$  to multiple states.

Formally,

$$Det(M) \equiv (|S| \leq 1 \wedge \epsilon\text{-free}(E) \wedge (\forall q, a : q \in Q \wedge a \in V : |T(q, a)| \leq 1))$$

□

**Definition B.16 (Deterministic FA's):**  $DFA$  denotes the set of all deterministic finite automata. We call  $FA \setminus DFA$  the set of *nondeterministic finite automata*. □

**Convention B.17 (Transition function of a DFA):** For  $(Q, V, T, \emptyset, S, F) \in DFA$  we can consider the transition function to have signature  $T \in Q \times V \dashrightarrow Q$ . (A definition of  $\dashrightarrow$  appears in Convention A.2.) The transition function is total if and only if the  $DFA$  is *Complete*. □

**Property B.18 (Weakly deterministic automaton):** Some authors use a definition of a deterministic automaton that is weaker than  $Det$ ; it uses left languages and is defined as follows:

$$Det'(M) \equiv (\forall q_0, q_1 : q_0 \in Q \wedge q_1 \in Q \wedge q_0 \neq q_1 : \overleftarrow{\mathcal{L}}(q_0) \cap \overleftarrow{\mathcal{L}}(q_1) = \emptyset)$$

$Det(M) \Rightarrow Det'(M)$  is easily proved. □

**Definition B.19 (Minimality of a DFA):** An  $M \in DFA$  is minimal as follows:

$$Min(M) \equiv (\forall M' : M' \in DFA \wedge \mathcal{L}_{FA}(M) = \mathcal{L}_{FA}(M') : |M| \leq |M'|)$$

Predicate  $Min$  is defined only on  $DFA$ 's. Some definitions are simpler if we define a minimal, but still *Complete*,  $DFA$  as follows:

$$Min_C(M) \equiv (\forall M' : M' \in DFA \wedge Complete(M') \wedge \mathcal{L}_{FA}(M) = \mathcal{L}_{FA}(M') : |M| \leq |M'|)$$

Predicate  $Min_C$  is defined only on *Complete DFA*'s. □

**Property B.20 (Minimality of a DFA):** An  $M$ , such that  $Min(M)$ , is the unique (modulo  $\cong$ ) minimal  $DFA$ , due to the Myhill-Nerode theorem. Introductory presentations of the theorem appear in [HU79, Wats93]. □

**Property B.21 (An alternate definition of minimality of a DFA):** For the purposes of minimizing a  $DFA$ , we use the definition (defined only on  $DFA$ 's):

p,q右语言不相等,就是q0,q1不可合并,即可区分。  
因此,最小的DFA是M中的所有q不可合并(可区分)并且所有状态均可达。

$$\begin{aligned} Minimal(Q, V, T, \emptyset, S, F) \equiv & (\forall q_0, q_1 : q_0 \in Q \wedge q_1 \in Q \wedge q_0 \neq q_1 : \overrightarrow{\mathcal{L}}(q_0) \neq \overrightarrow{\mathcal{L}}(q_1)) \\ & \wedge Useful(Q, V, T, \emptyset, S, F) \end{aligned}$$

We have the property that (for all  $M \in DFA$ )  $Minimal(M) \equiv Min(M)$ . It is easy to prove that  $Min(M) \Rightarrow Minimal(M)$ . The reverse direction follows from the Myhill-Nerode theorem.

A similar definition that relates to  $Min_C$  is (also defined only on  $DFA$ 's):

$$\begin{aligned} Minimal_C(Q, V, T, \emptyset, S, F) \equiv & (\forall q_0, q_1 : q_0 \in Q \wedge q_1 \in Q \wedge q_0 \neq q_1 : \overrightarrow{\mathcal{L}}(q_0) \neq \overrightarrow{\mathcal{L}}(q_1)) \\ & \wedge Useful_s(Q, V, T, \emptyset, S, F) \end{aligned}$$

We have the property that (for all  $M \in DFA$  such that  $Complete(M)$ )  $Minimal_C(M) \equiv Min_C(M)$ . The contrapositive of  $Min_C(M) \Rightarrow Minimal_C(M)$  is easily proved, and the reverse direction also follows from the Myhill-Nerode theorem. □

## B.2 Transformations on finite automata

**Transformation B.22 (FA reversal):** *FA* reversal is given by postfix (superscript) function  $R \in FA \longrightarrow FA$ , defined as:

$$(Q, V, T, E, S, F)^R = (Q, V, T^R, E^R, F, S)$$

Function  $R$  satisfies

$$(\forall M : M \in FA : (\mathcal{L}_{FA}(M))^R = \mathcal{L}_{FA}(M^R)).$$

□

**Transformation B.23 (Removing start state unreachable states):** Transformation  $useful_s \in FA \longrightarrow FA$  removes those states that are not start-reachable:

$$\begin{aligned} useful_s(Q, V, T, E, S, F) = & \text{let } U = SReachable(Q, V, T, E, S, F) \\ & \text{in} \\ & (U, V, T \cap (U \times V \times U), E \cap (U \times U), S \cap U, F \cap U) \\ & \text{end} \end{aligned}$$

Function  $useful_s$  satisfies

$$(\forall M : M \in FA : Useful_s(useful_s(M)) \wedge \mathcal{L}_{FA}(useful_s(M)) = \mathcal{L}_{FA}(M))$$

□

**Transformation B.24 (Subset construction):** The function  $subset$  transforms an  $\epsilon$ -free *FA* into a *DFA* (in the **let** clause  $T' \in \mathcal{P}(Q) \times V \longrightarrow \mathcal{P}(\mathcal{P}(Q))$ )

$$\begin{aligned} subset(Q, V, T, \emptyset, S, F) = & \text{let } T'(U, a) = \{(\cup q : q \in U : T(q, a))\} \\ & F' = \{U : U \in \mathcal{P}(Q) \wedge U \cap F \neq \emptyset\} \\ & \text{in} \\ & (\mathcal{P}(Q), V, T', \emptyset, \{S\}, F') \\ & \text{end} \end{aligned}$$

In addition to the obvious property that (for all  $M \in FA$ )  $\mathcal{L}_{FA}(subset(M)) = \mathcal{L}_{FA}(M)$ , function  $subset$  satisfies

$$(\forall M : M \in FA \wedge \epsilon\text{-free}(M) : Det(subset(M)) \wedge Complete(subset(M)))$$

It is also known as the “powerset” construction. □

**Property B.25 (Subset construction):** Let  $M_0 = (Q_0, V, T_0, \emptyset, S_0, F_0)$  and  $M_1 = subset(M_0)$  be finite automata. By the subset construction, the state set of  $M_1$  is  $\mathcal{P}(Q_0)$ . We have the following property:

$$(\forall p : p \in \mathcal{P}(Q_0) : \vec{\mathcal{L}}_{M_1}(p) = (\cup q : q \in p : \vec{\mathcal{L}}_{M_0}(q)))$$

□

**Definition B.26 (Optimized subset construction):** The function  $subsepto$  transforms an  $\epsilon$ -free *FA* into a *DFA*. This function is an optimized version of  $subset$ .

$$\begin{aligned} subsepto(Q, V, T, \emptyset, S, F) = & \text{let } T'(U, a) = \{(\cup q : q \in U : T(q, a))\} \\ & Q' = \mathcal{P}(Q) \setminus \{\emptyset\} \\ & F' = \{U : U \in \mathcal{P}(Q) \wedge U \cap F \neq \emptyset\} \\ & \text{in} \\ & (Q', V, T' \cap (Q' \times V \times Q'), \emptyset, \{S\}, F') \\ & \text{end} \end{aligned}$$

In addition to the property that (for all  $M \in FA$ )  $\mathcal{L}_{FA}(subsepto(M)) = \mathcal{L}_{FA}(M)$ , function  $subsepto$  satisfies

$$(\forall M : M \in FA \wedge \epsilon\text{-free}(M) : Det(subset(M)))$$

□

## References

- [ASU86] AHO, A.V., R. SETHI, AND J.D. ULLMAN. *Compilers: Principles, Techniques, and Tools*, Addison-Wesley Publishing Co., Reading, M.A., 1988.
- [AU92] AHO, A.V. AND J.D. ULLMAN. *Foundations of Computer Science*, Computer Science Press, New York, N.Y. 1992.
- [Brau88] BRAUER, W. "On minimizing finite automata," EATCS Bulletin 35, June 1988.
- [Brzo62] BRZOWSKI, J.A. "Canonical regular expressions and minimal state graphs for definite events," in *Mathematical theory of Automata*, Vol. 12 of MRI Symposia Series, pp. 529–561, Polytechnic Press, Polytechnic Institute of Brooklyn, N.Y., 1962.
- [Brzo64] BRZOWSKI, J.A. "Derivatives of regular expressions," J. ACM 11(4): 481–494, 1964.
- [Dijk76] DIJKSTRA, E.W. *A discipline of programming*, Prentice-Hall Inc., N.J., 1976.
- [t-Ei91] TEN EIKELDER, H.M.M. "Some algorithms to decide the equivalence of recursive types," Computing Science Note 91/31, Eindhoven University of Technology, The Netherlands, 1991.
- [Grie73] GRIES, D. "Describing an algorithm by Hopcroft," Acta Inf. 2: 97–109, 1973.
- [HU79] HOPCROFT, J.E. AND J.D. ULLMAN. *Introduction to Automata Theory, Languages, and Computation*, Addison-Wesley Publishing Co., Reading, M.A., 1979.
- [Hopc71] HOPCROFT, J.E. "An  $n \log n$  algorithm for minimizing the states in a finite automaton," in *The Theory of Machines and Computations* (Z. Kohavi, ed.), pp. 189–196, Academic Press, New York, 1971.
- [Huff54] HUFFMAN, D.A. "The synthesis of sequential switching circuits," J. Franklin Institute, 257(3): 161–190 and 257(4): 275–303, 1954.
- [Mirk65] MIRKIN, B.G. "On dual automata," Kibernetika 2(1): 7–10, 1966.
- [Moor56] MOORE, E.F. "Gedanken-experiments on sequential machines," in *Automata Studies*, (C.E. Shannon and J. McCarthy, eds.), pp. 129–153, Princeton University Press, Princeton, N.J., 1956.
- [Myhi57] MYHILL, J. "Finite automata and the representation of events," WADD TR-57-624, pp. 112–137, Wright Patterson AFB, Ohio, 1957.
- [Nero58] NERODE, A. "Linear automaton transformations," Proc. AMS 9: 541–544, 1958.
- [RS59] RABIN, M.O AND D. SCOTT. "Finite automata and their decision problems," IBM J. Res. 3(2): 115–125, 1959.
- [vdSn85] VAN DE SNEPSCHEUT, J.L.A. "Trace theory and VLSI design," PhD Thesis, Faculty of Mathematics and Computing Science, Eindhoven University of Technology, The Netherlands, 1985. Also available as Lecture Notes in Computer Science 200, Springer-Verlag, Berlin, 1985.
- [vdSn93] VAN DE SNEPSCHEUT, J.L.A. *What computing is all about*, Springer-Verlag, New York, N.Y., 1993.
- [Urba89] URBANEK, F. "On minimizing finite automata," EATCS Bulletin 39, Oct. 1989.
- [Wats93] WATSON, B.W. "A taxonomy of finite automata constructions," Computing Science Note 93/43, Eindhoven University of Technology, The Netherlands, 1993.
- [Wood87] WOOD, D. *Theory of Computation*, Harper & Row, Publishers, New York, N.Y., 1987.